

Frequency Ranges—
 Broadcast 540-1600 KC
 Frequency modulation 88-108 MC


Intermediate Frequency—
 AM 455 KC — FM 10.7 MC

NOTE — In later production C-33 is .01 mf.

TUBE SOCKET VOLTAGES

Socket voltages are shown on the schematic diagram. All voltages are between the socket terminal and chassis ground. Plate, screen and cathode voltages were taken with a 1000 ohm-per-volt meter with a 300 volt scale used for plate and screen voltages. Audio grid voltages were read with a vacuum tube volt-meter. Conditions of measurement are:

- Line voltage 117 Volts AC
- Signal Input None
- A Variation of $\pm 10\%$ is usually permissible.

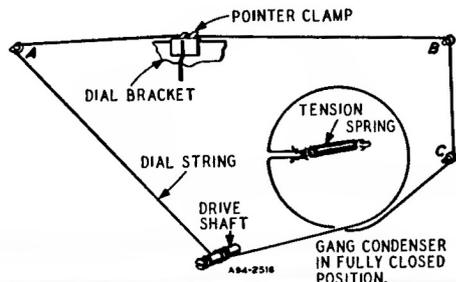

WESTERN AUTO SUPPLY COMPANY

MODEL D1046D

Factory Model 27A96-952

Models D1046 with suffix A, B, and C, and Models D1034A, -B, and -C, are very similar to Model D1046D described on this page.