

Westinghouse

MODELS

H-718T5

(Turquoise/White)


H-719T5

(Ivory/White)


H-720T5

(Coral/White - Pink/White)

CHASSIS V-2401-1

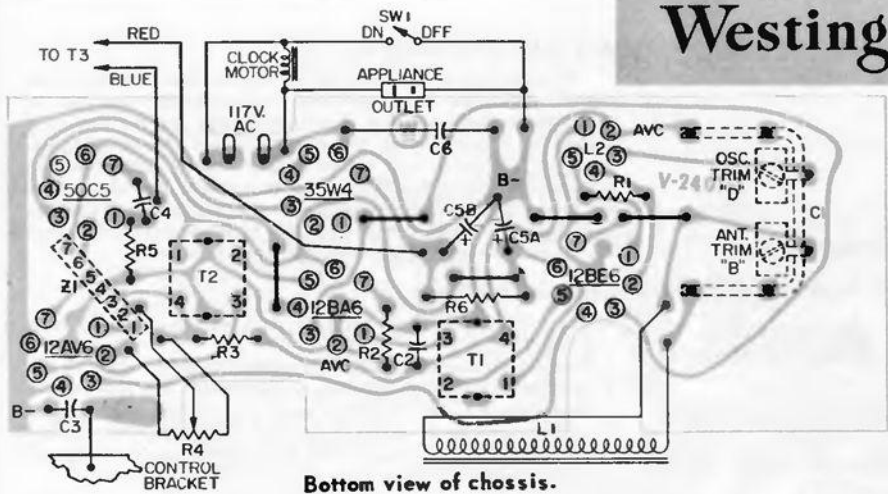

Bottom view of chassis.

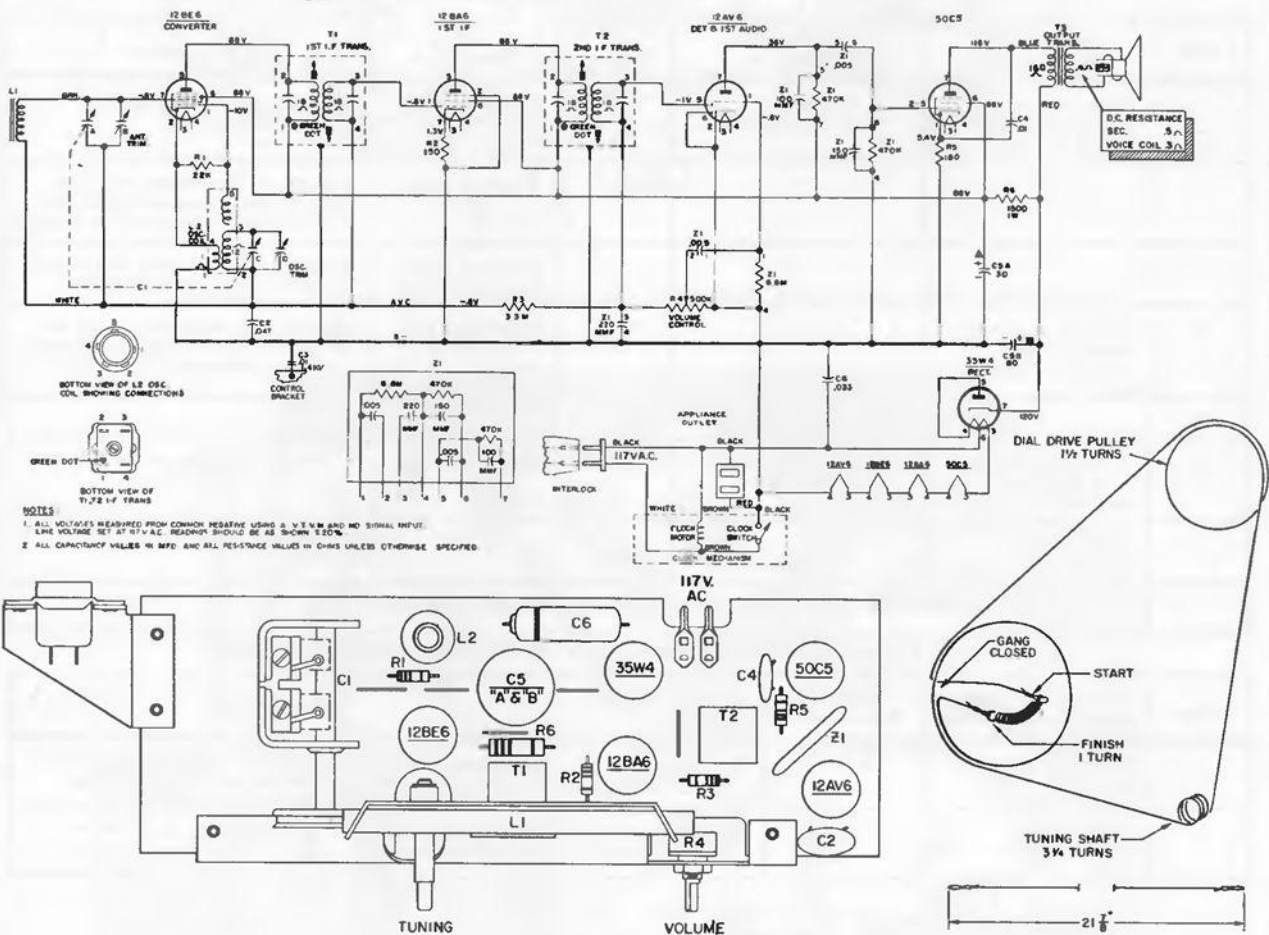

ALIGNMENT

While making the following adjustments, keep the volume control set for maximum output and the signal generator output attenuated to weakest usable signal level.

Step	Connect Signal Generator to –	Signal Gen. Frequency	Radio Dial	Connect VTVM Across Voice Coil and Adjust for Maximum Output –
1	Stator of ant. tuning capacitor (A) through a 200 mmf capacitor.	455KC 400 Cps. 30% Mod.	Minimum capacity	Top and bottom slugs of T2 and T1.
2	Radiated signal	1625 KC	Minimum capacity	Oscillator trimmer (D)
3	Radiated signal	1400 KC	1400 KC	Antenna trimmer (B)