


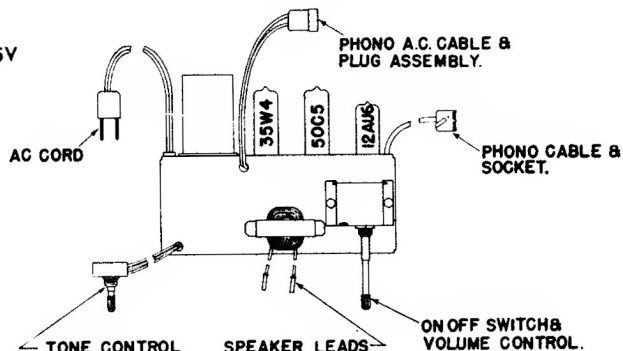
REF.
NO.

DESCRIPTION

C1, 2, 3, 6, 12	.01 Mfd Ceramic	500V (5 used)
C8	470 Mmfd Ceramic disc.	500V
C9	.006 Mfd	600V
C5	.1 Mfd	400V
C7	.001 Mfd Molded	600V
C4	.002 Mfd	200V
C11	.01 Mfd	400V
C10A, B, C, D	Electrolytic 60 x 40 x 20 - 150V x 20 - 25V	

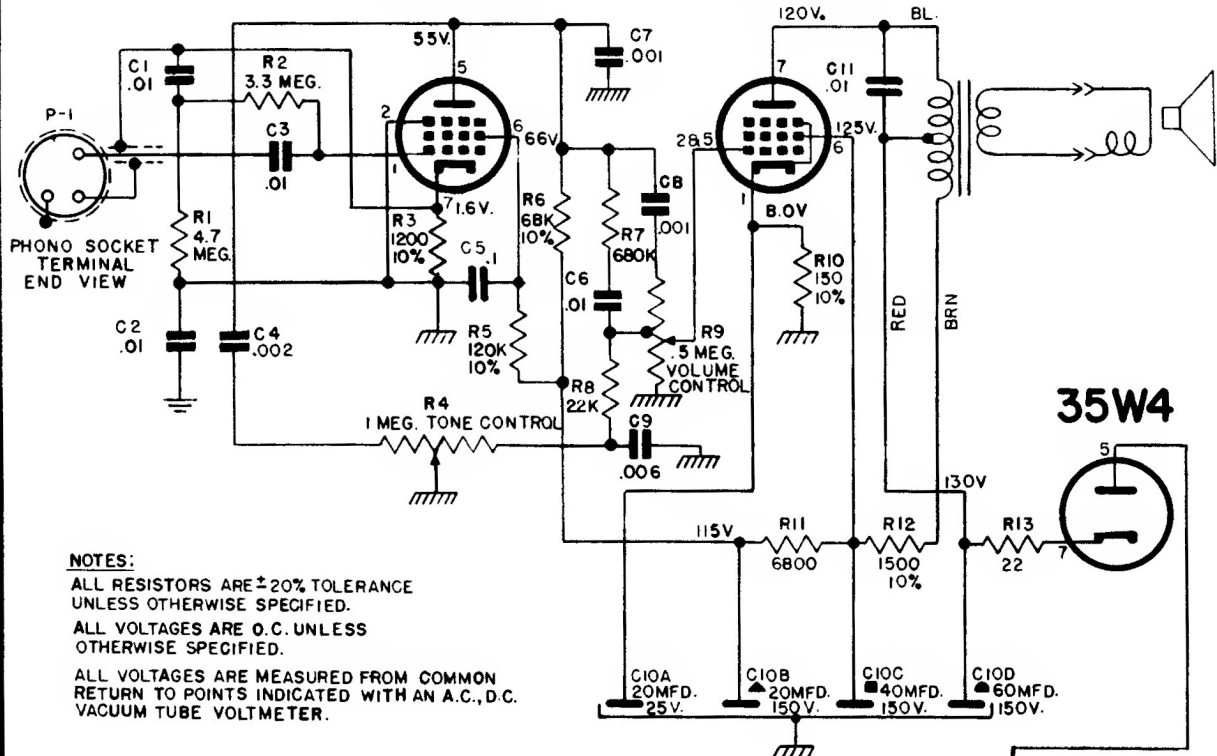
R10	150 ohm	1/2 W	Ins.	10%
	150 ohm	1/2 W	Ins.	10%
R13	22 ohm	1/2 W	Ins.	20%
R3	1200 ohm	1/2 W	Ins.	10%
R12	1500 ohm	1/2 W	Ins.	10%
R11	6800 ohm	1/2 W	Ins.	20%
R8	22K ohm	1/2 W	Ins.	20%
R3	68K ohm	1/2 W	Ins.	10%
R5	120K ohm	1/2 W	Ins.	10%
R7	1 Meg ohm	1/2 W	Ins.	20%
R2	3.3 Meg ohm	1/2 W	Ins.	20%
R1	4.7 Meg ohm	1/2 W	Ins.	20%
R14	150 ohm	5 W	Ins.	10%

ZENITH RADIO CORPORATION

MODEL S-9011 and S-9012
CHASSIS 3L01

12AU6

50C5



NOTES:

ALL RESISTORS ARE $\pm 20\%$ TOLERANCE
UNLESS OTHERWISE SPECIFIED.ALL VOLTAGES ARE O.C. UNLESS
OTHERWISE SPECIFIED.ALL VOLTAGES ARE MEASURED FROM COMMON
RETURN TO POINTS INDICATED WITH AN A.C., D.C.
VACUUM TUBE VOLTMETER.

 DESIGNATES
CHASSIS GROUND

 DESIGNATES
B-
