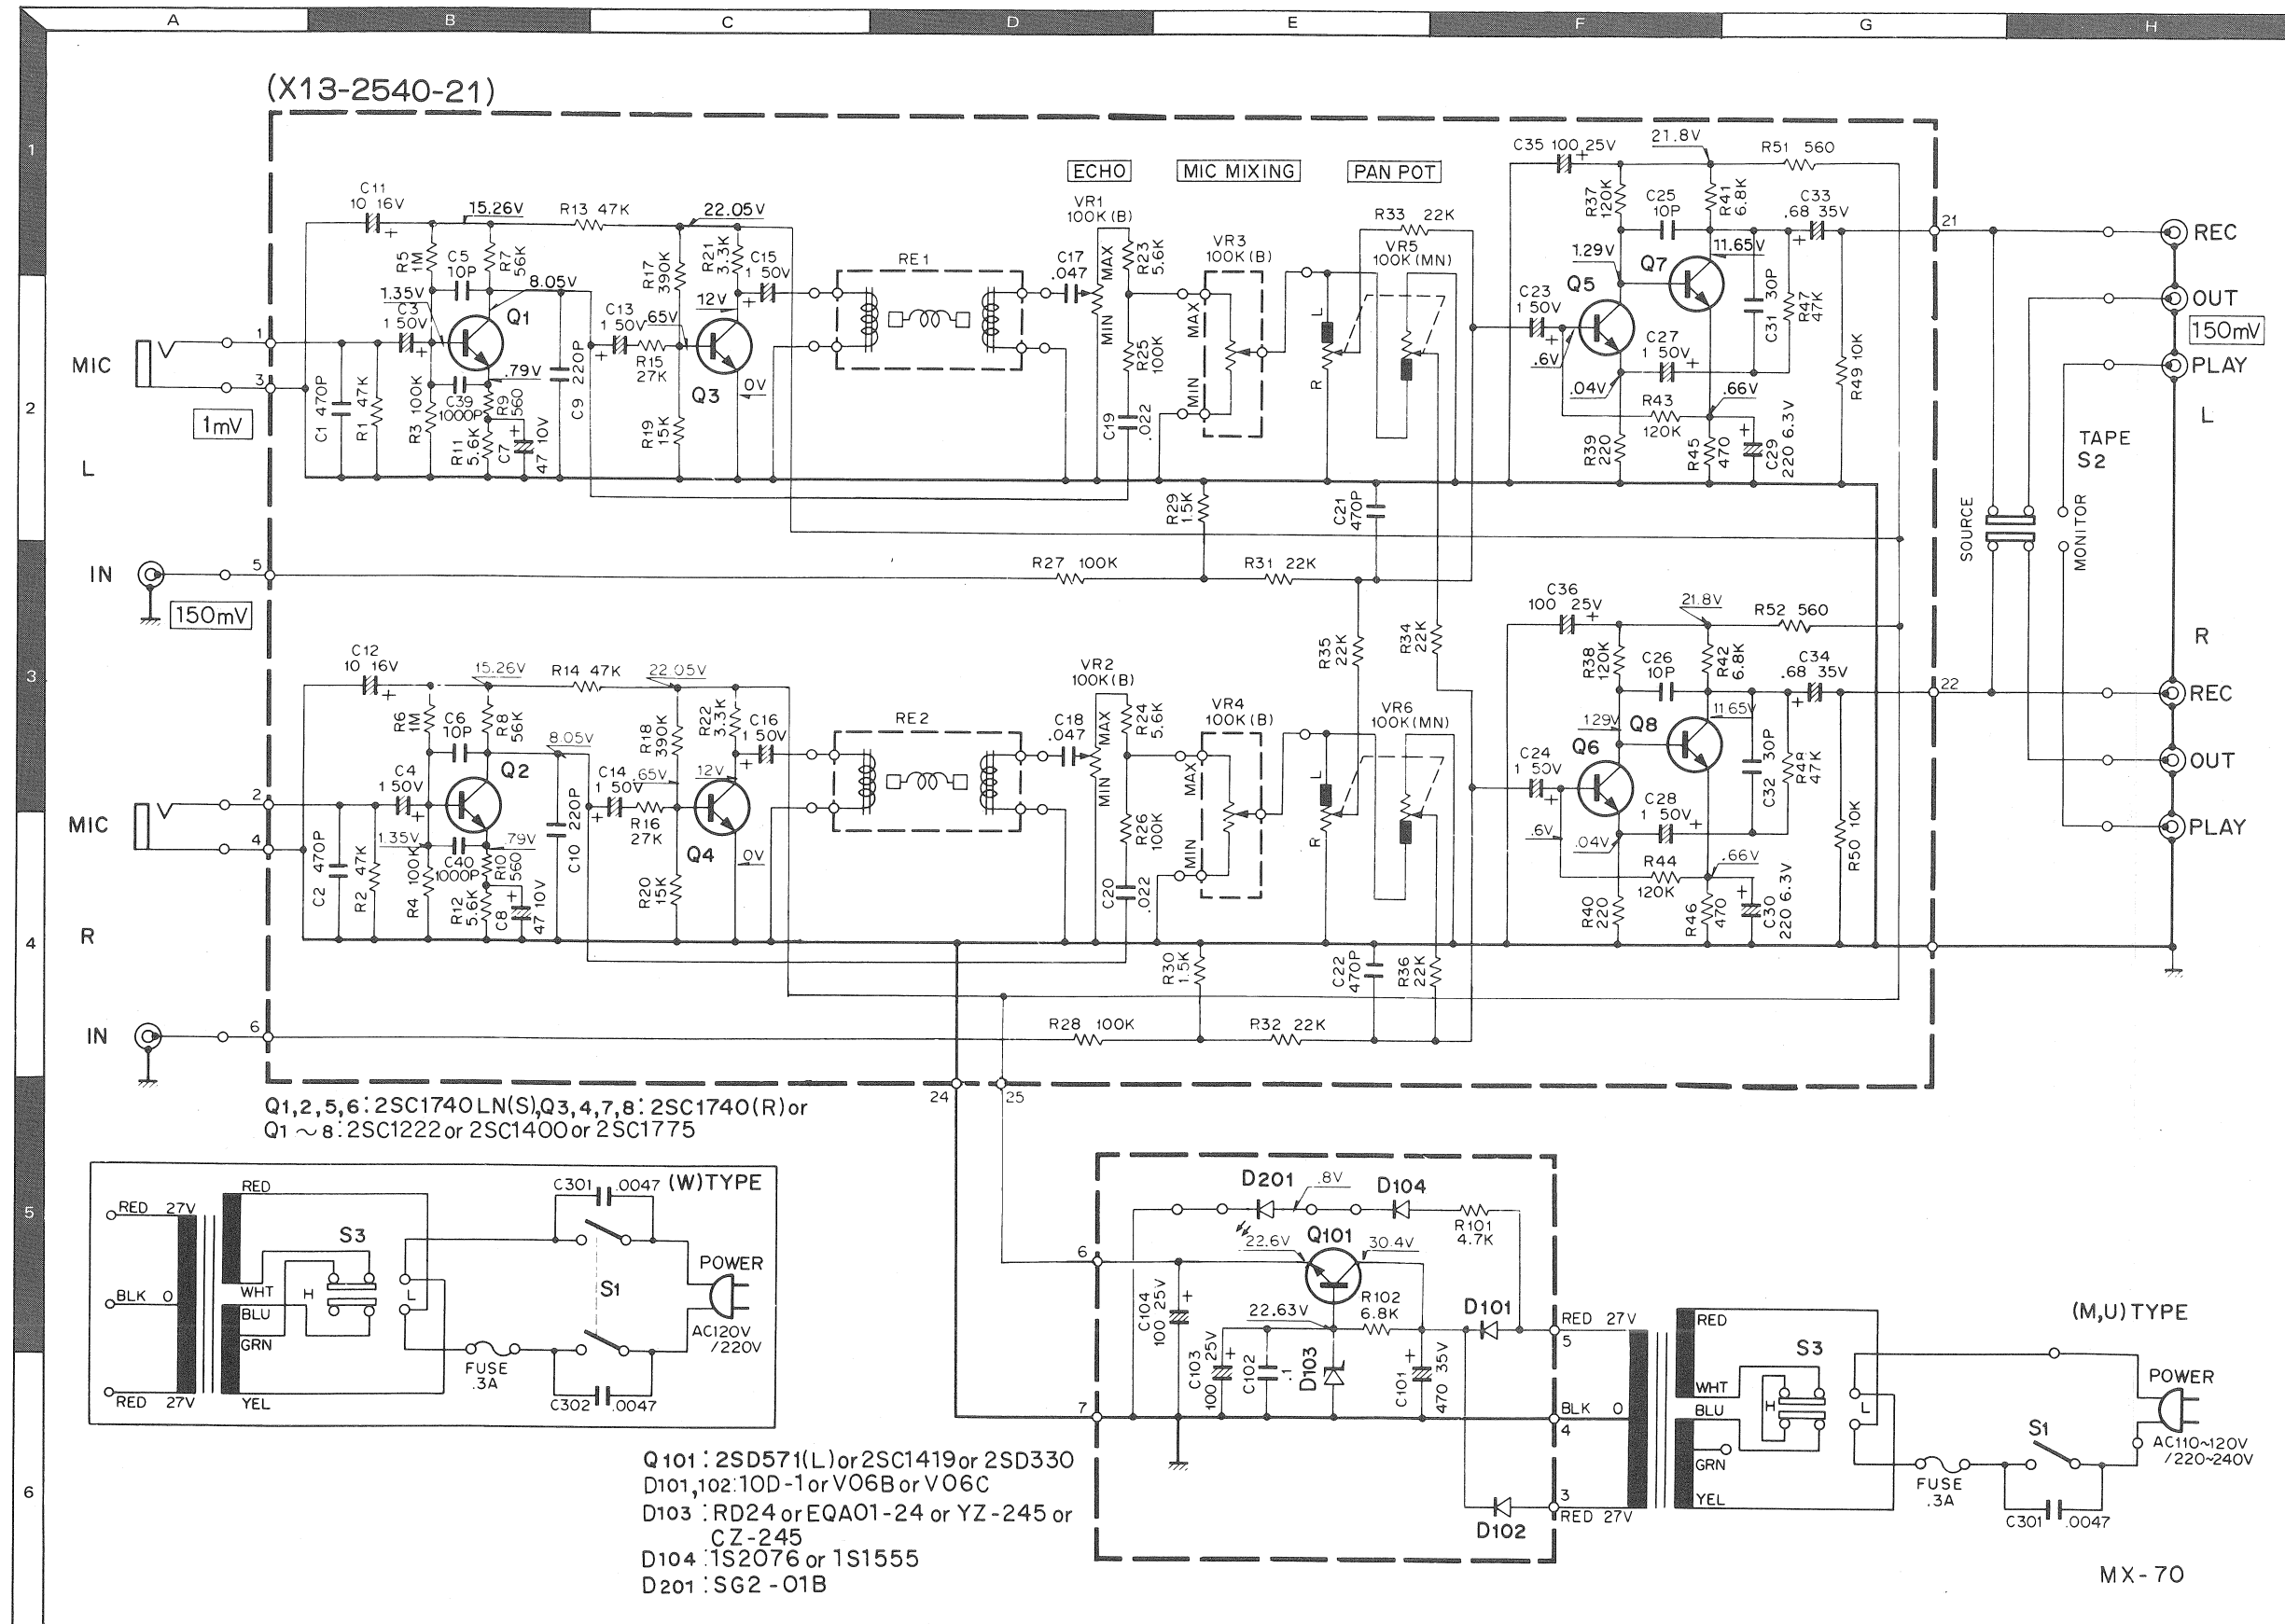


SPECIFICATIONS


PERFORMANCE

Microphone Input Sensitivity	1 mV
Microphone Impedance	accept from 600 ohms to 10 kohms
Line Input Sensitivity	150 mV
Output Level	150 mV
Frequency Response	
Microphone Input	70 Hz – 15 kHz
Line Input	20 Hz – 20 kHz
Reverberation Time	1.5 seconds
Distortion	0.5%


GENERAL

Power Requirement	50/60 Hz 110 – 120 V /220 – 240 V
Power Consumption	5 W
Dimension	W 6 – 8/32" (160 mm) H 2 – 26/32" (71 mm) D9 – 31/32" (253 mm)
Weight	
(Net)	2.87 lbs. (1.3 kg)
(Gross)	3.53 lbs. (1.6 kg)


2SC1222 2SC1775
2SC1400 2SC1740



2SD571



2SC1419
2SD330



Note: Kenwood follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.