

<b>SANYO</b>	No.687G	<b>2SB825/2SD1061</b>
		PNP/NPN Epitaxial Planar Silicon Transistors <b>50V/7A Switching Applications</b>

**Use :** Universal high current switching as solenoid driving, high speed inverter and converter.

**Features**

- Low saturation voltage :  $V_{CE(sat)} = (-)0.4V$  max.
- Wide ASO.

( ) 2SB825

**Absolute Maximum Ratings at  $T_a = 25^\circ C$**

			unit
Collector-to-Base Voltage	$V_{CBO}$	(-)60	V
Collector-to-Emitter Voltage	$V_{CEO}$	(-)50	V
Emitter-to-Base Voltage	$V_{EBO}$	(-)6	V
Collector Current	$I_C$	(-)7	A
Collector Current(Pulse)	$I_{CP}$	(-)12	A
Collector Dissipation	$P_C$	40	W
Junction Temperature	$T_j$	150	$^\circ C$
Storage Temperature	$T_{stg}$	-55 to +150	$^\circ C$

$T_C = 25^\circ C$


**Electrical Characteristics at  $T_a = 25^\circ C$**

			min	typ	max	unit
Collector Cutoff Current	$I_{CBO}$	$V_{CB} = (-)40V, I_E = 0$			(-)0.1	mA
Emitter Cutoff Current	$I_{EBO}$	$V_{EBO} = (-)4V, I_C = 0$			(-)0.1	mA
DC Current Gain	$h_{FE(1)}$	$V_{CE} = (-)2V, I_C = (-)1A$	70*		280*	
	$h_{FE(2)}$	$V_{CE} = (-)2V, I_C = (-)5A$	30			
Gain Bandwidth Product	$f_T$	$V_{CE} = (-)5V, I_C = (-)1A$		10		MHz
C-E Saturation Voltage	$V_{CE(sat)}$	$I_C = (-)4A, I_B = (-)0.4A$			(-)0.4	V
C-B Breakdown Voltage	$V_{(BR)CBO}$	$I_C = (-)1mA, I_E = 0$	(-)60			V
C-E Breakdown Voltage	$V_{(BR)CEO}$	$I_C = (-)1mA, R_{BE} = \infty$	(-)50			V
E-B Breakdown Voltage	$V_{(BR)EBO}$	$I_E = (-)1mA, I_C = 0$	(-)6			V
Turn-ON Time	$t_{on}$	At the test circuit.		0.2		$\mu s$
Fall Time	$t_f$	"	(0.1)0.3			$\mu s$
Storage Time	$t_{stg}$	"	(0.7)0.9			$\mu s$

\* : 2SB825 / 2SD1061 are classified by 1A  $h_{FE}$  as follows.

70 Q 140	100 R 200	140 S 280
----------	-----------	-----------

**Switching Time Test Circuit**

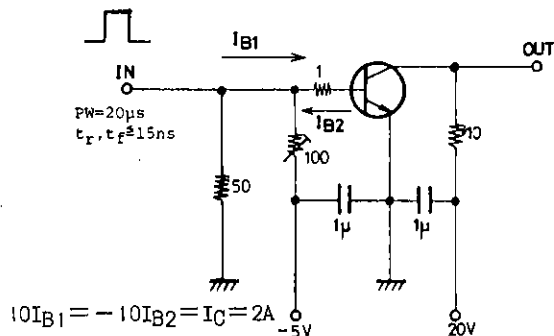


(For PNP, the polarity is reversed.)

Unit (resistance:  $\Omega$ , capacitance: F)









**Package Dimensions 2010B**

(unit:mm)



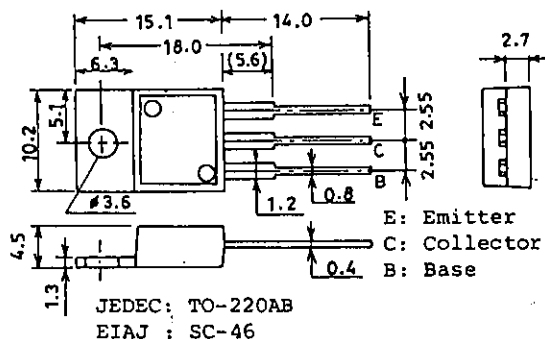


E: Emitter  
C: Collector  
B: Base

2SB825 / 2SD1061

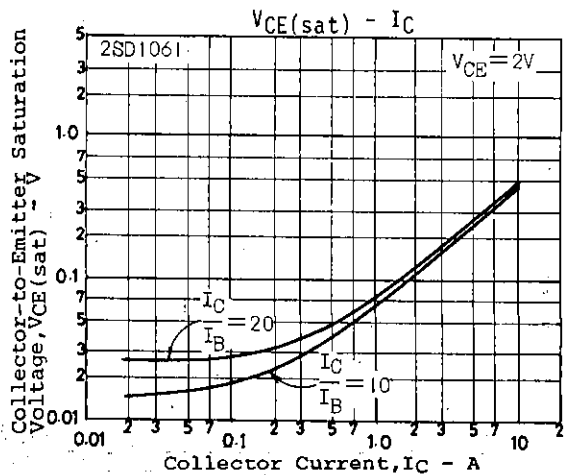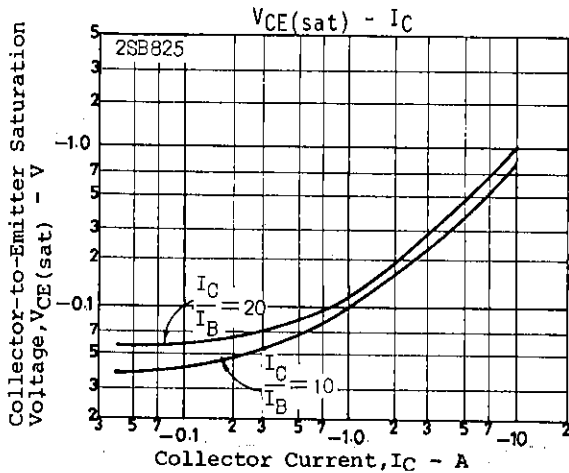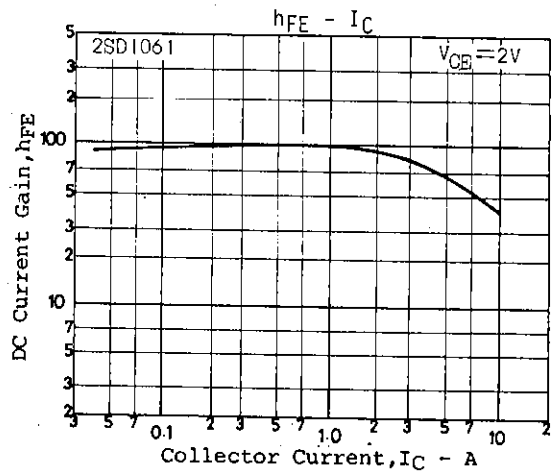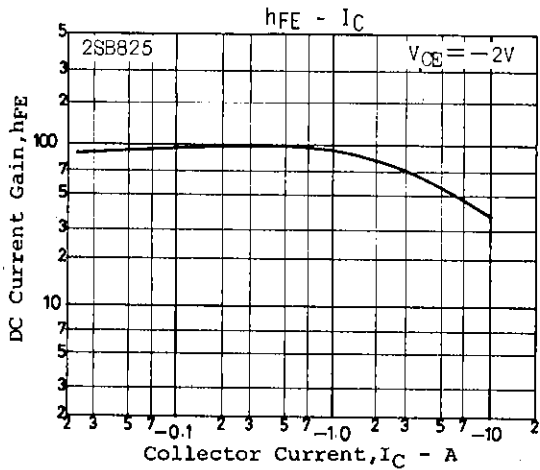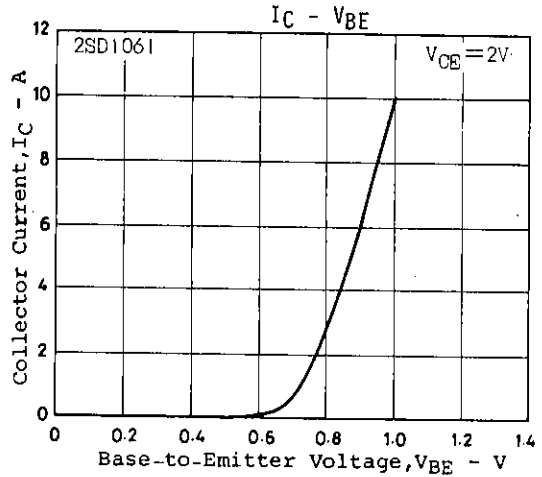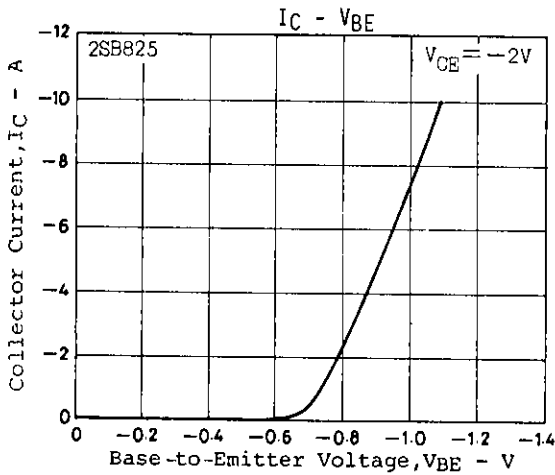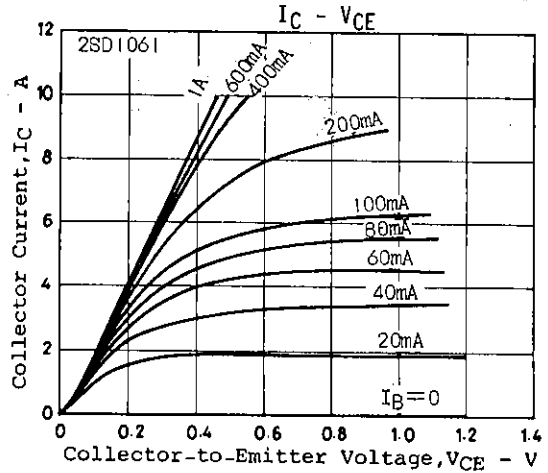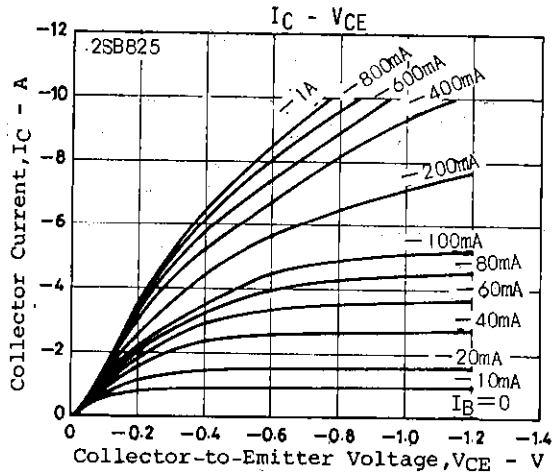

2SB825 / 2SD1061

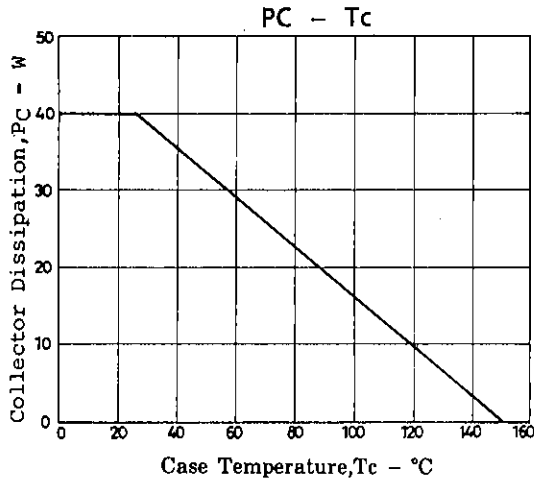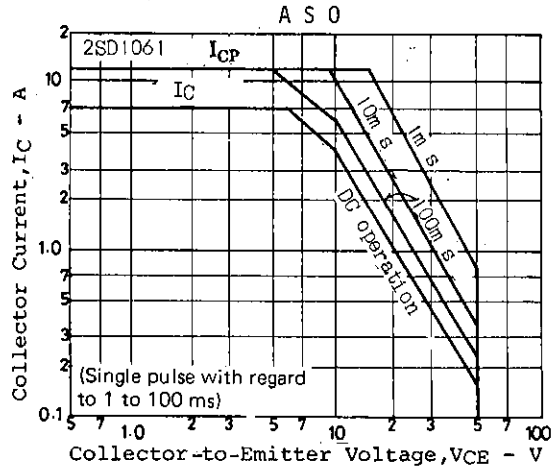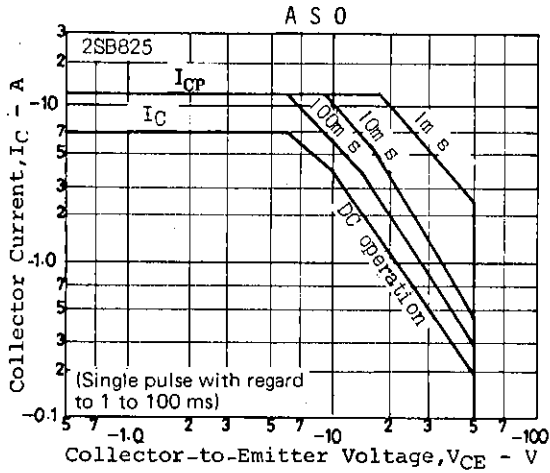

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
  - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
  - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.