
SERVICE MANUAL


CS-1022,CS-1021,CS-1012

(DUAL TRACE OSCILLOSCOPE)

CS-1020,CS-1010

(SINGLE TRACE OSCILLOSCOPE)

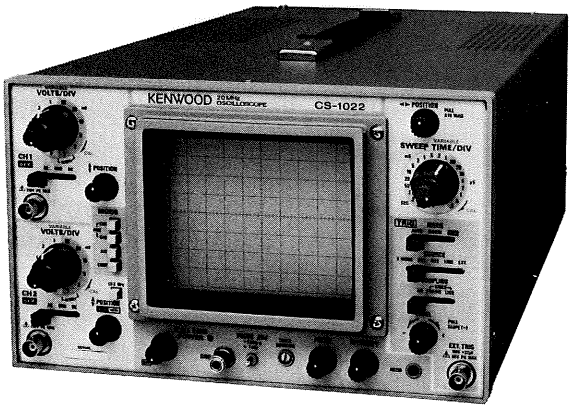

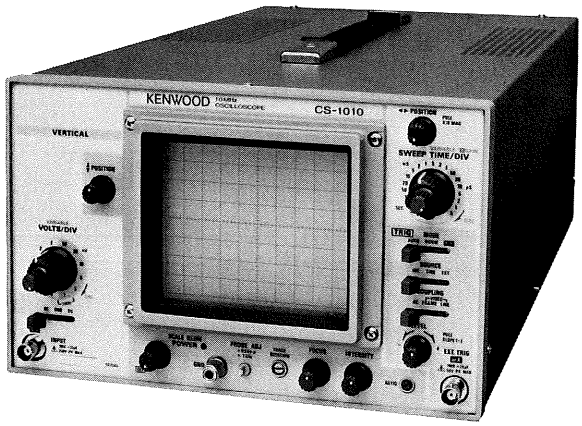

KENWOOD

CONTENTS

SPECIFICATIONS 2
SAFETY 6
CIRCUIT DESCRIPTION 7, 9
BLOCK DIAGRAM 8, 10
ADJUSTMENT 11
TROUBLESHOOTING 15
PARTS LIST 17
SEMICONDUCTORS 38
DISASSEMBLY 39
P.C. BOARD 40
SCHEMATIC DIAGRAM 41

WARNING

1. The following instructions are for use by qualified personnel only. To avoid electric shock, do not perform servicing other than contained in the operating instructions unless you are qualified to do so.

2. High voltage up to 6000 volts (for CS-1021, 1012, 1010, 2000 volts) dc is present when the oscilloscope is operating. Line voltage (100 to 240 VAC) is present on the power transformer, on-off switch, fuse holder, and line voltage selector any time the oscilloscope is connected to an ac power source, even if turned off. Always observe caution when the housing is removed from the unit. Contacting exposed high voltage could result in fatal electric shock.

NOTE:

The description of the dual-trace oscilloscope in this Service Manual is based on CS-1021.
The shaded parts cannot be applied to CS-1021.

SPECIFICATIONS

	CS-1022	CS-1021	CS-1012	CS-1020	CS-1010
CRT	150FTM31	150GTM31A	150GTM31A	150FTM31	150GTM31A
Acceleration Voltage	6 kV	2 kV	2 kV	6 kV	2 kV
Display Area	8 × 10 div (1 div = 10 mm)				
Type	Rectangular, with internal graticule				
VERTICAL AXIS	**CH1 and CH2**			–	
Sensitivity	1 mV/div to 5 V/div, ±3%				
Attenuator	12 steps, 1 mV/div to 5 V/div in 1-2-5 sequence. Vernier control for fully adjustable sensitivity between steps.				
Input Impedance	1 MΩ ±2%, approx 35pF				
Frequency Response 2 mV/div to 5 V/div 1 mV/div	DC; DC to 20 MHz, −3 dB AC; 5 Hz to 20 MHz, −3 dB DC; DC to 10 MHz, −3 dB AC; 5 Hz to 10 MHz, −3 dB		DC; DC to 10 MHz, −3 dB AC; 5 Hz to 10 MHz, −3 dB DC; DC to 7 MHz, −3 dB AC; 5 Hz to 7 MHz, −3 dB	DC; DC to 20 MHz, −3 dB AC; 5 Hz to 20 MHz, −3 dB DC; DC to 10 MHz, −3 dB AC; 5 Hz to 10 MHz, −3 dB	DC; DC to 10 MHz, −3 dB AC; 5 Hz to 10 MHz, −3 dB DC; DC to 7 MHz, −3 dB AC; 5 Hz to 7 MHz, −3 dB
Rise Time	17.5 nsec or less (20 MHz) 35 nsec or less (10 MHz)		35 nsec or less (10 MHz) 50 nsec or less (7 MHz)	17.5 nsec or less (20 MHz) 35 nsec or less (10 MHz)	35 nsec or less (10 MHz) 50 nsec or less (7 MHz)
Crosstalk	−40 dB minimum			–	
Operating Modes	CH1; single trace CH2; single trace ADD; CH1 + CH2 added display ALT; two waveforms alternating CHOP; two waveforms chopped			–	
Chop Frequency	Approx. 250 kHz			–	
Channel Polarity	Normal or inverted, CH2 only inverted			–	
Maximum Input voltage	500 Vp-p or 250 V (DC + AC peak)				
Non-Distorted Maximum Amplitude	More than 8 div, DC to 20 MHz	More than 6 div, DC to 20 MHz	More than 6 div, DC to 10 MHz	More than 8 div, DC to 20 MHz	More than 6 div, DC to 10 MHz
HORIZONTAL AXIS	**(input thru CH2, × 10 MAG not included)**			**(× 10 MAG not included)**	
Operating Mode	With TRIG MODE switch, X-Y operation is selectable. CH1; Y axis CH2; X axis			With TRIG MODE switch, X-Y operation is selectable. VERT. INPUT; Y axis EXT TRIG INPUT; X axis	
Sensitivity	Same as vertical axis (CH2)			100 mV/div	
Input Impedance	Same as vertical axis (CH2)			1 MΩ ±2%, approx. 32pF	1 MΩ ±2%, approx. 35 pF
Frequency Response	DC; DC to 1 MHz, −3 dB AC; 5 Hz to 1 MHz, −3 dB	DC; DC to 500 kHz, −3 dB AC; 5 Hz to 500 kHz, −3 dB		DC; DC to 1 MHz, −3 dB	DC; DC to 500 kHz, −3 dB
X-Y Phase Difference	3° or less at 100 kHz	3° or less at 50 kHz		3° or less at 100 kHz	3° or less at 50 kHz
Maximum Input Voltage	Same as vertical axis (CH2)			50 V (DC + AC peak)	
SWEEP					
Type NORM	Triggering sweep				
AUTO	Sweep free runs in absence of trigger				

SPECIFICATIONS

	CS-1022	CS-1021	CS-1012	CS-1020	CS-1010
Sweep Time	0.2 μs/div to 0.5 s/div, ±3% in 20 ranges, in 1-2-5 sequence. Vernier control provides fully adjustable sweep time between steps.	0.5 μs/div to 0.5 s/div, ±3% in 19 ranges, in 1-2-5 sequence. Vernier control provides fully adjustable sweep time between steps.		0.2 μs/div to 0.5 s/div, ±3% in 20 ranges, in 1-2-5 sequence. Vernier control provides fully adjustable sweep time between steps.	0.5 μs/div to 0.5 s/div, ±3% in 19 ranges, in 1-2-5 sequence. Vernier control provides fully adjustable sweep time between steps.
Sweep Magnification	×10 (ten times) ±5%				
Linearity	±3% all ranges, ±5% on 0.2 μs/div range at ×10 magnification.				
TRIGGERING					
Internal Sync	V. MODE; Triggered by input signal selected by vertical MODE setting. CH1; Triggered by CH1 signal CH2; Triggered by CH2 signal LINE; Triggered by line voltage			INT; Triggered by vertical input signal LINE; Triggered by line voltage	
External Sync	EXT; Triggered by signal applied to EXT TRIG INPUT jack				
External sync Input Impedance	1 MΩ, ±2% approx 32pF	1 MΩ, ±2% approx 35pF		1 MΩ, ±2% approx 30pF	
Maximum External Trigger Voltage	50 V (DC+AC peak)				
Coupling	AC, VIDEO FRAME, VIDEO LINE				
Tigger Sensitivity					

	CS-1022 FREQ, RANGE	INT	EXT	CS-1021 FREQ, RANGE	INT	EXT	CS-1012 FREQ, RANGE	INT	EXT	CS-1020 FREQ, RANGE	INT	EXT	CS-1010 FREQ, RANGE	INT	EXT
AUTO	20Hz to 20MHz	1div	0.1Vp-p	20Hz to 20MHz	1div	0.2Vp-p	20Hz to 10MHz	1div	0.1Vp-p	20Hz to 20MHz	1div	0.1Vp-p	20Hz to 10MHz	1div	0.1Vp-p
NORM	10Hz to 20MHz	1div	0.1Vp-p	10Hz to 20MHz	1div	0.2Vp-p	10Hz to 10MHz	1div	0.1Vp-p	10Hz to 20MHz	1div	0.1Vp-p	10Hz to 10MHz	1div	0.1Vp-p
VIDEO	FRAME, LINE	1div	0.1Vp-p	FRAME, LINE	1div	0.2Vp-p	FRAME, LINE	1div	0.1Vp-p	FRAME, LINE	1div	0.1Vp-p	FRAME, LINE	1div	0.1Vp-p

PROBE ADJ. VOLTAGE	0.5 V, ±6%, square wave, positive polarity, approx 1 kHz				
INTENSITY MODULATION					
Sensitivity	TTL compatible Positive voltage increases brightness. Negative voltage decreases brightness.				
Input Impedance	Approx 10 kΩ				
Usable Frequency Range	DC to 2 MHz	DC to 1 MHz		DC to 2 MHz	DC to 1 MHz
Maximum Input Voltage	50 V (DC+AC peak)				
VERTICAL AXIS SIGNAL OUTPUT	CH1 SIGNAL OUTPUT	—	CH1 SIGNAL OUTPUT	VERTICAL SIGNAL OUTPUT	
Output Voltage	Approx. 50mV/div (50 Ω load)	—	Approx 50 mV/div (50 Ω load)		
Output Impedance	Approx 50 Ω	—	Approx 50 Ω		
Frequency Response	100 Hz to 20 MHz, −3 dB (50 Ω load)	—	100 Hz to 10 MHz, −3 dB (50 Ω load)	100 Hz to 20 MHz, −3 dB (50 Ω load)	100 Hz to 10 MHz, −3 dB (50 Ω load)
TRACE ROTATION	Electrical, adjustable from front panel				
POWER REQUIREMENT	AC 100/120/220/240 V ±10% 50/60 Hz				
Power Consumption	Approx 43 W	Approx 39 W	Approx 41W	Approx 38W	Approx 36W
DIMENSIONS	**( ) dimensions include protrusions from basic outline dimensions.**				
Width	260 mm (260 mm)				
Height	160 mm (180 mm)				
Depth	400 mm (460 mm)				

SPECIFICATIONS

	CS-1022	CS-1021	CS-1012	CS-1020	CS-1010
WEIGHT	Approx. 8.8 kg	Approx. 8.4 kg			Approx. 8.1 kg
ENVIRONMENT					
Operating Temperature and Humidity for Guaranteed Specifications	0°C to 40°C, 85% maximum RH				
Full Operating Temperature and Humidity	0°C to 50°C, 90% maximum RH				
ACCESSORIES					
Probe	2			1	
Instruction Manual	1				
Replacement Fuse 0.8 A	2				
0.5 A	2				

■ Circuit and rating are subject to change without notice due to developments in technology.

STANDARD ACCESSORIES INCLUDED

Probe (PC-20) Y87-1840-00
- Attenuation.....1/10, 1/1
- Input Impedance
  - 1/10 .....10 MΩ, 18pF or less
  - 1/1 .....1 MΩ, 100pF or less

Instruction Manual.....B50-7570-00
Replacement Fuse
- 0.8 A F05-8015-05
- 0.5 A F05-5013-05

OPTIONAL ACCESSORIES

Probe Pouch (MC-78).....Y87-1600-00
Service Manual B51-1033-10

SPECIFICATIONS

CRT 150FTM 31 SPECIFICATIONS (150GTM31A)

Screen and Shape

Dimensions;

Overall length;	330 mm max. (355mm max)
Face plate dimensions;	149.3±3 mm max. (149±3 mm)
Screen shape;	Rectangular flat face, internal graticule, non-metal back
Deflection and focusing system;	Electrostatic deflection, electrostatic focusing and post-deflection acceleration (150FTM 31 only)
Color;	Green
Persistence;	Medium short
Useful display area	Y axis.....80 mm X axis.....100 mm

Heating

Heater voltage	6.0 V (6.3 V)
Heater current	75 mV (95 mA)

Weight 900 gr (1000 gr)

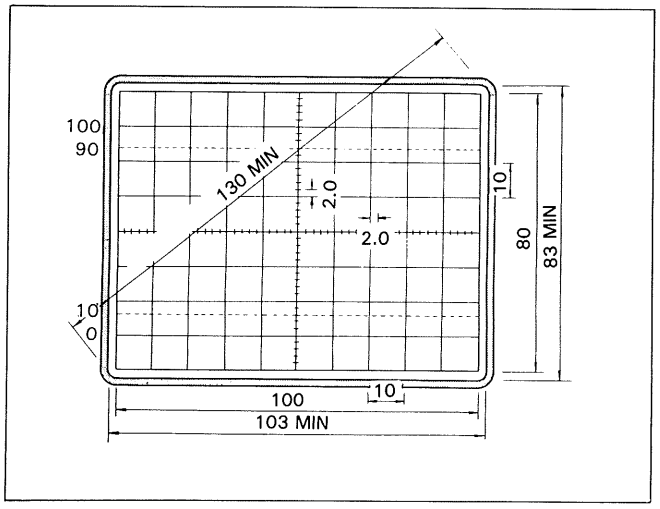


Fig. 1 150GTM31A 150FTM31 Graticule

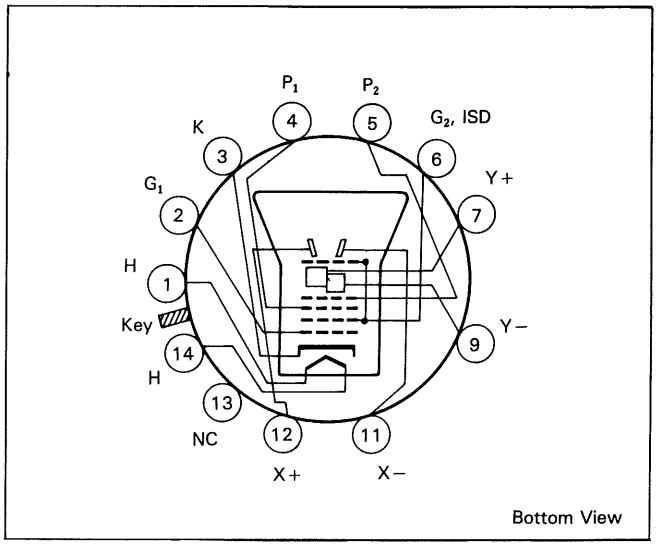


Fig. 2 150GTM31A Basing

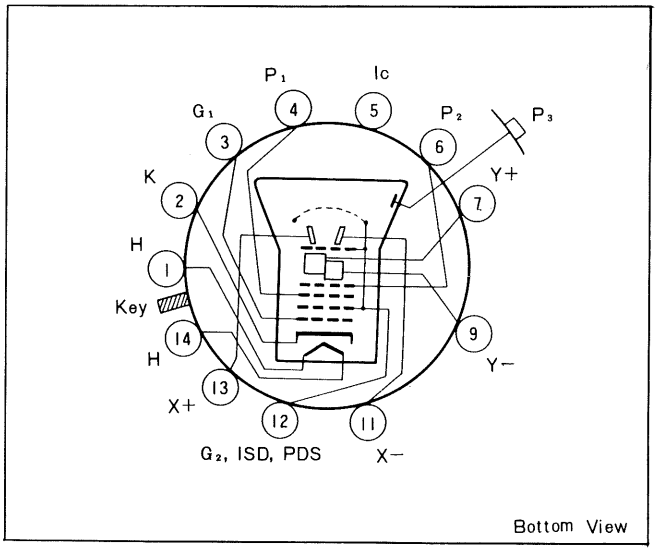


Fig. 3 150FTM31 Basing

SAFETY

Before connecting the instrument to a power source, carefully read the following information, then verify that the proper power cord is used and the proper line fuse is installed for power source. The specified voltage is shown at the left side of the power cord on the rear panel. If the power cord is not applied for specified voltage, there is always a certain amount of danger from electric shock.

Line voltage

This instrument operates using ac-power input voltages that 100/120/220/240 V at frequencies from 50 Hz to 60 Hz.

Power cord

The ground wire of the 3-wire ac power plug places the chassis and housing of the oscilloscope at earth ground. Do not attempt to defeat the ground wire connection or float the oscilloscope; to do so may pose a great safety hazard. The appropriate power cord is supplied by an option that is specified when the instrument is ordered.

The optional power cords are shown as follows in Fig. 4.

Line fuse

The fuse holder is located on the rear panel and contains the line fuse. Verify that the proper fuse is installed by replacing the line fuse.

Voltage conversion

This oscilloscope may be operated from either a 100 V to 240 V, 50/60 Hz power source. Use the following procedure to change from 100- to 240 volt operation or vice versa.

1. Remove the top section of case.
2. Unplug the leadwire of the voltage selector P5 located on the connection unit (X77-1260).
3. Reinsert it for appropriate voltage range.
4. Replace fuse F 1 with a fuse of appropriate value, 0.8 amp for 100 VAC to 120 VAC operation, 0.5 amp for 220 VAC to 240 VAC operation.
5. When performing the reinsertion of leadwire for the voltage conversion the appropriate power cord should be used. (See Fig. 4.)





Plug configuration	Power cord and plug type	Factory installed instrument fuse	Line cord plug fuse	Parts No. for power cord and plate
	North American 120 volt/60 Hz Rated 15 amp (12 amp max; NEC)	0.8 A, 250 V Fast blow AGC/3AG	None	Cord: E30-1854-05 Plate: J21-2977-04
	Universal Europe 220 volt/50 Hz Rated 16 amp	0.5 A, 250 V Fast blow 5 × 20 mm	None	Cord: E30-1852-05 Plate: J21-2973-04
	U.K. 240 volt/50 Hz Rated 13 amp	0.5 A, 250 V Fast blow 5 × 20 mm	0.5 A Type C	—
	Australian 240 volt/50 Hz Rated 10 amp	0.5 A, 250 V Fast blow 5 × 20 mm	None	Cord: E30-1853-05 Plate: J21-2972-04
	North American 240 volt/60 Hz Rated 15 amp (12 amp max; NEC)	0.5 A, 250 V Fast blow AGC/3AG	None	—
	Switzerland 240 volt/50 Hz Rated 10 amp	0.5 A, 250 V Fast blow AGC/3AG 5 × 20 mm	None	—

Fig. 4 Power Input Voltage Configuration

VERTICAL ATTENUATOR

The attenuators of channel 1 and channel 2 are mounted on two independent circuit board which are the same.
The vertical input signal coming to the BNC input receptacle enters a first- stage attenuator with path selected with the AC-GND-DC switch.
It then comes to one of the 1:1, 1:10, 1:100 attenuators which the vertical rotary switch selects before it enters the attenuator of the second stage. This attenuator consists of U1 and U2 and provides an attenuation sequence of 1-2-5.
For the ranges of 1, 2, and 5mV/div, an amplifier consists of U3 and Q2 - 4 is used. For the adjustment of step ATT balance, VR2 is used in the ranges of 10 mV/div or more.
For the ranges of 1, 2, 5mV/div, VR3 adjusts coarsely and VR4 does finely. VR2 and VR4 are accessible from the outside.
Trimmer TC 5 adjusts frequency response of the amplifier operating for ranges of 1, 2, and 5mV/div. It should be adjusted to obtain square wave and frequency response of the 10 mV/div range also in the other three ranges.

VERTICAL AMPLIFIER

The signal which has passed the attenuators comes to a preamplifier consisting of U1 and Q2 - 4 (CH2 ; U101 and Q102 - 104). Variable resistor VR1 (101) provided for the preamplifier allows to vary vertical position.
The preamplifier output comes to not only the vertical mode selector but in CH1, the CH1 OUTPUT circuit consiting of Q6 - 8 from which it is sent to the outside via a 22 μF capacitor for AC coupling.
Another component of the preamplifier output comes to the base of Q5 (105) and after being selected with the TRIG SOURCE switch, passes through the emitter follower Q5 (105) over to a trigger amplifier which generates a trigger signal from the input. The channel 2 signal is used also as X-signal and VR102 adjusts offset for X POSITION centering.
The vertical mode switching circuit is a cascode amplifier comprising Q9 - 12 (107 - 110) whose outputs to Q13, 14 are controlled by two signals, CH1 - ENABLE and CH2 ENABLE, supplied from the vertical switching signal generator of the horizontal & high voltage unit.
Channel 2 is provided with the CH2 polarity inverter which comprises Q111, 112 and switched by switch S102.
VR104 allows to center during CH2 INVERT in relation to the condition during NORMAL.
Two cascode amplifiers of channel 1 and channel 2 of the vertical mode switching circuit are provided with trimmer capacitors TC101 (102) permitting adjustment of square wave and frequency response at high frequencies and semi-fixed variable resistor VR103 permitting to adjust channel 1 gain.
Since both channels are on during ADD, current is supplied to the vertical switching circuits from the circuits of Q113, 114 which are controlled by CH1-E and CH2-E signals. The vertical switching output is given not only to the vertical output amplifier but also to the base of Q115 from which it goes as the V MODE trigger signal to the trigger amplifier.
The output amplifier is a cascode amplifier comprising Q15 - 18 and provided with VR4 permitting CRT center adjustment, VR3 permitting operating level adjustment, VR5 permitting gain adjustment, and VR6 plus TC1, 2 permitting square wave and frequency response adjustment.

TRIGGER AND SWEEP CIRCUITS

The trigger (or X-axis) signal coming from the vertical amplifier enters the trigger amplifier of Q101 - 104 with path selected by the TRIG SOURCE switch. During X-Y mode, the channel 2 signal passes Q117 to the horizontal output amplifier comprising Q118 and Q120 - 127.
During sweep mode, the trigger signal entering the trigger amplifier divides into AC and VIDEO signals. The VIDEO signal passes the video-sync signal separator which separates vertical and horizontal sync signals from the video signal. Then it comes to the TRIG COUPLING switch and appears, after shaped by a Schmitt circuit, as the clock signal of sweep control gate U102b.
The auto-sweep circuit comprising U101a, b, d and U103a checks for the presence of the output of U101c and performs free-run operation if the signal is absent and mode is AUTO.
The output of the sweep control gate is controlled by the auto sweep and Schmitt circuits. When Q116 turns off, the Miller integrator starts to charge at the speed which time-base C and R determine. SWEEP VARIABLE VR103 permits to vary sweep speed. The sweep stop circuit of Q113, 114 detects the output voltage of the Miller integrator and controls a gate to invert state and stop sweep. The holdoff circuit Q119 determines when to stop sweep.
The sawtooth wave output of the Miller integrator is, with sweep speed controlled by VR104, sent to the horizontal output amplifier.
VR111 and TC101 permit sweep time adjustment respectively of 10 msec/div and 50 μsec/div ranges. VR106, 107 permit adjustment respectively of gain and center during $\times$ 10MAG mode. VR105 adjusts X-axis gain during X-Y mode.

CRT CIRCUIT

U104a ANDs the $\overline{Q}$ output of sweep control gate U102b with the CHOP blanking signal of U104c, d to generate the blanking signal.
Its amplitude is controlled in Q128, 129 by voltage coming from the INTENSITY control before the signal is sent to the blanking amplifier of Q1, 2. After amplified in the blanking amplifier and high acceleration DC component regenerated by D4 - 7, the blanking signal applies to a grid of the CRT.
High voltages of 6 kV (for CS-1012, 2 kV) needed for trace in the CRT are generated by the DC - DC converter comprising T1 and Q3. Operational amplifier U1b performs

CIRCUIT DESCRIPTION / BLOCK DIAGRAM

feedback to obtain high stability.

POWER SUPPLY

The regulated power supply requires no adjustment. +5, −15, and +15 V are generated by 3-terminal regulators. +100 and +140 V are stabilazed against line voltage fluctuation by feedback applied by an operational amplifier.

CALIBRATION VOLTAGE

No adjustment is needed for the calibration voltage. An oscillator composed of operational amplifier U1 generates a stable signal.

VERTICAL FINAL AMPLIFIER (applied for CS-1021 only)

The output amplifier is a cascode amplifier and comprised Q15, 16 (V. AMP. X73-1490) and Q1, 2 (V. FINAL X73-1630). The buffer amplifier is comprised with Q3~6. This output amplifier is provided with VR4 permitting crt center adjustment, VR3 permitting operating level adjustment, VR5 permitting gain adjustment and VR6 plus TC1, 2 permitting square wave and frequency response adjustment.

CS-1021 (1022, 1012) BLOCK DIAGRAM

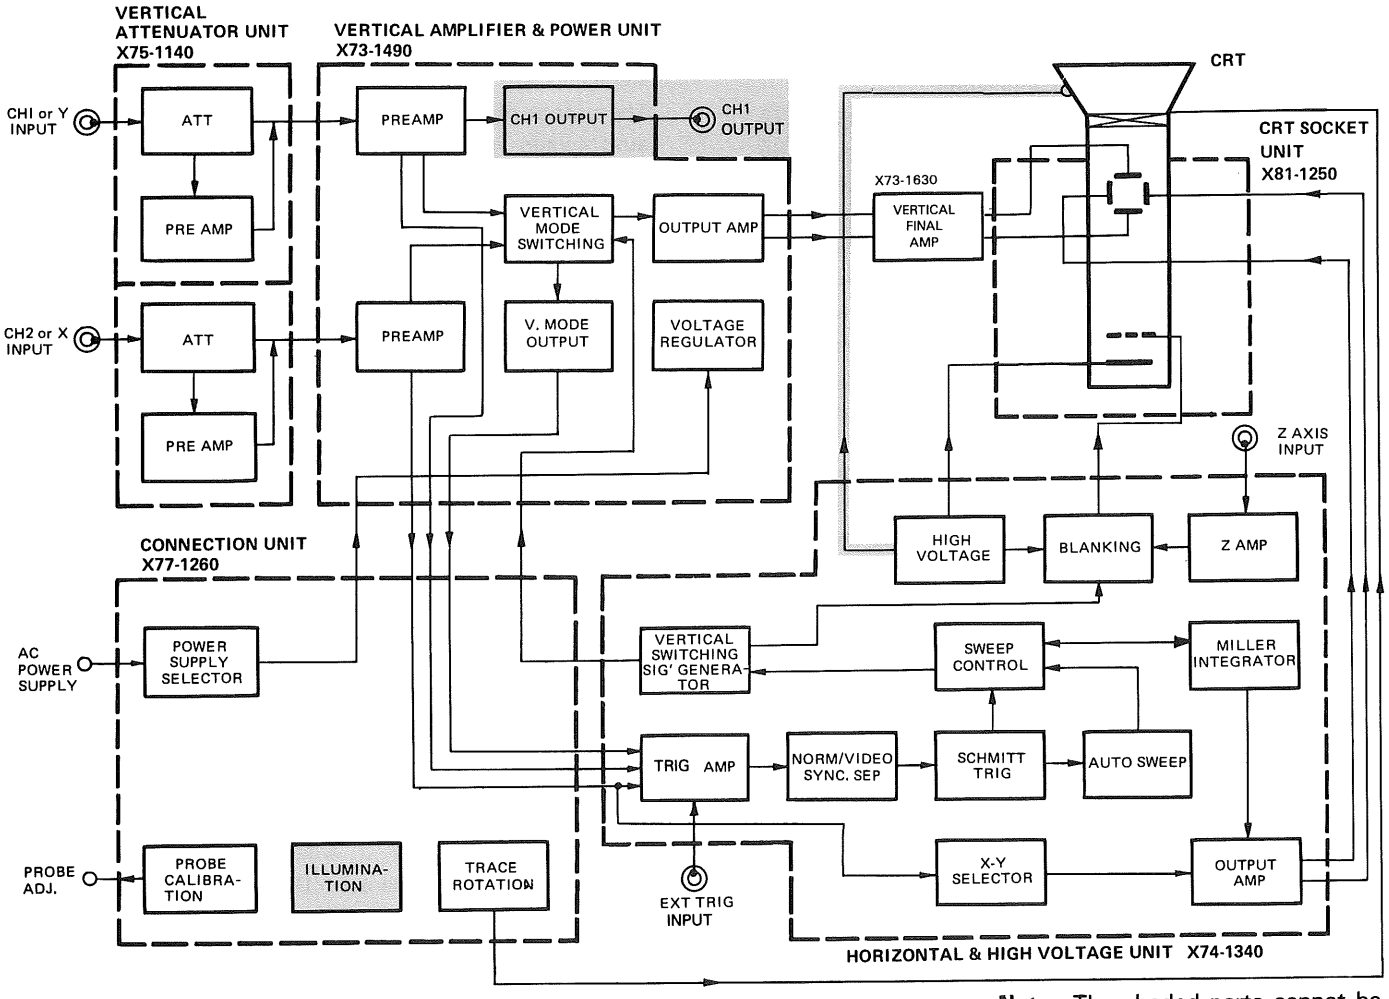


Fig. 5

Note: The shaded parts cannot be applied to CS-1021.

CIRCUIT DESCRIPTION CS-1020, CS-1010

VERTICAL ATTENUATOR

The vertical input signal coming to the BNC input receptacle enters a first- stage attenuator with path selected with the AG-GND-DC switch.

It then comes to one of the 1:1, 1:10, 1:100 attenuators which the vertical rotary switch selects before it enters the attenuator of the second stage. This attenuator consists of U1 and U2 and provides an attenuation sequence of 1-2-5.

For the ranges of 1, 2, and 5 mV/div, an amplifier consists of U3 and Q2 - 4 is used.

For the adjustment of step ATT balance, VR2 is used in the ranges of 10 mV/div or more. For the ranges of 1, 2, 5 mV/div, VR3 adjusts coarsely and VR 4 does finely. VR2 and VR4 are accessible from the outside.

Trimmer TC 5 adjusts frequency response of the amplifier operating for ranges of 1, 2, and 5 mV/div. It should be adjusted to obtain square wave and frequency response of the 10 mV/div range also in the other three ranges.

VERTICAL AMPLIFIER

The signal which has passed the attenuators comes to a preamplifier consisting of U1 and Q2 - 4.

Variable resistor VR1 provided for the preamplifier allows to vary vertical position.

The preamplifier output comes to not only the vertical mode selector but in CH1, the VERT OUTPUT circuit consiting of Q6 - 8 from which it is sent to the outside via a 22 μF capacitor for AC coupling. Another component of the preamplifier output comes to the base of Q5 and after being selected with the TRIG SOURCE switch, passes through the emitter follower Q5 over to a trigger amplifier which generates a trigger signal from the input.

The second stage amplifier is a cascode amplifier comprising Q9 - 12 whose switched to differential signal and it is fed to emitter follower of Q13 and 14.

The cascode amplifier is provided with trimmer capacitor TC101 permitting adjustment of square wave and frequency response at high frequencies.

The signal from Q13 and 14 is fed to vertical output amplifier.

The output amplifier is a cascode amplifier comprising Q15 - 18 and provided with VR4 permitting CRT center adjustment, VR3 permitting operating level adjustment, VR5 permitting gain adjustment, and VR6 plus TC1, 2 permitting square wave and frequency response adjustment.

TRIGGER AND SWEEP CIRCUITS

The trigger signal coming from the vertical amplifier enters the trigger amplifier of Q101 - 104 with path selected by the TRIG SOURCE switch. During X-Y mode, the signal applied to EXT TRIG input is X-signal which passes sweep X-Y selector consisting of S106, Q117, 130 and 131 and then applies to horizontal output amplifier comprising Q118 and Q120 - 127.

VR103a of X-Y selector adjusts X-axis gain coarsely and VR110 adjusts X-axis DC balance.

During sweep mode, the sync signal entering the sync amplifier divides into AC and VIDEO signals. The VIDEO signal passes the video-sync signal separator which separated vertical and horizontal sync signals from the video signal. Then it comes to the TRIG COUPLING switch and appears, after shaped by a Schmitt circuit, as the clock signal of sweep control gate U102b.

The auto-sweep circuit comprising U101a, b, d and U103a checks for the presence of the output of U101c and performs free-run operation if the signal is absent and mode is AUTO.

The output of the sweep control gate is controlled by the auto sweep and Schmitt circuits. When Q116 turns off, the Miller integrator starts to charge at the speed which time-base C and R determine. SWEEP VARIABLE VR103b permits to vary sweep speed. The sweep stop circuit of Q113, 114 detects the output voltage of the Miller integrator and controls a gate to invert state and stop sweep. The holdoff circuit Q119 determines when to stop sweep. The sawtooth wave output of the Miller integrator is, with sweep speed controlled by VR104, sent to the horizontal output amplifier.

VR111 and TC101 permit sweep time adjustment respectively of 10 msec/div and 50 μsec/div ranges. VR106, 107 permit adjustment respectively of gain and center during $\times$10MAG mode. VR105 adjusts X-axis gain during X-Y mode.

CRT CIRCUIT

Q output of sweep control gate U102b generates the blanking signal.

Its amplitude is controlled in Q128, 129 by voltage coming from the INTENSITY control before the signal is sent to the blanking amplifier of Q1, 2.

After amplified in the blanking amplifier and high acceleration DC component of regenerated by D4 - 7, the blanking signal applies to a grid of the CRT. High voltages of 6 kV (for CS-1010, 2 kV) needed for trace in the CRT are generated by the DC-DC converter comprising T1 and Q 3. Operational amplifier U1b performs feedback to obtain high stability.

POWER SUPPLY

The regulated power supply requires no adjustment.

+5, −15, and +15 V are generated by 3-terminal regulators. +100 and +140 V are stabilazed against line voltage fluctuation by feedback applied by an operational amplifier.

CALIBRATION VOLTAGE

No adjustment is needed for the calibration voltage.

An oscillator composed of operational amplifier U1 generates a stable signal.

BLOCK DIAGRAM

CS-1020 (1010) BLOCK DIAGRAM

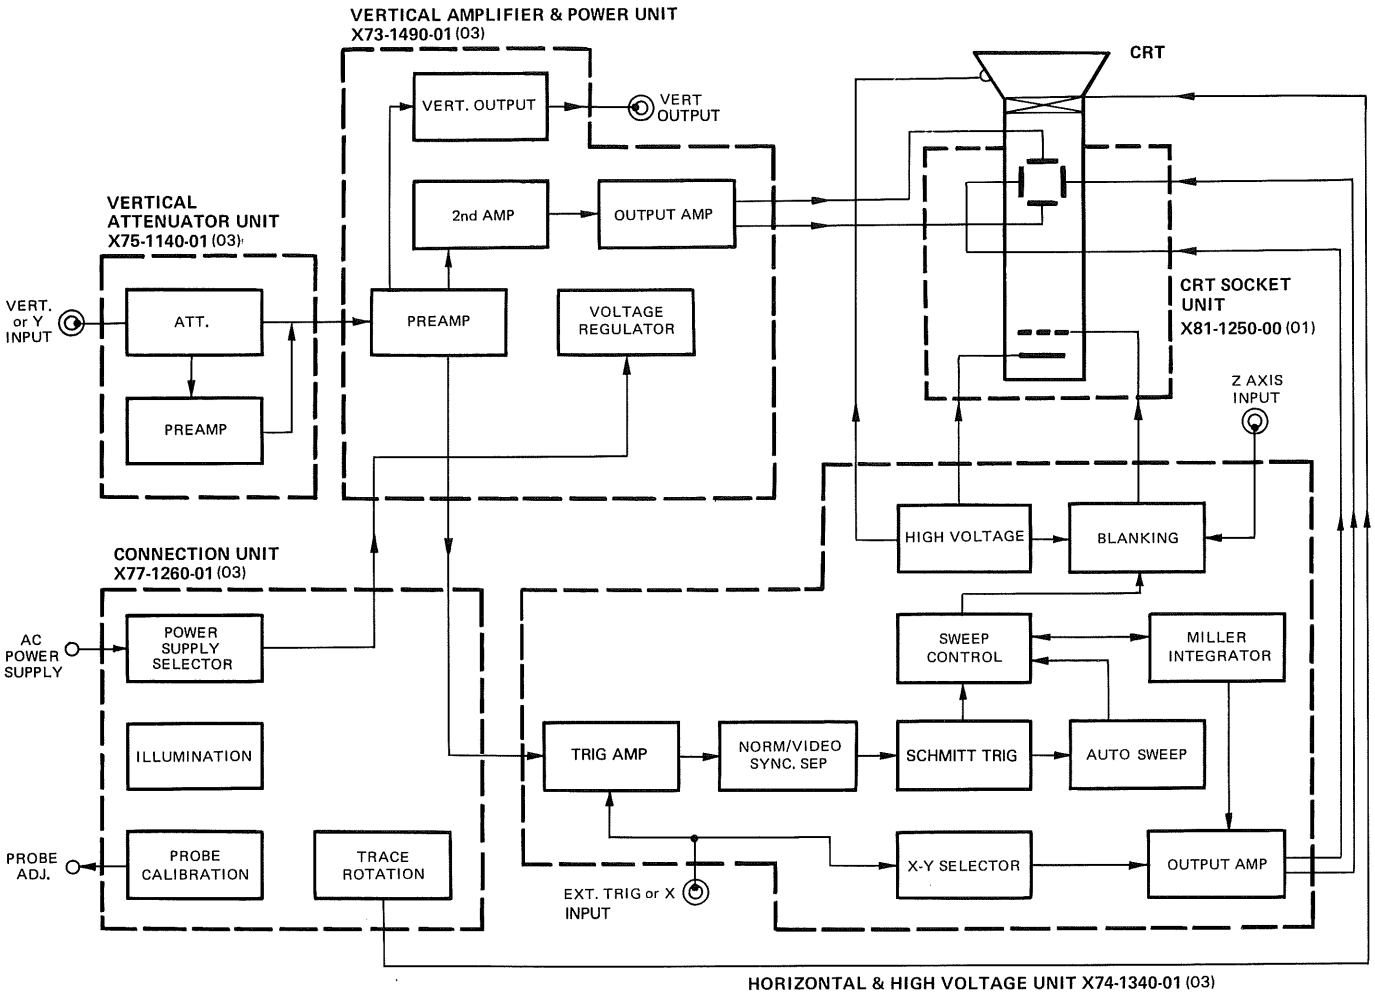


Fig. 6

ADJUSTMENT

To obtain the best performance, periodically calibrate the unit. Sometimes, only one mode need be calibrated, while at other times, all modes should be calibrated. When one mode is calibrated, it must be noted that the other modes may be affected. When calibrating all modes, perform the calibration in the specified sequence.
The following calibration required an accurate measuring instrument and an insulated adjusting flat blade screwdriver. If they are not available, contact your dealer.
For optimum adjustment, turn the power on and warm up the this equipment sufficiently (more than 30 minutes) before starting.
Before calibrating the unit, check the power supply voltage.

TEST EQUIPMENT REQUIRED

The following instrument or their equivalent should be used for making adjustment.

Test Equipment	Model	Minimum Specification
Digital Multi-Meter	DL-706 (TRIO)	Impedance: More than 10 MΩ, Measuring range: 0.01 V to 199 V
Sine-Wave Generator	651 B (YHP)	Frequency: 10 Hz to 10 MHz, constant voltage over tuning range
Sine-Wave Generator	SG-503 (Tektronix)	Frequency: 50 kHz to 100 MHz, Output impedance: 50 Ω, constant voltage over tuning range.
Square-Wave Generator	PG-506 (Tektronix)	Output signal: 1 kHz, Amplitude: 10 mVp-p to 10 Vp-p, Accuracy: within ±1%, Rise time: 35ns or less 100 kHz, Rise time: 1 ns or less
Q Meter	4343B (YHP)	—
Color Pattern Generator	CG-911A (TRIO)	—
Oscilloscope	CS-2100A (TRIO)	Sensitivity: more than 5 mV Frequency response: More than 100 MHz
Time-Marker Generator	TG-501 (Tektronix)	Time mark: 0.5 s to 0.1μs repetive waveform
High-Voltage Probe	—	Input Impedance: 1000 MΩ
Termination	—	Impedance: 50 Ω Accuracy: within 3%
Termination	—	3 watts type impedance: 50 Ω
Attenuator	—	−20 dB attenuation (50 Ω)

PREPARATION FOR ADJUSTMENT

Control Setting

The control setting listed below must be used for each adjustment procedure.
Exceptions to these settings will be noted as they occur.
After completing a adjustment, return the controls to the following settings.

NAME OF KNOBS	POSITION
INTENSITY	3 o'clock
FOCUS	Optimum position
CH1, CH2 POSITION	Mechanical center
◄► H. POSITION/PULL ×10MAG	Mechanical center, push
VARIABLE (SWEEP TIME/DIV, VOLTS/DIV)	CAL
AC-GND-DC (CH1 and CH2)	DC (GND at no signal)
MODE	CH1
CH2 POLARITY	NORM
COUPLING	AC
SOURCE	V.MODE
TRIG. LEVEL	Mechanical center, push
TRIG. MODE	AUTO
VOLTS/DIV	10 mV/DIV
SWEEP TIME/DIV	0.2 ms/DIV

ADJUSTMENT


Item	Control setting	Test equ.	Adjustment control				P.C.B	Procedure
			1021 1022	1012	1020	1010		
POWER SUPPLY SECTION ADJ.								
ASTIG, FOCUS	TRIG MODE; X-Y	—	ASTIG, FOCUS					For the sharpest and roundest spot.
INTENSITY	AC-GND-DC; GND TRIG MODE; X-Y	—	VR1				X74	Spot disappears in 9 to 10 o'clock position.
TRACE ROTATION	AC-GND-DC; GND	—	TRACE ROTATION VR					Trace is in parallel with horizontal graduation line.
CRT CENTER		DL-706	VR4				X73	Short the short terminal (P2). Trace should be in the CRT center.
58 V ADJ.		DL-706	VR3	—	VR3	—	X73	Short the short terminal (P2). The voltage of +Y (−Y) should be 58 V±0.5 V.
63 V ADJ.		DL-706	—	VR3	—	VR3	X73	Short the short terminal (P2). The voltage of +Y (−Y) should be 63 V±0.3 V.
VERTICAL AMPLIFIER SECTION ADJ.								
CH1 DC BAL	VOLTS/DIV; 10 mV AC-GND-DC; GND		VR2	VR2	VR2	VR2	X75	Trace does not move vertically when rotating CH1 variable control.
			VR1	VR1	—	VR1	X75	
CH2 DC BAL	VOLTS/DIV; 10 mV AC-GND-DC; GND		VR2	VR2	—	—	X75	Trace does not move vertically when rotating CH2 variable control.
			VR1	VR1	—	—	X75	
CH1 ATT BAL	VOLTS/DIV; 1 mV AC-GND-DC; GND		VR3	VR3	VR3	VR3	X75	Trace does not move vertically when rotating CH1 variable control.
			VR4	VR4	VR4	VR4	X75	
CH2 ATT BAL	VOLTS/DIV; 1 mV AC-GND-DC; GND		VR3	VR3	—	—	X75	Trace does not move vertically when rotating CH2 variable control.
			VR4	VR4	—	—	X75	
CH2 INVERT	MODE; CH2 AC-GND-DC; GND		VR104	VR104	—	—	X73	Trace should be overlapped in the center of the graduation.
CH2 GAIN	MODE; CH2 VOLTS/DIV; 10 mV		VR5	VR5	VR5 (CH1 GAIN)	VR5 (CH1 GAIN)	X73	When applying a 1 kHz, 50 mVp-p square wave signal, vertical amplitude should be 5 div.
CH1 GAIN	MODE; CH1 VOLTS/DIV; 10 mV		VR103	VR103	—	—	X73	When applying a 1 kHz, 50 mVp-p square wave signal, vertical amplitude should be 5 div.
CH1 WAVESHAPE		PG-506	TC1	TC1	TC1	TC1	X75	Same as 10 mV range, a best flat top waveform should be obtained. TC1.....0.1 V TC3.....1 V
			TC3	TC3	TC3	TC3	X75	
CH2 WAVESHAPE		PG-506	TC1	TC1	—	—	X75	Same as 10 mV range, a best flat top waveform should be obtained. TC1.....0.1 V TC3.....1 V
			TC3	TC3	—	—	X75	
CH2 INPUT CAPACITY		4343B	TC2	TC2	—	—	X75	Input capacity should be 35pF ±3pF. TC2.....0.1 V TC4.....1 V
			TC4	TC4	—	—	X75	
CH1 INPUT CAPACITY		4343B	TC2	TC2	TC2	TC2	X75	Input capacity should be 35pF ±3pF. TC2.....0.1 V TC4.....1 V
			TC4	TC4	TC4	TC4	X75	

ADJUSTMENT


Item	Control setting	Test equ.	Adjustment control				P.C.B	Procedure
			1021 1022	1012	1020	1010		
CH1 OVERSHOOT	SWEEP TIME/DIV; 2 μs PULL×10MAG; PULL VOLTS/DIV; 10 mV	PG-506	TC101	TC101	TC101	TC101	X73	When applying a 100 kHz, square wave signal, vertical amplitude should be 6 div. Set TC101 at mechanical center and with VR6, for the sharpest waveform. TC1...mid range flat top waveform TC2...high range flat top waveform Set VOLTS/DIV to 5 mV for 6 div ± 3% vertical amplitude waveform. Overshoot should be ± 3%. TC5...best flat top waveform.
			VR6	VR6	VR6	VR6	X73	
			TC1	TC1	TC1	TC1	X73	
			TC2	TC2	TC2	TC2	X73	
			TC5	TC5	TC5	TC5	X75	
CH2 OVERSHOOT	SWEEP TIME/DIV; 2 μs	PG-506	TC102	TC102	—	—	X73	When applying a 100 kHz square wave signal for 6 div vertical amplitude, overshoot should be ± 3%.
HORIZONTAL HIGH VOLTAGE SECTION ADJ.								
1 ms SWEEP TIME	SWEEP TIME/DIV; 1 ms	TG-501	VR104	VR104	VR104	VR104	X74	Pulse should be on each division on the graduation line.
MAG GAIN	SWEEP TIME/DIV; 1 ms PULL×10MAG; PULL	TG501	VR106	VR106	VR106	VR106	X74	Interval of pulses should be 10 div when applying a 1 ms time marker signal.
MAG CENTER	SWEEP TIME/DIV; 1 ms PULL×10MAG; PUSH	TG-501	VR107	VR107	VR107	VR107	X74	The center of pulse should be center of the graduation scale when applying a 5 ms marker signal. H.POSITION...mechanical center.
10 ms SWEEP TIME	SWEEP TIME/DIV; 10 ms	TG-501	VR111	VR111	VR111	VR111	X74	11th pulse should correspond to the right end of the graduation line.
20 μs SWEEP TIME	SWEEP TIME/DIV; 20 μs	TG-501	TC101	TC101	TC101	TC101	X74	11th pulse should correspond to the right end of the graduation line.
X POSITION	TRIG MODE; X-Y⇒AUTO AC-GND-DC; GND		VR102	VR102	—	—	X73	(1) Adjust the trace for center graduation line. (2) Spot should be the center of the screen.
X GAIN	TRIG MODE; X-Y VOLTS/DIV; 10 mV (CH2)	PG-506	VR105	VR105	VR105	VR105	X74	When applying a 1 kHz, 50 mV square wave signal, horizontal amplitude should be 5 div.

ADJUSTMENT


VERTICAL ATTENUATOR UNIT (X75-1140)

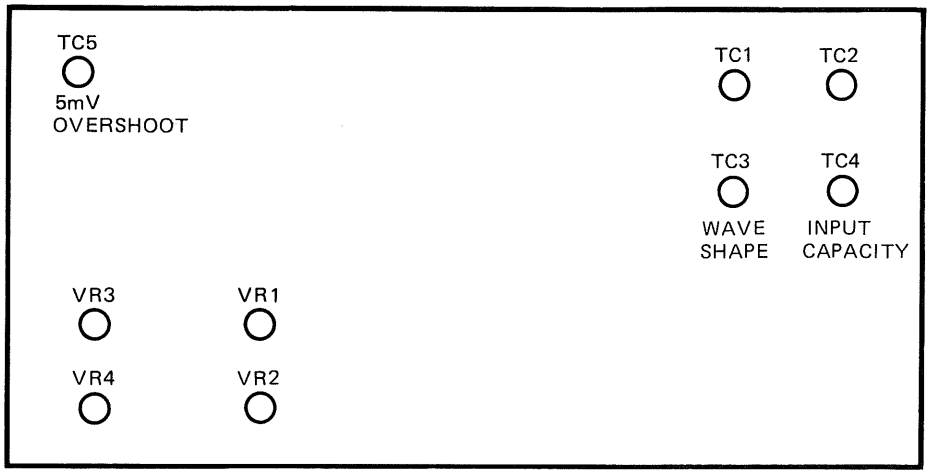

V. FINAL AMP UNIT (X73-1630)

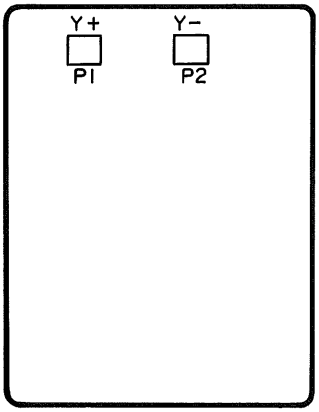

HORIZONTAL & HIGH VOLTAGE UNIT (X74-1340)

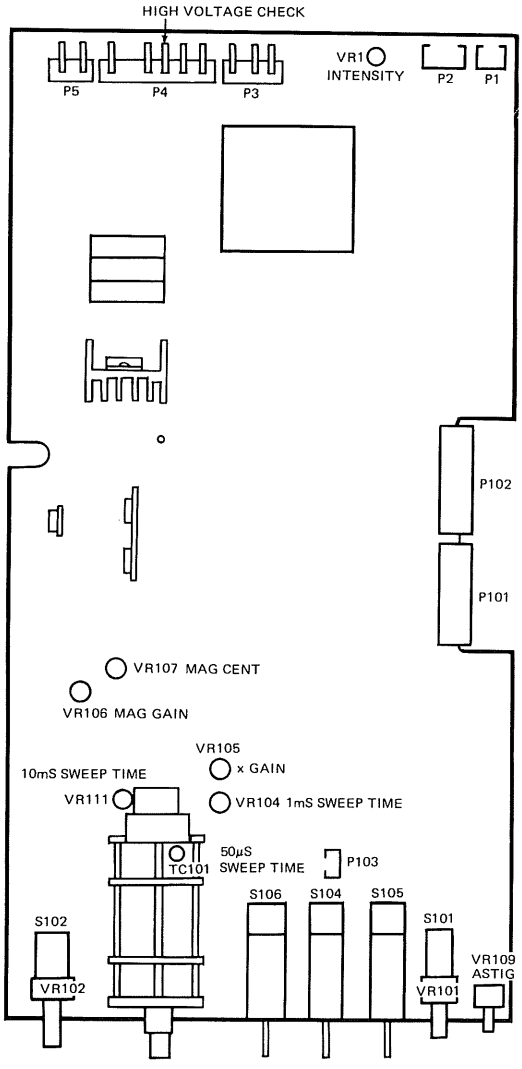

VERTICAL AMPLIFIER & POWER UNIT (X73-1490)

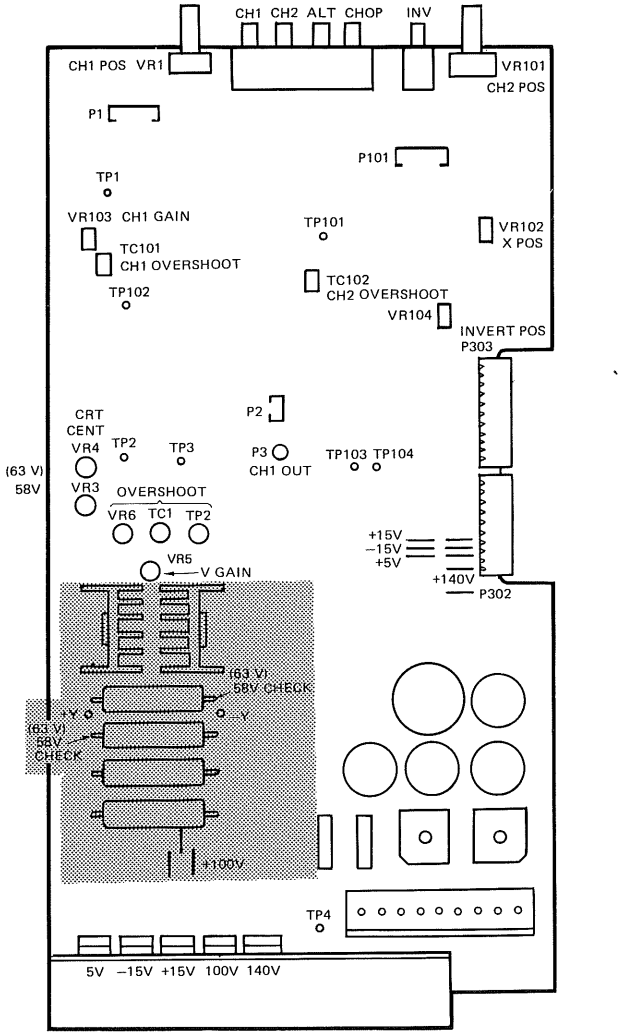
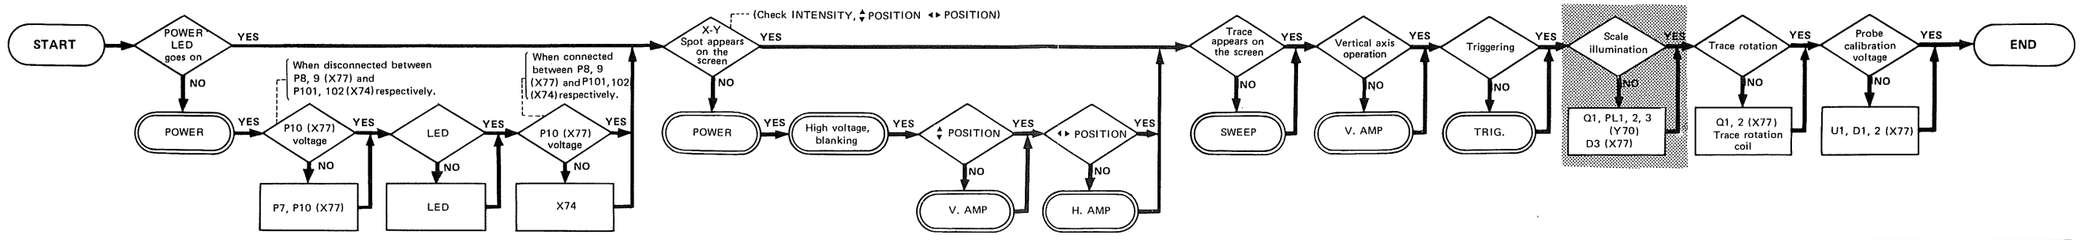
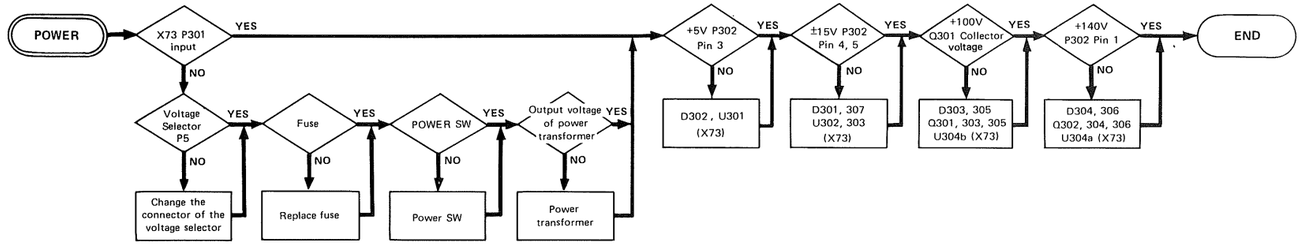
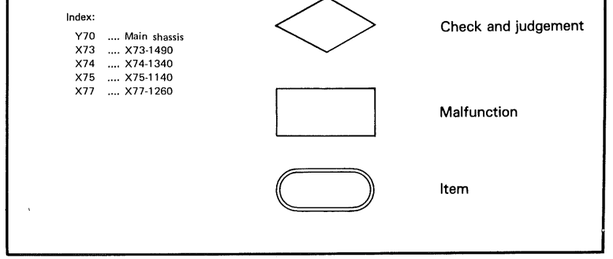


Fig. 7 Location of adjustment control

TROUBLESHOOTING








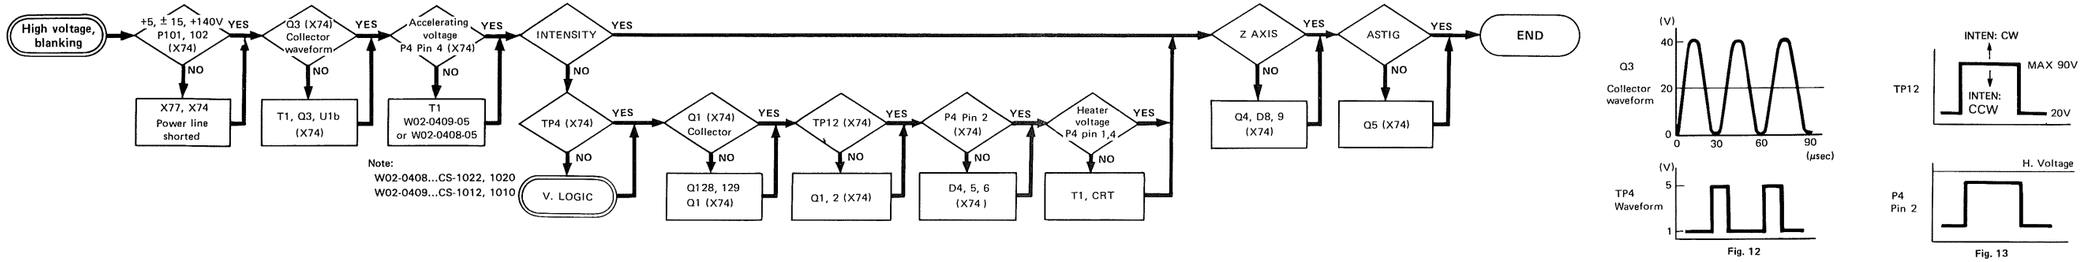


Fig. 12

Fig. 13

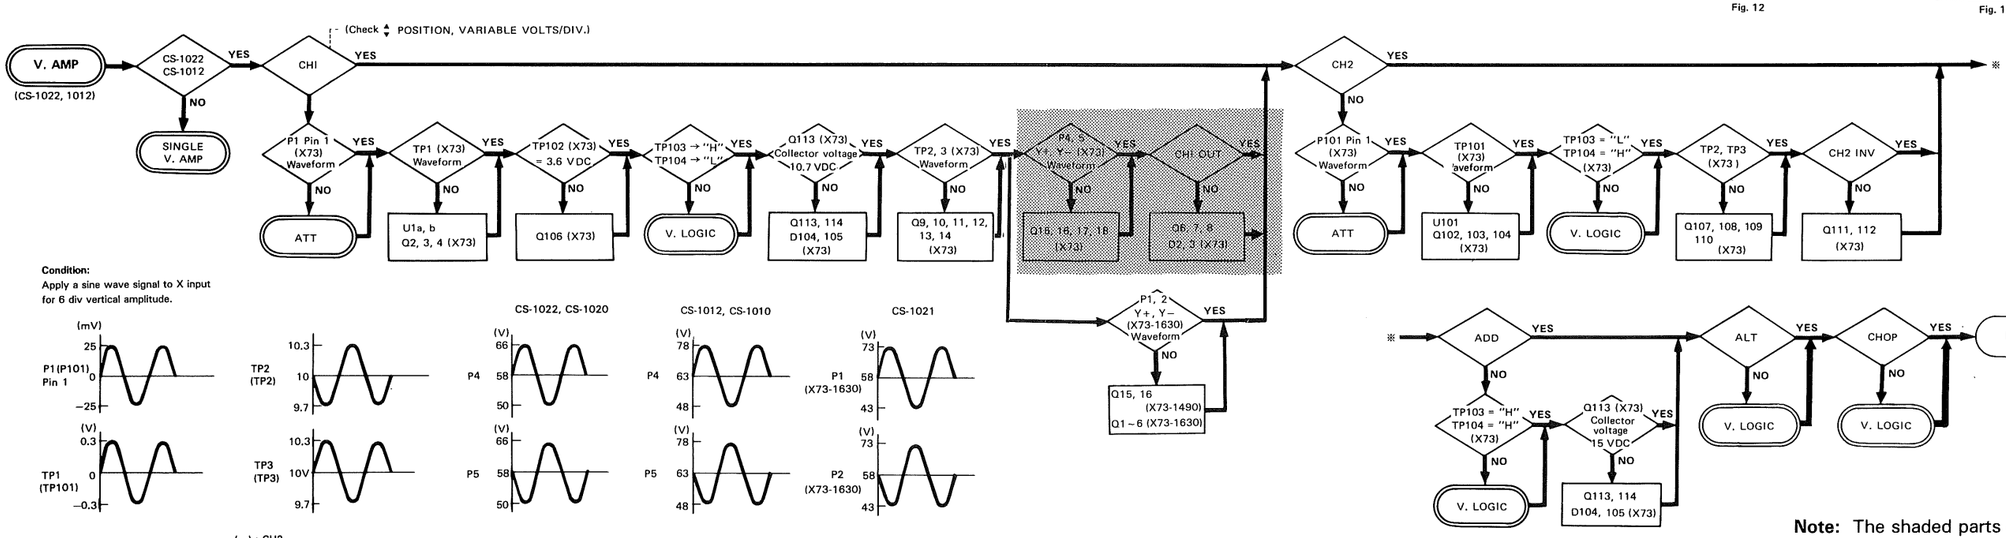


Condition:
Apply a sine wave signal to X input for 6 div vertical amplitude.


( ) : CH2

Note: The shaded parts cannot be applied to CS-1021.


TROUBLESHOOTING

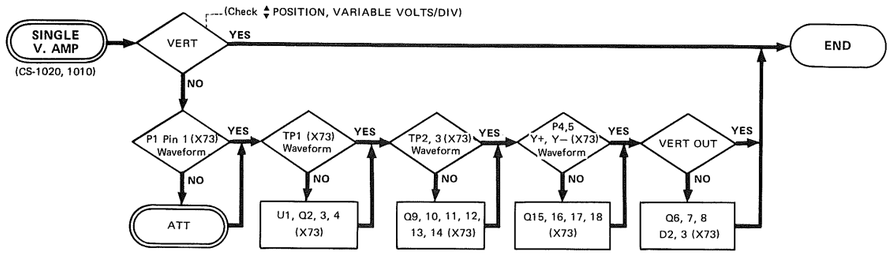


Note:
Waveforms of P1, Pin 1, TP1, TP2 and TP3, are same as CH1 V. AMP.

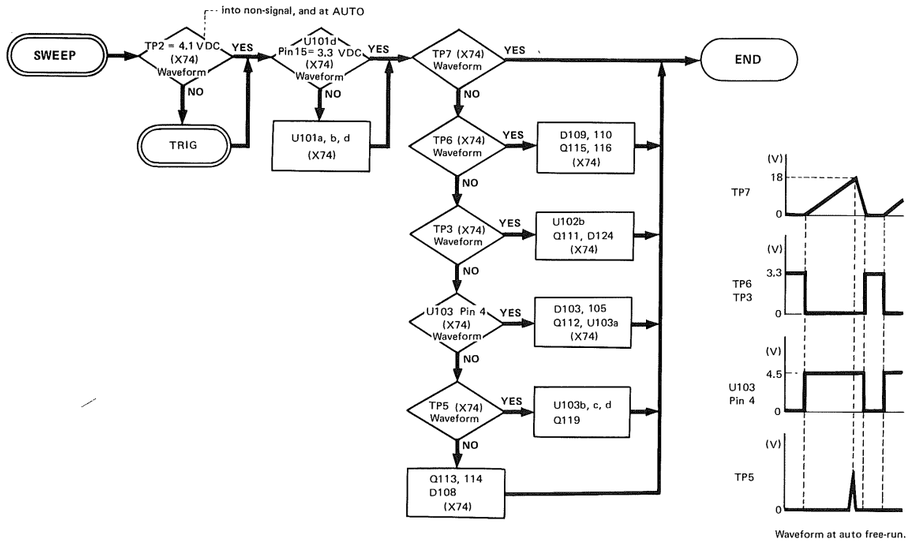

Waveform at auto free-run.

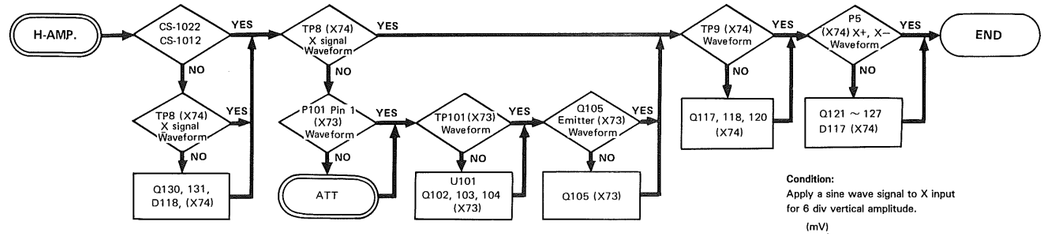


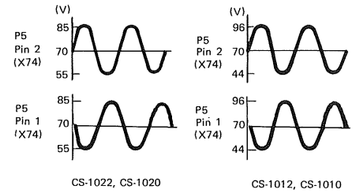



CS-1022, CS-1020

CS-1012, CS-1010


Condition:
Apply a sine wave signal to X input for 6 div vertical amplitude.



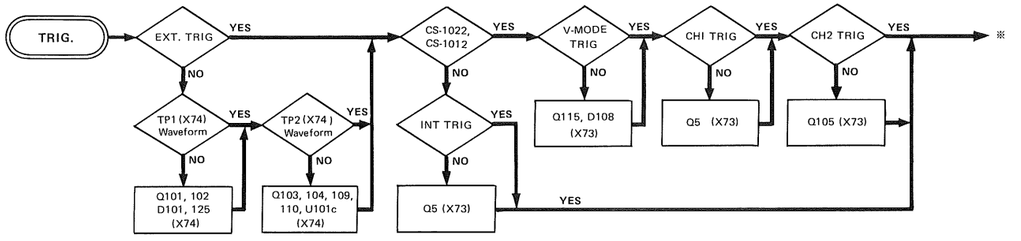




Waveform which synchronized at the center of the signal when applied a sine wave signal for 6 div.

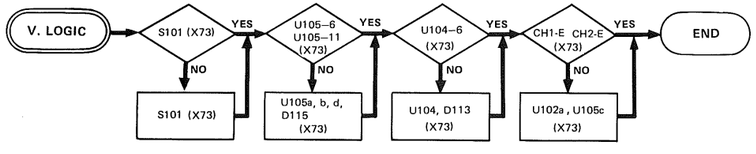

Note: Check the signal reffer to table right.

TEST POINT / MODE	P303 (X73) ⑩ CH1	P303 (X73) ⑪ CH2	P303 (X73) ⑨ ALT Chop	U105 (X74) Pin.6	U105 (X74) Pin.11	U104 Pin 8	U104 Pin 6	P102 (X74) CH1-E ①	P102 (X74) CH2-E ②
CH1	L	H	H	L	L	H		H	L
CH2	H	L	H	L	H	H		L	H
ADD	L	L	H	L	L	H		H	H
ALT	H	H	L	L	H	H		CH1 SWEEP	CH2 SWEEP
CHOP	H	H	H	H	H				
X-Y	–	–	–	L	L	H	H	H	L

SWEEP

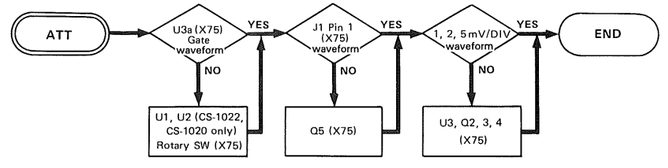

Note:
Waveforms of U3 gate and J1 Pin 1 are same as P1 Pin. 1 of CH1 V. AMP. (at 10 mV/div range)

PARTS LIST

MAIN CHASSIS

CS-1022 Y70-1400-21

REF.NO	PARTS NO	NAME & DESCRIPTION
1	A01-0897-12	CASE (TOP)
2	A01-0898-02	CASE (BOTTOM)
3	A10-1435-12	CHASSIS
4	A20-2761-02	PANEL (MOLDED)
5	A21-1026-12	DECORATIVE PANEL
6	A22-0826-02	SUB PANEL
7	A22-0827-13	SUB PANEL
8	A23-1642-02	REAR PANEL
9	A33-0502-05	REFLECTOR (FOR LAMP ASS'Y)
10	A33-0503-05	REFLECTOR (FOR LAMP ASS'Y)
11	B07-0712-13	ESCUTCHEON FOR FILTER
12	B19-0726-04	FILTER
13	B30-0903-15	LED LAMP (RED)
—	B30-0940-05	LAMP ASS'Y
14	B30-0941-05	LAMP
15	B39-0407-04	SPACER
—	B40-2765-04	NAME PLATE (SERIAL NO)
—	B41-0710-04	CAUTION LABEL (HIGH VOLTAGE)
—	B41-0747-13	CAUTION LABEL
—	B50-2998-00	INSTRUCTION MANUAL
16	E04-0251-05	BNC RECEPTACLE
17	E21-0657-04	TERMINAL (GND)
18	E21-0660-04	TERMINAL(CAL)
—	E23-0043-04	EARTH LUG
—	E23-0513-05	EARTH LUG
—	E23-0524-04	EARTH LUG
—	E23-0525-14	EARTH PLATE
19	E30-0545-05	POWER CORD (JIS)
—	E30-1851-05	POWER CORD ASS'Y (JIS)
—	E31-2371-05	LEAD WIRE WITH CONNECTOR
—	E31-2372-05	LEAD WIRE WITH CONNECTOR
—	E31-2373-15	LEAD WIRE WITH CONNECTOR
20	F05-5013-05	FUSE 0.5A
21	F05-8015-05	FUSE 0.8A
—	F11-0990-13	SHIELD CASE
22	F15-0733-04	BLIND PLATE
—	F20-0622-05	INSULATOR
23	G02-0607-04	SPRING FOR CRT
24	G13-0716-04	CUSHION
—	G16-0602-04	REFLECTOR SHEET(L)
—	G16-0603-04	REFLECTOR SHEET(R)
—	G16-0607-04	REFLECTOR SHEET
—	H01-2986-04	CARTON BOX
—	H10-2815-02	FOAMED STYRENE PAD
—	H10-2816-02	FOAMED STYRENE PAD
—	H20-1719-04	VINYL COVER
—	H25-0029-04	BAG
25	J02-0089-05	LEG
26	J02-0510-14	LEG
27	J10-0100-22	BEZEL
28	J13-0033-15	FUSE HOLDER
39	J19-1313-05	LEAD HOLDER
29	J19-1633-13	HORDER FOR CRT
30	J19-1634-04	HOLDER FOR LEAD
31	J19-1635-04	HOLDER FOR LED
32	J21-2573-04	HOLDER FOR LEG
33	J21-2970-23	BLACKET FOR CRT
34	J21-2972-04	PLATE FOR POWER CORD
—	J21-4512-04	BLACKET FOR CRT
35	J25-3000-05	P.C.BOARD (FOR LAMP ASS'Y)
36	J31-0603-04	COLLAR
37	J42-0083-05	BUSHING
—	J42-0523-04	BUSHING
38	J59-0403-05	NYLON RIVET
—	J61-0408-05	WIRE WRAPPING BAND
40	J61-0515-05	SUPPORT (I TYPE)
41	J61-0516-05	SUPPORT (T TYPE)
42	J61-0517-05	STADOFF CLIP
43	K01-0518-05	HANDLE
44	K21-0851-03	KNOB
45	K21-0853-13	KNOB
46	K21-0854-13	KNOB
47	K21-0855-14	KNOB
48	K21-0856-13	KNOB
49	K27-0526-04	KNOB FOR LEVER
50	K27-0528-04	KNOB FOR PUSH
51	L01-9344-15	POWER TRANSFORMER
52	L39-0518-05	ROTATOR COIL
	N08-0611-04	DRESSED SCREW
	N09-0715-04	SCREW, PAN HD M 4X31
	N09-0716-05	SCREW
	N09-0717-05	SCREW, TRUSS HD M 3X12
	N09-0720-05	SCREW, SEMS PAN HD
	N10-2070-46	NUT, HEX
	N15-1030-41	WASHER, FLAT FOR M3
	N15-1040-41	WASHER
	N19-0191-05	WASHER NONMETAL
	N30-3004-46	SCREW, PAN HD M 3X4
	N30-3006-46	SCREW, PAN HD M 3X6
	N88-3006-46	SCREW, FLAT HD TAP TITE
	N89-3006-41	SCREW, BINDING TAP TITE
53	R03-3502-15	V.R. 10K B
54	R05-3504-05	V.R. 10K B
55	R05-3505-05	V.R. 20K B
56	R05-8001-05	V.R. 3M B
57	W01-0503-04	CORD WRAP
58	X73-1490-00	VERTICAL,POWER SUPPLY UNIT
59	X74-1340-00	HORIZONTAL UNIT
60	X75-1140-00	VERTICAL ATTENUATOR UNIT
61	X77-1260-00	CONNECTION UNIT
62	X81-1250-00	C.R.T SOCKET UNIT
	Y87-1840-00	PROBE PC-20
63	150FTM31	CRT
	212-2014-05	TUBE (PLASTIC)
	212-3017-05	TUBE (PLASTIC)
Q001	2SD613(E)	TR. SI, NPN
R100	RD14BB2E331J	RES. CARBON 330 5% 1/4W

CS-1020 Y70-1410-21

REF.NO	PARTS NO	NAME & DESCRIPTION
	A01-0897-12	CASE (TOP)
	A01-0898-02	CASE (BOTTOM)
	A10-1435-02	CHASSIS
	A20-2761-02	PANEL
	A21-1027-12	DECORATIVE PANEL
	A22-0826-02	SUB PANEL
	A22-0827-13	SUB PANEL
	A23-1642-02	REAR PANEL
	A33-0502-05	REFLECTOR (FOR LAMP ASS'Y)
	A33-0503-05	REFLECTOR (FOR LAMP ASS'Y)
	B07-0712-13	ESCUTCHEON FOR FILTER
	B19-0726-04	FILTER
	B30-0903-15	LED LAMP (RED)
	B30-0940-05	LAMP ASS'Y
	B30-0941-05	LAMP
	B39-0407-04	SPACER
	B40-2765-04	NAME PLATE (SERIAL NO)
	B41-0710-04	CAUTION LABEL (HIGH VOLTAGE)
	B41-0748-13	CAUTION LABEL
	B50-2998-00	INSTRUCTION MANUAL
	E04-0251-05	BNC RECEPTACLE
	E21-0657-04	TERMINAL (GND)
	E21-0660-04	TERMINAL(CAL)
	E23-0043-04	EARTH LUG
	E23-0513-05	EARTH LUG
	E23-0524-04	EARTH LUG
	E23-0525-14	EARTH PLATE
	E30-0545-05	AC POWER CORD
	E30-1851-05	POWER CORD ASS'Y (JIS)
	E31-2371-05	LEAD WIRE WITH CONNECTOR
	E31-2372-05	LEAD WIRE WITH CONNECTOR
	E31-2373-15	LEAD WIRE WITH CONNECTOR
	F05-5013-05	FUSE 0.5A
	F05-8015-05	FUSE 0.8A
	F11-0981-03	SHIELD CASE FOR CRT
	F20-0622-05	INSULATOR
	G02-0607-04	SPRING FOR CRT
	G13-0716-04	CUSHION
	G16-0602-04	REFLECTOR SHEET(L)
	G16-0603-04	REFLECTOR SHEET(R)
	G16-0607-04	REFLECTOR SHEET
	H01-2987-04	CARTON BOX
	H10-2815-02	FOAMED STYRENE PAD
	H10-2816-02	FOAMED STYRENE PAD
	H20-1719-04	VINYL COVER
	H25-0029-04	BAG
	J02-0089-05	LEG
	J02-0510-14	LEG
	J10-0100-12	BEZEL
	J13-0033-15	FUSE HOLDER
	J19-1313-05	LEAD HOLDER
	J19-1633-03	HOLDER FOR CRT
	J19-1634-04	HOLDER FOR LEAD
	J19-1635-04	HOLDER FOR LED
	J21-2573-04	HOLDER FOR LEG
	J21-2970-13	BRACKET FOR CRT
	J21-2972-04	PLATE FOR POWER CORD
	J25-3000-05	P.C.BOARD (FOR LAMP ASS'Y)
	J31-0603-04	COLLAR
	J42-0083-05	BUSHING
	J59-0403-05	NYLON RIVET
	J61-0401-05	WIRE BAND
	J61-0515-05	SUPPORT (I TYPE)
	J61-0516-05	SUPPORT (T TYPE)
	J61-0517-05	STADOFF CLIP
	K01-0518-05	HANDLE
	K21-0851-03	KNOB
	K21-0853-03	KNOB
	K21-0854-03	KNOB
	K21-0855-14	KNOB
	K21-0856-03	KNOB
	K27-0526-04	KNOB FOR LEVER

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION
	L01-9344-15	POWER TRANSFORMER
	L39-0518-05	ROTATOR COIL
	N08-0611-04	DRESSED SCREW
	N09-0715-04	SCREW, PAN HD M 4X31
	N09-0716-05	SCREW
	N09-0717-05	SCREW, TRUSS HD M 3X12
	N09-0720-05	SCREW, SEMS PAN HD
	N10-2070-46	NUT, HEX
	N15-1030-41	WASHER, FLAT FOR M3
	N15-1040-41	WASHER
	N19-0191-05	WASHER NONMETAL
	N30-3004-46	SCREW, PAN HD M 3X4
	N30-3006-46	SCREW, PAN HD M 3X6
	N33-4012-41	SCREW M 4X12
	N88-3006-46	SCREW, FLAT HD TAP TITE
	N89-3006-41	SCREW, BINDING TAP TITE
	R03-3502-15	V.R. 10K B
	R05-3504-05	V.R. 10K B
	R05-3505-05	V.R. 20K B
	R05-8001-05	V.R. 3M B
	W01-0503-04	CORD WRAP
	X73-1490-01	VERTICAL,POWER SUPPLY UNIT
	X74-1340-01	HORIZONTAL UNIT
	X75-1140-01	VERTICAL ATTENUATOR UNIT
	X77-1260-01	CONNECTION UNIT
	X81-1250-00	C.R.T SOCKET UNIT
	Y87-1840-00	PROBE PC-20
	150FTM31	CRT
Q001	2SD613(E)	TR. SI, NPN
R100	RD14BB2E331J	RES. CARBON 330 5% 1/4W

CS-1012 Y70-1420-21

REF.NO	PARTS NO	NAME & DESCRIPTION
	A01-0897-12	CASE (TOP)
	A01-0898-02	CASE (BOTTOM)
	A10-1435-12	CHASSIS
	A20-2761-02	PANEL (MOLDED)
	A21-1028-12	DECORATIVE PANEL
	A22-0826-02	SUB PANEL
	A22-0827-13	SUB PANEL
	A23-1642-02	REAR PANEL
	A33-0502-05	REFLECTOR (FOR LAMP ASS'Y)
	A33-0503-05	REFLECTOR (FOR LAMP ASS'Y)
	B07-0712-13	ESCUTCHEON FOR FILTER
	B19-0726-04	FILTER
	B30-0903-15	LED LAMP (RED)
	B30-0940-05	LAMP ASS'Y
	B30-0941-05	LAMP
	B39-0407-04	SPACER
	B40-2765-04	NAME PLATE (SERIAL NO)
	B41-0749-13	CAUTION LABEL
	B50-2998-00	INSTRUCTION MANUAL
	E04-0251-05	BNC RECEPTACLE
	E21-0657-04	TERMINAL (GND)
	E21-0660-04	TERMINAL(CAL)
	E23-0043-04	EARTH LUG
	E23-0513-05	EARTH LUG
	E23-0524-04	EARTH LUG
	E23-0525-14	EARTH PLATE
	E30-0545-05	POWER CORD (JIS)
	E30-1851-05	POWER CORD ASS'Y (JIS)
	E31-2371-05	LEAD WIRE WITH CONNECTOR
	E31-2372-05	LEAD WIRE WITH CONNECTOR
	E31-2373-15	LEAD WIRE WITH CONNECTOR
	F05-5013-05	FUSE 0.5A
	F05-8015-05	FUSE 0.8A
	F10-1565-04	SHIELDING PLATE
	F11-0982-23	SHIELD CASE
	F15-0734-04	BLIND PLATE
	F20-0622-05	INSULATOR
	G02-0607-04	SPRING FOR CRT
	G13-0716-04	CUSHION
	G16-0602-04	REFLECTOR SHEET(L)
	G16-0603-04	REFLECTOR SHEET(R)
	G16-0607-04	REFLECTOR SHEET
	H01-2988-04	CARTON BOX
	H10-2815-02	FOAMED STYRENE PAD
	H10-2816-02	FOAMED STYRENE PAD
	H20-1719-04	VINYL COVER
	H25-0029-04	BAG
	J02-0089-05	LEG
	J02-0510-14	LEG
	J10-0100-22	BEZEL
	J13-0033-15	FUSE HOLDER
	J19-1313-05	LEAD HOLDER
	J19-1633-13	HORDER FOR CRT
	J19-1634-04	HOLDER FOR LEAD
	J19-1635-04	HOLDER FOR LED
	J21-2573-04	HOLDER FOR LEG
	J21-2970-23	BLACKET FOR CRT
	J21-2972-14	PLATE FOR POWER CORD
	J21-4512-04	BLACKET FOR CRT
	J25-3000-05	P.C.BOARD (FOR LAMP ASS'Y)
	J31-0603-04	COLLAR
	J42-0083-05	BUSHING
	J42-0524-04	BUSHING
	J59-0403-05	NYLON RIVET
	J61-0408-05	WIRE WRAPPING BAND
	J61-0515-05	SUPPORT (I TYPE)
	J61-0516-05	SUPPORT (T TYPE)
	J61-0517-05	STADOFF CLIP
	K01-0518-05	HANDLE
	K21-0851-03	KNOB
	K21-0853-13	KNOB
	K21-0854-13	KNOB
	K21-0855-14	KNOB
	K21-0856-13	KNOB
	K27-0526-04	KNOB FOR LEVER
	K27-0528-04	KNOB FOR PUSH
	L01-9344-15	POWER TRANSFORMER
	L39-0518-05	ROTATOR COIL
	N08-0611-04	DRESSED SCREW
	N09-0715-04	SCREW, PAN HD M 4X31
	N09-0716-05	SCREW
	N09-0717-05	SCREW, TRUSS HD M 3X12
	N09-0720-05	SCREW, SEMS PAN HD
	N10-2070-46	NUT, HEX
	N15-1030-41	WASHER, FLAT FOR M3
	N15-1040-41	WASHER
	N19-0191-05	WASHER NONMETAL
	N30-3004-46	SCREW, PAN HD M 3X4
	N30-3006-46	SCREW, PAN HD M 3X6
	N88-3006-46	SCREW, FLAT HD TAP TITE
	N89-3006-41	SCREW, BINDING TAP TITE
	R03-3502-15	V.R. 10K B
	R05-3504-05	V.R. 10K B
	R05-3505-05	V.R. 20K B
	R05-8001-05	V.R. 3M B
	W01-0503-04	CORD WRAP
	X73-1490-02	VERTICAL,POWER SUPPLY UNIT
	X74-1340-02	HORIZONTAL UNIT
	X75-1140-02	VERTICAL ATTENUATOR UNIT
	X77-1260-02	CONNECTION UNIT
	X81-1250-01	C.R.T SOCKET UNIT
	Y87-1840-00	PROBE PC-20
	150GTM31	CRT
	212-2014-05	TUBE (PLASTIC)
	212-3017-05	TUBE (PLASTIC)
Q001	2SD613(E)	TR. SI, NPN
R100	RD14BB2E431J	RES. CARBON 430 5% 1/4W

CS-1010 Y70-1430-21

REF.NO	PARTS NO	NAME & DESCRIPTION
	A01-0897-12	CASE (TOP)
	A01-0898-02	CASE (BOTTOM)
	A10-1435-12	CHASSIS
	A20-2761-02	PANEL (MOLDED)
	A21-1029-12	DECORATIVE PANEL
	A22-0826-02	SUB PANEL
	A22-0827-13	SUB PANEL
	A23-1642-02	REAR PANEL
	A33-0502-05	REFLECTOR (FOR LAMP ASS'Y)
	A33-0503-05	REFLECTOR (FOR LAMP ASS'Y)
	B07-0712-13	ESCUTCHEON FOR FILTER
	B19-0726-04	FILTER
	B30-0903-15	LED LAMP (RED)
	B30-0940-05	LAMP ASS'Y
	B30-0941-05	LAMP
	B39-0407-04	SPACER
	B40-2765-04	NAME PLATE (SERIAL NO)
	B41-0750-13	CAUTION LABEL
	B50-2998-00	INSTRUCTION MANUAL
	E04-0251-05	BNC RECEPTACLE
	E21-0657-04	TERMINAL (GND)
	E21-0660-04	TERMINAL(CAL)
	E23-0043-04	EARTH LUG
	E23-0513-05	EARTH LUG
	E23-0524-04	EARTH LUG
	E23-0525-14	EARTH PLATE
	E30-0545-05	POWER CORD (JIS)
	E30-1851-05	POWER CORD ASS'Y (JIS)
	E31-2371-05	LEAD WIRE WITH CONNECTOR
	E31-2372-05	LEAD WIRE WITH CONNECTOR
	E31-2373-15	LEAD WIRE WITH CONNECTOR
	F05-5013-05	FUSE 0.5A
	F05-8015-05	FUSE 0.8A
	F10-1565-04	SHIELDING PLATE
	F11-0982-23	SHIELD CASE
	F15-0734-04	BLIND PLATE
	F20-0622-05	INSULATOR

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION
	G02-0607-04	SPRING FOR CRT
	G13-0716-04	CUSHION
	G16-0602-04	REFLECTOR SHEET(L)
	G16-0603-04	REFLECTOR SHEET(R)
	G16-0607-04	REFLECTOR SHEET
	H01-2989-04	CARTON BOX
	H10-2815-02	FOAMED STYRENE PAD
	H10-2816-02	FOAMED STYRENE PAD
	H20-1719-04	VINYL COVER
	H25-0029-04	BAG
	J02-0089-05	LEG
	J02-0510-14	LEG
	J10-0100-22	BEZEL
	J13-0033-15	FUSE HOLDER
	J19-1313-05	LEAD HOLDER
	J19-1633-13	HORDER FOR CRT
	J19-1634-04	HOLDER FOR LEAD
	J19-1635-04	HOLDER FOR LED
	J21-2573-04	HOLDER FOR LEG
	J21-2970-23	BLACKET FOR CRT
	J21-2972-04	PLATE FOR POWER CORD
	J21-4512-04	BLACKET FOR CRT
	J25-3000-05	P.C.BOARD (FOR LAMP ASS'Y)
	J31-0603-04	COLLAR
	J42-0083-05	BUSHING
	J42-0524-04	BUSHING
	J59-0403-05	NYLON RIVET
	J61-0408-05	WIRE WRAPPING BAND
	J61-0515-05	SUPPORT (I TYPE)
	J61-0516-05	SUPPORT (T TYPE)
	J61-0517-05	STADOFF CLIP
	K01-0518-05	HANDLE
	K21-0851-03	KNOB
	K21-0853-13	KNOB
	K21-0854-13	KNOB
	K21-0855-14	KNOB
	K21-0856-13	KNOB
	K27-0526-04	KNOB FOR LEVER
	L01-9344-15	POWER TRANSFORMER
	L39-0518-05	ROTATOR COIL
	N08-0611-04	DRESSED SCREW
	N09-0715-04	SCREW, PAN HD M 4X31
	N09-0716-05	SCREW
	N09-0717-05	SCREW, TRUSS HD M 3X12
	N09-0720-05	SCREW, SEMS PAN HD
	N10-2070-46	NUT, HEX
	N15-1030-41	WASHER, FLAT FOR M3
	N15-1040-41	WASHER
	N19-0191-05	WASHER NONMETAL
	N30-3004-46	SCREW, PAN HD M 3X4
	N30-3006-46	SCREW, PAN HD M 3X6
	N88-3006-46	SCREW, FLAT HD TAP TITE
	N89-3006-41	SCREW, BINDING TAP TITE
	R03-3502-15	V.R. 10K B
	R05-3504-05	V.R. 10K B
	R05-3505-05	V.R. 20K B
	R05-8001-05	V.R. 3M B
	W01-0503-04	CORD WRAP
	X73-1490-03	VERTICAL,POWER SUPPLY UNIT
	X74-1340-03	HORIZONTAL UNIT
	X75-1140-03	VERTICAL ATTENUATOR UNIT
	X77-1260-03	CONNECTION UNIT
	X81-1250-01	C.R.T SOCKET UNIT
	Y87-1840-00	PROBE PC-20
	150GTM31	CRT
	212-2014-05	TUBE (PLASTIC)
	212-3017-05	TUBE (PLASTIC)
Q001	2SD613(E)	TR. SI, NPN
R100	RD14BB2E431J	RES. CARBON 430 5% 1/4W

VERTICAL ATTENUATOR UNIT

(X75-1140-00)

REF.NO	PARTS NO	NAME & DESCRIPTION
1	A22-0828-03	SUB PANEL
2	E04-0251-05	BNC RECEPTACLE
	E33-4038-00	WIRE ASSY
3	F10-1564-04	SHIELD PLATE
	F10-1566-04	SHIELD PLATE
	J25-2997-13	PCB (UNMOUNTED)
4	K21-0852-03	KNOB
5	K21-0855-14	KNOB
	N30-3006-46	SCREW, PAN HD M 3X6
	N89-3006-41	SCREW, BINDING TAP TITE
	R92-0150-05	JUMPING RES. ZERO OHM
	212-2014-05	TUBE (PLASTIC)
C001	C91-0501-05	CAP. METAL FILM 0.047 10% 630V
C002	CM93BD2A470J	CAP. MICA 47P 5% 100V
C003	CM93BD2A471J	CAP. MICA 470P 5% 100V
C004	C91-0502-05	CAP. METAL FILM 0.01 20% 630V
C005	CK45B1H103K	CAP. CERAMIC 0.01 10% 50V
C006	CC45CH1H0R5C	CAP. CERAMIC 0.5P 0.25P 50V
C009	CC45CH1H470J	CAP. CERAMIC 47P 5% 50V
C010	CK45B1H103K	CAP. CERAMIC 0.01 10% 50V
C011	CK45B1H103K	CAP. CERAMIC 0.01 10% 50V
C012	CK45B1H103K	CAP. CERAMIC 0.01 10% 50V
C013	CE04W1E470M	CAP. ELECTRO 47 20% 25V
C014	CE04W1E470M	CAP. ELECTRO 47 20% 25V
C015	CE04W1E470M	CAP. ELECTRO 47 20% 25V
C016	CE04W1E470M	CAP. ELECTRO 47 20% 25V
C017	CC45CH1H030C	CAP. CERAMIC 3P 0.25P 50V
C018	CC45CH1H010C	CAP. CERAMIC 1P 0.25P 50V
C019	CE04BW1H010M	CAP. ELECTRO 1 20% 50V
C020	CK45B1H152K	CAP. CERAMIC 1500P 10% 50V
C021	NO USE	
C022	CK45B1H103K	CAP. CERAMIC 0.01 10% 50V
C023	CK45B1H103K	CAP. CERAMIC 0.01 10% 50V
D001	MTZ9.1JC	DIODE, ZENER 9V
D002	MTZ9.1JC	DIODE, ZENER 9V
J001	E31-2367-15	LEAD WIRE WITH CONNECTOR
Q001	2SK30A(D)	FET. N-CHANNEL
Q002	2SA1005(K)	TR. SI, PNP
Q003	2SA1005(K)	TR. SI, PNP
Q004	2SC2786(K)	TR. SI, NPN
Q005	2SC2786(K)	TR. SI, NPN
R001	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R002	RD14BB2E105J	RES. CARBON 1M 5% 1/4W
R003	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R004	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R005	RN14BK2E9003F	RES. METAL FILM 900K 1% 1/4W
R006	RN14BK2E1113F	RES. METAL FILM 111K 1% 1/4W
R007	RD14BB2E820J	RES. CARBON 82 5% 1/4W
R008	RN14BK2E9903F	RES. METAL FILM 990K 1% 1/4W
R009	RN14BK2E1012F	RES. METAL FILM 10.1K 1% 1/4W
R010	RD14BB2E100J	RES. CARBON 10 5% 1/4W
R011	RN14BK2E1004F	RES. METAL FILM 1M 1% 1/4W
R012	RD14BB2E104J	RES. CARBON 100K 5% 1/4W
R013	RN14BK2E3900F	RES. METAL FILM 390 1% 1/4W
R014	RD14BB2E101J	RES. CARBON 100 5% 1/4W
R015	RN14BK2E3900F	RES. METAL FILM 390 1% 1/4W
R016	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R017	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R018	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R019	RD14BB2E271J	RES. CARBON 270 5% 1/4W
R020	NO USE	
R021	RD14BB2E124J	RES. CARBON 120K 5% 1/4W
R022	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R023	RD14BB2E562J	RES. CARBON 5.6K 5% 1/4W
R024	RD14BB2E562J	RES. CARBON 5.6K 5% 1/4W
R025	RD14BB2E392J	RES. CARBON 3.9K 5% 1/4W
R026	RD14BB2E753J	RES. CARBON 75K 5% 1/4W
R027	RD14BB2E754J	RES. CARBON 750K 5% 1/4W
R028	RD14BB2E122J	RES. CARBON 1.2K 5% 1/4W
R029	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R030	RD14BB2E332J	RES. CARBON 3.3K 5% 1/4W
R031	RD14BB2E332J	RES. CARBON 3.3K 5% 1/4W
R032	RD14BB2C561J	RES. CARBON 560 5% 1/6W
R033	RN14BK2E9100F	RES. METAL FILM 910 1% 1/4W
R034	RN14BK2E1000F	RES. METAL FILM 100 1% 1/4W
R035	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R036	RN14BK2E3000F	RES. METAL FILM 300 1% 1/4W
R037	RN14BK2E1800F	RES. METAL FILM 180 1% 1/4W
R038	RN14BK2E1200F	RES. METAL FILM 120 1% 1/4W
R039	RD14BB2E151J	RES. CARBON 150 5% 1/4W
R040	RD14BB2E560J	RES. CARBON 56 5% 1/4W
R041	RN14BK2E3000F	RES. METAL FILM 300 1% 1/4W
R042	RN14BK2E1800F	RES. METAL FILM 180 1% 1/4W
R043	RN14BK2E1200F	RES. METAL FILM 120 1% 1/4W
R044	RD14BB2E151J	RES. CARBON 150 5% 1/4W
R045	RD14BB2E560J	RES. CARBON 56 5% 1/4W
R046	RD14BB2E333J	RES. CARBON 33K 5% 1/4W
R047	RD14BB2E473J	RES. CARBON 47K 5% 1/4W
R048	RD14BB2E472J	RES. CARBON 4.7K 5% 1/4W
R049	RD14BB2C163J	RES. CARBON 16K 5% 1/6W
R050	RD14BB2C131J	RES. CARBON 130 5% 1/6W
R051	NO USE	
R052	RD14BB2C910J	RES. CARBON 91 5% 1/6W
R053	RD14BB2C111J	RES. CARBON 110 5% 1/6W
R054	RD14BB2E220J	RES. CARBON 22 5% 1/4W
S001	S32-4007-05	SLIDE SWITCH
S002	S02-3501-15	ROTARY SWITCH
TC001	C05-0427-05	CAP. TRIMMER 10P
TC002	C05-0428-05	CAP. TRIMMER 20P
TC003	C05-0427-05	CAP. TRIMMER 10P
TC004	C05-0428-05	CAP. TRIMMER 20P
TC005	C05-0427-05	CAP. TRIMMER 10P
U001	M47F(C)	FET, DUAL SI, N-CHANNEL
U002	2SA884	TR. SI, PNP
U003	M47F(B)	FET

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION
VR002	R12-3502-05	RES. SEMI FIXED 33K B
VR003	R12-3502-05	RES. SEMI FIXED 33K B
VR004	R12-3502-05	RES. SEMI FIXED 33K B
VR005	S02-3501-15	ROTARY SWITCH

VERTICAL ATTENUATOR UNIT

(X75-1140-01)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	A22-0828-03	SUB PANEL			
	E04-0251-05	BNC RECEPTACLE			
	E33-4038-00	WIRE ASSY			
	F10-1564-04	SHIELD PLATE			
	F10-1566-04	SHIELD PLATE			
	J25-2997-13	PCB (UNMOUNTED)			
	K21-0852-03	KNOB			
	K21-0855-14	KNOB			
	N30-3006-46	SCREW, PAN HD M 3X6			
	N89-3006-41	SCREW, BINDING TAP TITE			
	R92-0150-05	JUMPING RES. ZERO OHM			
C001	C91-0501-05	CAP. METAL FILM	0.047	10%	630V
C002	CM93BD2A470J	CAP. MICA	47P	5%	100V
C003	CM93BD2A471J	CAP. MICA	470P	5%	100V
C004	C91-0502-05	CAP. METAL FILM	0.01	20%	630V
C005	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C006	CC45CH1H0R5C	CAP. CERAMIC	0.5P	0.25P	50V
C009	CC45CH1H470J	CAP. CERAMIC	47P	5%	50V
C010	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C011	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C012	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C013	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C014	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C015	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C016	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C017	CC45CH1H030C	CAP. CERAMIC	3P	0.25P	50V
C018	CC45CH1H010C	CAP. CERAMIC	1P	0.25P	50V
C019	CE04BW1H010M	CAP. ELECTRO	1	20%	50V
C020	CK45B1H152K	CAP. CERAMIC	1500P	10%	50V
C021	NO USE				
C022	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C023	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
D001	WZ-090	DIODE			
D002	WZ-090	DIODE			
J001	E31-2367-15	LEAD WIRE WITH CONNECTOR			
Q001	2SK30A(O)	FET. N-CHANNEL			
Q002	2SA1005(K)	TR. SI, PNP			
Q003	2SA1005(K)	TR. SI, PNP			
Q004	2SC2786(K)	TR. SI, NPN			
Q005	2SC2786(K)	TR. SI, NPN			
R001	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R002	RD14BB2E105J	RES. CARBON	1M	5%	1/4W
R003	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R004	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R005	RN14BK2E9003F	RES. METAL FILM	900K	1%	1/4W
R006	RN14BK2E1113F	RES. METAL FILM	111K	1%	1/4W
R007	RD14BB2E820J	RES. CARBON	82	5%	1/4W
R008	RN14BK2E9903F	RES. METAL FILM	990K	1%	1/4W
R009	RN14BK2E1012F	RES. METAL FILM	10.1K	1%	1/4W
R010	RD14BB2E100J	RES. CARBON	10	5%	1/4W
R011	RN14BK2E1004F	RES. METAL FILM	1M	1%	1/4W
R012	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R013	RN14BK2E3900F	RES. METAL FILM	390	1%	1/4W
R014	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R015	RN14BK2E3900F	RES. METAL FILM	390	1%	1/4W
R016	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R017	RD14BB2C302J	RES. CARBON	3K	5%	1/6W
R018	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R019	RD14BB2E271J	RES. CARBON	270	5%	1/4W
R020	NO USE				
R021	RD14BB2E274J	RES. CARBON	270K	5%	1/4W
R022	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R023	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R024	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R025	RD14BB2E392J	RES. CARBON	3.9K	5%	1/4W
R026	RD14BB2E753J	RES. CARBON	75K	5%	1/4W
R027	RD14BB2E754J	RES. CARBON	750K	5%	1/4W
R028	RD14BB2E122J	RES. CARBON	1.2K	5%	1/4W
R029	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W
R030	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R031	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R032	RD14BB2C561J	RES. CARBON	560	5%	1/6W
R033	RN14BK2E9100F	RES. METAL FILM	910	1%	1/4W
R034	RN14BK2E1000F	RES. METAL FILM	100	1%	1/4W
R035	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R036	RN14BK2E3000F	RES. METAL FILM	300	1%	1/4W
R037	RN14BK2E1800F	RES. METAL FILM	180	1%	1/4W
R038	RN14BK2E1200F	RES. METAL FILM	120	1%	1/4W
R039	RD14BB2E151J	RES. CARBON	150	5%	1/4W
R040	RD14BB2E560J	RES. CARBON	56	5%	1/4W
R041	RN14BK2E3000F	RES. METAL FILM	300	1%	1/4W
R042	RN14BK2E1800F	RES. METAL FILM	180	1%	1/4W
R043	RN14BK2E1200F	RES. METAL FILM	120	1%	1/4W
R044	RD14BB2E151J	RES. CARBON	150	5%	1/4W
R045	RD14BB2E560J	RES. CARBON	56	5%	1/4W
R046	RD14BB2E333J	RES. CARBON	33K	5%	1/4W
R047	RD14BB2E473J	RES. CARBON	47K	5%	1/4W
R048	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R049	RD14BB2C163J	RES. CARBON	16K	5%	1/6W
R050	RD14BB2C131J	RES. CARBON	130	5%	1/6W
R051	NO USE				
R052	RD14BB2C910J	RES. CARBON	91	5%	1/6W
R053	RD14BB2C111J	RES. CARBON	110	5%	1/6W
S001	S32-4007-05	SLIDE SWITCH			
S002	S02-3501-15	ROTARY SWITCH			
TC001	C05-0427-05	CAP. TRIMMER	10P		
TC002	C05-0428-05	CAP. TRIMMER	20P		
TC003	C05-0427-05	CAP. TRIMMER	10P		
TC004	C05-0428-05	CAP. TRIMMER	20P		
TC005	C05-0427-05	CAP. TRIMMER	10P		
U001	M47F(C)	FET, DUAL SI, N-CHANNEL			
U002	2SA884	TR. SI, PNP			
U003	M47F(B)	FET			
VR002	R12-3502-05	RES. SEMI FIXED 33K B			
VR003	R12-3502-05	RES. SEMI FIXED 33K B			
VR004	R12-3502-05	RES. SEMI FIXED 33K B			

VERTICAL ATTENUATOR UNIT

(X75-1140-02)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	A22-0828-03	SUB PANEL			
	E04-0251-05	BNC RECEPTACLE			
	F10-1564-04	SHIELD PLATE			
	F10-1566-04	SHIELD PLATE			
	J25-2997-13	PCB (UNMOUNTED)			
	K21-0852-03	KNOB			
	K21-0855-14	KNOB			
	N30-3006-46	SCREW, PAN HD M 3X6			
	N89-3006-41	SCREW, BINDING TAP TITE			
	R92-0150-05	JUMPING RES. ZERO OHM			
C001	C91-0501-05	CAP. METAL FILM	0.047	10%	630V
C002	CM93BD2A470J	CAP. MICA	47P	5%	100V
C003	CM93BD2A471J	CAP. MICA	470P	5%	100V
C004	C91-0502-05	CAP. METAL FILM	0.01	20%	630V
C005	NO USE				
C006	CC45CH1H1R5C	CAP. CERAMIC	1.5P	0.25P	50V
C007	NO USE				
C008	CC45CH1H040C	CAP. CERAMIC	4P	0.25P	50V
C009	CC45CH1H680J	CAP. CERAMIC	68P	5%	50V
C010	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C011	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C012	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C013	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C014	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C015	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C016	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C017	CC45CH1H270J	CAP. CERAMIC	27P	5%	50V
C018	CC45CH1H020C	CAP. CERAMIC	2P	0.25P	50V
C024	CC45CH1H270J	CAP. CERAMIC	27P	5%	50V
D001	MTZ9.1JC	DIODE, ZENER	9V		
D002	MTZ9.1JC	DIODE, ZENER	9V		
J001	E31-2367-15	LEAD WIRE WITH CONNECTOR			
Q001	2SK30A(O)	FET. N-CHANNEL			
Q002	2SA1005(K)	TR. SI, PNP			
Q003	2SA1005(K)	TR. SI, PNP			
Q004	2SC2786(K)	TR. SI, NPN			
R001	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R002	RD14BB2E105J	RES. CARBON	1M	5%	1/4W
R003	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R004	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R005	RN14BK2E9003F	RES. METAL FILM	900K	1%	1/4W
R006	RN14BK2E1113F	RES. METAL FILM	111K	1%	1/4W
R007	RD14BB2E820J	RES. CARBON	82	5%	1/4W
R008	RN14BK2E9903F	RES. METAL FILM	990K	1%	1/4W
R009	RN14BK2E1012F	RES. METAL FILM	10.1K	1%	1/4W
R010	RD14BB2E100J	RES. CARBON	10	5%	1/4W
R011	RN14BK2E1004F	RES. METAL FILM	1M	1%	1/4W
R012	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R013	RN14BK2E27R0F	RES. METAL FILM	27.0	1%	1/4W
R014	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R015	RN14BK2E27R0F	RES. METAL FILM	27.0	1%	1/4W
R016	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R017	NO USE				
R018	RD14BB2C101J	RES. CARBON	100	5%	1/6W

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION			
R019	RD14BB2E121J	RES. CARBON	120	5%	1/4W
R020	RD14BB2E473J	RES. CARBON	47K	5%	1/4W
R021	RD14BB2E474J	RES. CARBON	470K	5%	1/4W
R022	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R023	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R024	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R025	RD14BB2E392J	RES. CARBON	3.9K	5%	1/4W
R026	RD14BB2E753J	RES. CARBON	75K	5%	1/4W
R027	RD14BB2E754J	RES. CARBON	750K	5%	1/4W
R028	RD14BB2E122J	RES. CARBON	1.2K	5%	1/4W
R029	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W
R030	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R031	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R032	NO USE				
R033	RN14BK2E9100F	RES. METAL FILM	910	1%	1/4W
R034	RN14BK2E1000F	RES. METAL FILM	100	1%	1/4W
R035	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R036	RN14BK2E3000F	RES. METAL FILM	300	1%	1/4W
R037	RN14BK2E1800F	RES. METAL FILM	180	1%	1/4W
R038	RN14BK2E1200F	RES. METAL FILM	120	1%	1/4W
R039	RD14BB2E151J	RES. CARBON	150	5%	1/4W
R040	RD14BB2E560J	RES. CARBON	56	5%	1/4W
R041	RN14BK2E3000F	RES. METAL FILM	300	1%	1/4W
R042	RN14BK2E1800F	RES. METAL FILM	180	1%	1/4W
R043	RN14BK2E1200F	RES. METAL FILM	120	1%	1/4W
R044	RD14BB2E161J	RES. CARBON	160	5%	1/4W
R045	RD14BB2E560J	RES. CARBON	56	5%	1/4W
R046	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R051	RD14BB2E361J	RES. CARBON	360	5%	1/4W
R052	RD14BB2C910J	RES. CARBON	91	5%	1/6W
R053	RD14BB2C111J	RES. CARBON	110	5%	1/6W
S001	S32-4007-05	SLIDE SWITCH			
S002	S02-3501-15	ROTARY SWITCH			
TC001	C05-0427-05	CAP. TRIMMER	10P		
TC002	C05-0428-05	CAP. TRIMMER	20P		
TC003	C05-0427-05	CAP. TRIMMER	10P		
TC004	C05-0428-05	CAP. TRIMMER	20P		
TC005	C05-0427-05	CAP. TRIMMER	10P		
U001	M47F(C)	FET, DUAL SI, N-CHANNEL			
U002	NO USE				
U003	M47F(B)	FET			
VR001	R12-3502-05	RES. SEMI FIXED	33K B		
VR002	R12-3502-05	RES. SEMI FIXED	33K B		
VR003	R12-3502-05	RES. SEMI FIXED	33K B		
VR004	R12-3502-05	RES. SEMI FIXED	33K B		
VR005	S02-3501-15	ROTARY SWITCH			

VERTICAL ATTENUATOR UNIT

(X75-1140-03)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	A22-0828-03	SUB PANEL			
	E04-0251-05	BNC RECEPTACLE			
	F10-1564-04	SHIELD PLATE			
	F10-1566-04	SHIELD PLATE			
	J25-2997-13	PCB (UNMOUNTED)			
	K21-0852-03	KNOB			
	K21-0855-14	KNOB			
	N30-3006-46	SCREW, PAN HD	M 3X6		
	N89-3006-41	SCREW, BINDING TAP TITE			
	R92-0150-05	JUMPING RES.	ZERO OHM		
C001	C91-0501-05	CAP. METAL FILM	0.047	10%	630V
C002	CM93BD2A470J	CAP. MICA	47P	5%	100V
C003	CM93BD2A471J	CAP. MICA	470P	5%	100V
C004	C91-0502-05	CAP. METAL FILM	0.01	20%	630V
C005	NO USE				
C006	CC45CH1H1R5C	CAP. CERAMIC	1.5P	0.25P	50V
C007	NO USE				
C008	CC45CH1H040C	CAP. CERAMIC	4P	0.25P	50V
C009	CC45CH1H680J	CAP. CERAMIC	68P	5%	50V
C010	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C011	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C012	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C013	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C014	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C015	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C016	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C017	CC45CH1H270J	CAP. CERAMIC	27P	5%	50V
C018	CC45CH1H020C	CAP. CERAMIC	2P	0.25P	50V
C024	CC45CH1H270J	CAP. CERAMIC	27P	5%	50V
D001	MTZ9.1JC	DIODE, ZENER	9V		
D002	MTZ9.1JC	DIODE, ZENER	9V		
J001	E31-2367-15	LEAD WIRE WITH CONNECTOR			
Q001	2SK30A(O)	FET. N-CHANNEL			
Q002	2SA1005(K)	TR. SI, PNP			
Q003	2SA1005(K)	TR. SI, PNP			
Q004	2SC2786(K)	TR. SI, NPN			
R001	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R002	RD14BB2E105J	RES. CARBON	1M	5%	1/4W
R003	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R004	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R005	RN14BK2E9003F	RES. METAL FILM	900K	1%	1/4W
R006	RN14BK2E1113F	RES. METAL FILM	111K	1%	1/4W
R007	RD14BB2E820J	RES. CARBON	82	5%	1/4W
R008	RN14BK2E9903F	RES. METAL FILM	990K	1%	1/4W
R009	RN14BK2E1012F	RES. METAL FILM	10.1K	1%	1/4W
R010	RD14BB2E100J	RES. CARBON	10	5%	1/4W
R011	RN14BK2E1004F	RES. METAL FILM	1M	1%	1/4W
R012	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R013	RN14BK2E27R0F	RES. METAL FILM	27.0	1%	1/4W
R014	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R015	RN14BK2E27R0F	RES. METAL FILM	27.0	1%	1/4W
R016	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R017	NO USE				
R018	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R019	RD14BB2E121J	RES. CARBON	120	5%	1/4W
R020	RD14BB2E473J	RES. CARBON	47K	5%	1/4W
R021	RD14BB2E474J	RES. CARBON	470K	5%	1/4W
R022	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R023	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R024	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R025	RD14BB2E392J	RES. CARBON	3.9K	5%	1/4W
R026	RD14BB2E753J	RES. CARBON	75K	5%	1/4W
R027	RD14BB2E754J	RES. CARBON	750K	5%	1/4W
R028	RD14BB2E122J	RES. CARBON	1.2K	5%	1/4W
R029	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W
R030	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R031	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R032	NO USE				
R033	RN14BK2E9100F	RES. METAL FILM	910	1%	1/4W
R034	RN14BK2E1000F	RES. METAL FILM	100	1%	1/4W
R035	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R036	RN14BK2E3000F	RES. METAL FILM	300	1%	1/4W
R037	RN14BK2E1800F	RES. METAL FILM	180	1%	1/4W
R038	RN14BK2E1200F	RES. METAL FILM	120	1%	1/4W
R039	RD14BB2E151J	RES. CARBON	150	5%	1/4W
R040	RD14BB2E560J	RES. CARBON	56	5%	1/4W
R041	RN14BK2E3000F	RES. METAL FILM	300	1%	1/4W
R042	RN14BK2E1800F	RES. METAL FILM	180	1%	1/4W
R043	RN14BK2E1200F	RES. METAL FILM	120	1%	1/4W
R044	RD14BB2E161J	RES. CARBON	160	5%	1/4W
R045	RD14BB2E560J	RES. CARBON	56	5%	1/4W
R046	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R051	RD14BB2E361J	RES. CARBON	360	5%	1/4W
R052	RD14BB2C910J	RES. CARBON	91	5%	1/6W
R053	RD14BB2C111J	RES. CARBON	110	5%	1/6W
S001	S32-4007-05	SLIDE SWITCH			
S002	S02-3501-15	ROTARY SWITCH			
TC001	C05-0427-05	CAP. TRIMMER	10P		
TC002	C05-0428-05	CAP. TRIMMER	20P		
TC003	C05-0427-05	CAP. TRIMMER	10P		
TC004	C05-0428-05	CAP. TRIMMER	20P		
TC005	C05-0427-05	CAP. TRIMMER	10P		
U001	M47F(C)	FET, DUAL SI, N-CHANNEL			
U002	NO USE				
U003	M47F(B)	FET			
VR001	R12-3502-05	RES. SEMI FIXED	33K B		
VR002	R12-3502-05	RES. SEMI FIXED	33K B		
VR003	R12-3502-05	RES. SEMI FIXED	33K B		
VR004	R12-3502-05	RES. SEMI FIXED	33K B		
VR005	S02-3501-15	ROTARY SWITCH			

VERTICAL AMP & POWER UNIT

(X73-1490-00)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	E23-0526-04	EARTH PLATE			
	E33-4031-00	WIRE ASSY			
	F01-0835-05	HEAT SINK			
	F01-0836-04	HEAT SINK			
	J25-2999-13	PCB (UNMOUNTED)			
	J61-0517-05	STADOFF CLIP			
	N19-0191-05	WASHER NONMETAL			
	N19-0702-04	WASHER			
	N30-3008-46	SCREW, PAN HD	M 3X8		
	R92-0150-05	JUMPING RES.	ZERO OHM		
	212-1018-05	TUBE (PLASTIC)			
	212-2014-05	TUBE (PLASTIC)			
C002	CC45CH1H1R5C	CAP. CERAMIC	1.5P	0.25P	50V
C006	CC45CH1H221J	CAP. CERAMIC	220P	5%	50V
C007	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION			
C008	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C009	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C010	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C011	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C012	NO USE				
C013	CC45CH1H470J	CAP. CERAMIC	47P	5%	50V
C014	CE04W1E220M	CAP. ELECTRO	22	20%	25V
C015	NO USE				
C016	CE04W1E220M	CAP. ELECTRO	22	20%	25V
C017	CE04BW1E220M	CAP. ELECTRO	22	20%	25V
C020	CC45CH1H1R5C	CAP. CERAMIC	1.5P	0.25P	50V
C102	CC45CH1H010C	CAP. CERAMIC	1P	0.25P	50V
C103	NO USE				
C104	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C105	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C106	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C107	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C108	NO USE				
C109	CC45CH1H470J	CAP. CERAMIC	47P	5%	50V
C110	CC45CH1H470J	CAP. CERAMIC	47P	5%	50V
C111	CE04BW1H010M	CAP. ELECTRO	1	20%	50V
C112	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C115	CC45CH1H020C	CAP. CERAMIC	2P	0.25P	50V
C301	CE04W1V222M	CAP. ELECTRO	2200	20%	35V
C302	CE04W1V222M	CAP. ELECTRO	2200	20%	35V
C303	CE04W1E222M	CAP. ELECTRO	2200	20%	25V
C304	C90-0910-05	CAP. ELECTRO	100	20%	200V
C305	CE04W2E470	CAP. ELECTRO	47		250V
C306	CE04W1A101M	CAP. ELECTRO	100	20%	10V
C307	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C308	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C309	CE04W2C100	CAP. ELECTRO	10		160V
C310	CE04W2E010	CAP. ELECTRO	1		250V
C311	CE04BW1H010M	CAP. ELECTRO	1	20%	50V
C312	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C313	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C314	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C315	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C316	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C317	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C318	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C319	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C320	CK45B2H103K	CAP. CERAMIC	0.01	10%	500V
D001	DS442X	DIODE			
D002	DS442X	DIODE			
D003	DS442X	DIODE			
D101	DS442X	DIODE			
D102	DS442X	DIODE			
D103	DS442X	DIODE			
D104	DS442X	DIODE			
D105	DS442X	DIODE			
D106	DS442X	DIODE			
D107	DS442X	DIODE			
D108	MTZ10JC	DIODE, ZENER	10V		
D301	S2VB40F	DIODE, BRIDGE			
D302	S2VB40F	DIODE, BRIDGE			
D303	S1VB60	DIODE			
D304	S1VB60	DIODE			
D305	DS442X	DIODE			
D306	DS442X	DIODE			
D307	V06B	DIODE			
L001	L40-1025-03	FERRI INDUCTOR			
L002	L40-1025-03	FERRI INDUCTOR			
P001	E40-0473-05	PIN CONNECTOR	4 P		
P002	E40-0273-05	PIN CONNECTOR	2 P		
P003	E04-0154-05	BNC RECEPTACLE			
P004	E23-0046-04	TERMINAL			
P005	E23-0046-04	TERMINAL			
P101	E40-0473-05	PIN CONNECTOR	4 P		
P301	E40-0930-05	PIN CONNECTOR	9P		
P302	E40-1116-05	PIN CONNECTOR	11P		
P303	E40-1116-05	PIN CONNECTOR	11P		
Q002	2SA1005(K)	TR. SI, PNP			
Q003	2SA1005(K)	TR. SI, PNP			
Q004	2SC2786(K)	TR. SI, NPN			
Q005	2SC2786(K)	TR. SI, NPN			
Q006	2SC2786(K)	TR. SI, NPN			
Q007	2SC2786(K)	TR. SI, NPN			
Q008	2SA1005(K)	TR. SI, PNP			
Q009	2SC2786(K)	TR. SI, NPN			
Q010	2SC2786(K)	TR. SI, NPN			
Q011	2SC2786(K)	TR. SI, NPN			
Q012	2SC2786(K)	TR. SI, NPN			
Q013	2SC2786(K)	TR. SI, NPN			

REF.NO	PARTS NO	NAME & DESCRIPTION
Q014	2SC2786(K)	TR. SI, NPN
Q015	2SC2407	TR. SI, NPN
Q016	2SC2407	TR. SI, NPN
Q017	2SC2912(R,S)	TR. SI, NPN
Q018	2SC2912(R,S)	TR. SI, NPN
Q102	2SA1005(K)	TR. SI, PNP
Q103	2SA1005(K)	TR. SI, PNP
Q104	2SC2786(K)	TR. SI, NPN
Q105	2SC2786(K)	TR. SI, NPN
Q106	2SC2785(F)	TR. SI, NPN
Q107	2SC2786(K)	TR. SI, NPN
Q108	2SC2786(K)	TR. SI, NPN
Q109	2SC2786(K)	TR. SI, NPN
Q110	2SC2786(K)	TR. SI, NPN
Q111	2SC2786(K)	TR. SI, NPN
Q112	2SC2786(K)	TR. SI, NPN
Q113	2SA1175(F)	TR. SI, PNP
Q114	2SC2785(F)	TR. SI, NPN
Q115	2SC2786(K)	TR. SI, NPN
Q301	2SA1009(L,K)	TR. SI, PNP
Q302	2SA1009(L,K)	TR. SI, PNP
Q303	2SA1175(F)	TR. SI, PNP
Q304	2SA1175(F)	TR. SI, PNP
Q305	2SC2271(E)	TR. SI, NPN
Q306	2SC2271(E)	TR. SI, NPN

R001	RD14BB2E105J	RES. CARBON	1M	5%	1/4W
R002	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R003	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R004	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R005	RD14BB2E120J	RES. CARBON	12	5%	1/4W
R006	RD14BB2E510J	RES. CARBON	51	5%	1/4W
R007	RD14BB2E510J	RES. CARBON	51	5%	1/4W
R008	RD14BB2E392J	RES. CARBON	3.9K	5%	1/4W
R009	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R010	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R011	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R012	RD14BB2E243J	RES. CARBON	24K	5%	1/4W
R013	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R014	RN14BK2E1000F	RES. METAL FILM	100	1%	1/4W
R015	RN14BK2E1301F	RES. METAL FILM	1.3K	1%	1/4W
R016	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R017	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R018	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R019	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R020	RD14BB2E331J	RES. CARBON	330	5%	1/4W
R021	RD14BB2E331J	RES. CARBON	330	5%	1/4W
R022	NO USE				
R023	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R024	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R025	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R026	RD14BB2E152J	RES. CARBON	1.5K	5%	1/4W
R027	RD14BB2E152J	RES. CARBON	1.5K	5%	1/4W
R028	RD14BB2E270J	RES. CARBON	27	5%	1/4W
R029	RD14BB2E270J	RES. CARBON	27	5%	1/4W
R030	RD14BB2E100J	RES. CARBON	10	5%	1/4W
R031	RD14BB2E151J	RES. CARBON	150	5%	1/4W
R032	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R033	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R034	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R035	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R036	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R037	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R038	RD14BB2E750J	RES. CARBON	75	5%	1/4W
R039	RD14BB2E431J	RES. CARBON	430	5%	1/4W
R040	RD14BB2E682J	RES. CARBON	6.8K	5%	1/4W
R041	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R042	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R043	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R044	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R045	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R046	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R047	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R048	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R049	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R050	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R051	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R052	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R053	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R054	RD14BB2E201J	RES. CARBON	200	5%	1/4W
R055	RD14BB2E201J	RES. CARBON	200	5%	1/4W
R056	RD14BB2E121J	RES. CARBON	120	5%	1/4W
R057	NO USE				
R058	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R059	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R060	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R061	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R062	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R063	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R064	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R065	RD14BB2E201J	RES. CARBON	200	5%	1/4W
R066	RD14BB2E511J	RES. CARBON	510	5%	1/4W
R067	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R068	RD14BB2E104J	RES. CARBON	100K	5%	1/4W

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION			
R069	RD14BB2E223J	RES. CARBON	22K	5%	1/4W
R101	RD14BB2E105J	RES. CARBON	1M	5%	1/4W
R102	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R103	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R104	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R105	RD14BB2E120J	RES. CARBON	12	5%	1/4W
R106	RD14BB2E510J	RES. CARBON	51	5%	1/4W
R107	RD14BB2E510J	RES. CARBON	51	5%	1/4W
R108	RD14BB2E392J	RES. CARBON	3.9K	5%	1/4W
R109	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R110	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R111	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R112	RD14BB2E243J	RES. CARBON	24K	5%	1/4W
R113	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R114	RN14BK2E1000F	RES. METAL FILM	100	1%	1/4W
R115	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R116	RN14BK2E1301F	RES. METAL FILM	1.3K	1%	1/4W
R117	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R118	RD14BB2E182J	RES. CARBON	1.8K	5%	1/4W
R119	RD14BB2E223J	RES. CARBON	22K	5%	1/4W
R120	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R121	RD14BB2E561J	RES. CARBON	560	5%	1/4W
R122	NO USE				
R123	RD14BB2E333J	RES. CARBON	33K	5%	1/4W
R124	RD14BB2E151J	RES. CARBON	150	5%	1/4W
R125	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R126	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R127	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R128	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R129	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R130	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R131	RD14BB2E750J	RES. CARBON	75	5%	1/4W
R132	RN14BK2E2001F	RES. METAL FILM	2K	1%	1/4W
R133	RN14BK2E2001F	RES. METAL FILM	2K	1%	1/4W
R134	RD14BB2E510J	RES. CARBON	51	5%	1/4W
R135	RD14BB2E511J	RES. CARBON	510	5%	1/4W
R136	RD14BB2E123J	RES. CARBON	12K	5%	1/4W
R137	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R138	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R139	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R140	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R141	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R142	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R143	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R144	RD14BB2E272J	RES. CARBON	2.7K	5%	1/4W
R145	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R146	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R147	RD14BB2E272J	RES. CARBON	2.7K	5%	1/4W
R148	RD14BB2E223J	RES. CARBON	22K	5%	1/4W
R149	RD14BB2E682J	RES. CARBON	6.8K	5%	1/4W
R150	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R151	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R152	RD14BB2E151J	RES. CARBON	150	5%	1/4W
R153	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R154	NO USE				
R155	RD14BB2E470J	RES. CARBON	47	5%	1/4W
R156	NO USE				
R157	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R158	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R159	RD14BB2E682J	RES. CARBON	6.8K	5%	1/4W
R301	RD14BB2E473J	RES. CARBON	47K	5%	1/4W
R302	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R303	RD14BB2E3R3J	RES. CARBON	3.3	5%	1/4W
R304	RD14BB2E100J	RES. CARBON	10	5%	1/4W
R305	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R306	RD14BB2E822J	RES. CARBON	8.2K	5%	1/4W
R307	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R308	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R309	RN14BK2E1502F	RES. METAL FILM	15K	1%	1/4W
R310	RN14BK2E1003F	RES. METAL FILM	100K	1%	1/4W
R311	RN14BK2E1602F	RES. METAL FILM	16K	1%	1/4W
R312	RN14BK2E1503F	RES. METAL FILM	150K	1%	1/4W
R313	RD14BY2H104J	RES. CARBON	100K	5%	1/2W
R314	RD14BY2H104J	RES. CARBON	100K	5%	1/2W
S101	S42-4509-05	PUSH SWITCH			
TC001	C05-0425-05	CAP. TRIMMER	70P		
TC002	C05-0425-05	CAP. TRIMMER	70P		
TC101	C05-0434-05	CAP. TRIMMER	20P		
TC102	C05-0434-05	CAP. TRIMMER	20P		
TP001	E23-0046-04	TERMINAL			
TP002	E23-0046-04	TERMINAL			
TP003	E23-0046-04	TERMINAL			
TP004	E23-0046-04	TERMINAL			
TP101	E23-0046-04	TERMINAL			
TP102	E23-0046-04	TERMINAL			
TP103	E23-0046-04	TERMINAL			
TP104	E23-0046-04	TERMINAL			
U001	M47F(B)	FET			

REF.NO	PARTS NO	NAME & DESCRIPTION	
U101	M47F(B)	FET	
U301	UPC7805H	IC	
U302	UPC7915HA	IC	
U303	NJM7815	IC	
U304	NJM4558D	IC	
VR001	R05-3506-05	V.R.	20K B
VR002	NO USE		
VR003	R12-0539-05	RES. SEMI FIXED	200 B
VR004	R12-0421-05	RES. SEMI FIXED	100 B
VR005	R12-0421-05	RES. SEMI FIXED	100 B
VR006	R12-0421-05	RES. SEMI FIXED	100 B
VR101	R05-3506-05	V.R.	20K B
VR102	R12-3523-05	RES. SEMI FIXED	20K B
VR103	R12-0541-05	RES. SEMI FIXED	100 B
VR104	R12-0543-05	RES. SEMI FIXED	500 B

VERTICAL AMP & POWER UNIT

(X73-1490-01)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	E33-4032-00	WIRE ASSY			
	F01-0835-05	HEAT SINK			
	F01-0836-04	HEAT SINK			
	J25-2999-03	PCB (UNMOUNTED)			
	J61-0517-05	STADOFF CLIP			
	N19-0191-05	WASHER NONMETAL			
	N30-3008-46	SCREW, PAN HD	M 3X8		
	R92-0150-05	JUMPING RES.	ZERO OHM		
	212-2014-05	TUBE (PLASTIC)			
C002	CC45CH1H1R5C	CAP. CERAMIC	1.5P	0.25P	50V
C006	CC45CH1H221J	CAP. CERAMIC	220P	5%	50V
C007	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C008	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C009	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C010	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C011	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C012	NO USE				
C013	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C014	CE04W1E220M	CAP. ELECTRO	22	20%	25V
C015	NO USE				
C016	CE04W1E220M	CAP. ELECTRO	22	20%	25V
C017	CE04BW1E220M	CAP. ELECTRO	22	20%	25V
C020	CC45CH1H1R5C	CAP. CERAMIC	1.5P	0.25P	50V
C301	CE04W1V222M	CAP. ELECTRO	2200	20%	35V
C302	CE04W1V222M	CAP. ELECTRO	2200	20%	35V
C303	CE04W1E222M	CAP. ELECTRO	2200	20%	25V
C304	C90-0910-05	CAP. ELECTRO	100	20%	200V
C305	CE04W2E470M	CAP. ELECTRO	47	20%	250V
C306	CE04W1A101M	CAP. ELECTRO	100	20%	10V
C307	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C308	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C309	CE04W2C100M	CAP. ELECTRO	10	20%	160V
C310	CE04W2E010M	CAP. ELECTRO	1	20%	250V
C311	CE04BW1H010M	CAP. ELECTRO	1	20%	50V
C312	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C313	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C314	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C315	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C316	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C317	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C318	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C319	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C320	CK45B2H103K	CAP. CERAMIC	0.01	10%	500V
D001	DS442X	DIODE			
D002	DS442X	DIODE			
D003	DS442X	DIODE			
D301	S2VB40F	DIODE, BRIDGE			
D302	S2VB40F	DIODE, BRIDGE			
D303	S1QB60	DIODE			
D304	S1QB60	DIODE			
D305	DS442X	DIODE			
D306	DS442X	DIODE			
D307	V06B	DIODE			
L001	L40-1025-03	FERRI INDUCTOR			
L002	L40-1025-03	FERRI INDUCTOR			
P001	E40-0473-05	PIN CONNECTOR	4P		
P002	E40-0273-05	PIN CONNECTOR	2P		
P003	E04-0154-05	BNC RECEPTACLE			
P301	E40-0930-05	PIN CONNECTOR	9P		
P302	E40-1116-05	PIN CONNECTOR	11P		
P303	E40-1116-05	PIN CONNECTOR	11P		

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION			
Q002	2SA1005(K)	TR. SI, PNP			
Q003	2SA1005(K)	TR. SI, PNP			
Q004	2SC2786(K)	TR. SI, NPN			
Q005	2SC2786(K)	TR. SI, NPN			
Q006	2SC2786(K)	TR. SI, NPN			
Q007	2SC2786(K)	TR. SI, NPN			
Q008	2SA1005(K)	TR. SI, PNP			
Q009	2SC2786(K)	TR. SI, NPN			
Q010	2SC2786(K)	TR. SI, NPN			
Q011	2SC2786(K)	TR. SI, NPN			
Q012	2SC2786(K)	TR. SI, NPN			
Q013	2SC2786(K)	TR. SI, NPN			
Q014	2SC2786(K)	TR. SI, NPN			
Q015	2SC2407	TR. SI, NPN			
Q016	2SC2407	TR. SI, NPN			
Q017	2SC2912(R,S)	TR. SI, NPN			
Q018	2SC2912(R,S)	TR. SI, NPN			
Q301	2SA1009(L,K)	TR. SI, PNP			
Q302	2SA1009(L,K)	TR. SI, PNP			
Q303	2SA1175(F)	TR. SI, PNP			
Q304	2SA1175(F)	TR. SI, PNP			
Q305	2SC2271(E)	TR. SI, NPN			
Q306	2SC2271(E)	TR. SI, NPN			
R001	RD14BB2E105J	RES. CARBON	1M	5%	1/4W
R002	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R003	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R004	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R005	RD14BB2E120J	RES. CARBON	12	5%	1/4W
R006	RD14BB2E510J	RES. CARBON	51	5%	1/4W
R007	RD14BB2E510J	RES. CARBON	51	5%	1/4W
R008	RD14BB2E392J	RES. CARBON	3.9K	5%	1/4W
R009	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R010	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R011	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R012	RD14BB2E243J	RES. CARBON	24K	5%	1/4W
R013	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R014	RN14BK2E1000F	RES. METAL FILM	100	1%	1/4W
R015	RN14BK2E1301F	RES. METAL FILM	1.3K	1%	1/4W
R016	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R017	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R018	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R019	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R020	RD14BB2E331J	RES. CARBON	330	5%	1/4W
R021	RD14BB2E331J	RES. CARBON	330	5%	1/4W
R022	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R023	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R024	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R025	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R026	RD14BB2E152J	RES. CARBON	1.5K	5%	1/4W
R027	RD14BB2E152J	RES. CARBON	1.5K	5%	1/4W
R028	RD14BB2E270J	RES. CARBON	27	5%	1/4W
R029	RD14BB2E270J	RES. CARBON	27	5%	1/4W
R030	RD14BB2E100J	RES. CARBON	10	5%	1/4W
R031	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R032	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R033	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R034	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R035	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R036	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R037	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R038	RD14BB2E750J	RES. CARBON	75	5%	1/4W
R039	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R040	RD14BB2E682J	RES. CARBON	6.8K	5%	1/4W
R041	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R042	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R043	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R044	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R045	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R046	RD14BB2E162J	RES. CARBON	1.6K	5%	1/4W
R047	NO USE				
R048	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R049	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R050	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R051	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R052	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R053	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R054	RD14BB2E201J	RES. CARBON	200	5%	1/4W
R055	RD14BB2E201J	RES. CARBON	200	5%	1/4W
R056	RD14BB2E121J	RES. CARBON	120	5%	1/4W
R057	NO USE				
R058	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R059	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R060	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R061	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R062	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R063	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R064	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R065	RD14BB2E201J	RES. CARBON	200	5%	1/4W
R066	RD14BB2E511J	RES. CARBON	510	5%	1/4W
R067	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R068	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R069	RD14BB2E223J	RES. CARBON	22K	5%	1/4W
R301	RD14BB2E473J	RES. CARBON	47K	5%	1/4W
R302	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R303	RD14BB2E3R3J	RES. CARBON	3.3	5%	1/4W
R304	RD14BB2E100J	RES. CARBON	10	5%	1/4W
R305	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R306	RD14BB2E822J	RES. CARBON	8.2K	5%	1/4W
R307	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R308	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R309	RN14BK2E1502F	RES. METAL FILM	15K	1%	1/4W
R310	RN14BK2E1003F	RES. METAL FILM	100K	1%	1/4W
R311	RN14BK2E1602F	RES. METAL FILM	16K	1%	1/4W
R312	RN14BK2E1503F	RES. METAL FILM	150K	1%	1/4W
R313	RD14BY2H104J	RES. CARBON	100K	5%	1/2W
R314	RD14BY2H104J	RES. CARBON	100K	5%	1/2W
TC001	C05-0425-05	CAP. TRIMMER	70P		
TC002	C05-0425-05	CAP. TRIMMER	70P		
TC101	C05-0434-05	CAP. TRIMMER	20P		
TP001	E23-0046-04	TERMINAL			
TP002	E23-0046-04	TERMINAL			
TP003	E23-0046-04	TERMINAL			
TP004	E23-0046-04	TERMINAL			
TP005	E23-0046-04	TERMINAL			
U001	M47F(B)	FET			
U301	μPC7805H	IC			
U302	μPC7915HA	IC			
U303	NJM7815	IC			
U304	NJM4558D	IC	DUAL OP AMP.		
VR001	R05-3506-05	V.R.	10K B		
VR002	NO USE				
VR003	R12-0539-05	RES. SEMI FIXED	200 B		
VR004	R12-0421-05	RES. SEMI FIXED	100 B		
VR005	R12-0421-05	RES. SEMI FIXED	100 B		
VR006	R12-0421-05	RES. SEMI FIXED	100 B		

VERTICAL AMP & POWER UNIT

(X73-1490-02)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	E23-0526-04	EARTH PLATE			
	E33-4031-00	WIRE ASSY			
	F01-0835-05	HEAT SINK			
	F01-0836-04	HEAT SINK			
	J25-2999-13	PCB (UNMOUNTED)			
	J61-0517-05	STADOFF CLIP			
	N19-0191-05	WASHER NONMETAL			
	N19-0702-04	WASHER			
	N30-3008-46	SCREW, PAN HD	M 3X8		
	R92-0150-05	JUMPING RES.	ZERO OHM		
	212-1018-05	TUBE (PLASTIC)			
	212-2014-05	TUBE (PLASTIC)			
C006	CC45CH1H471J	CAP. CERAMIC	470P	5%	50V
C007	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C008	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C009	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C010	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C011	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C012	NO USE				
C013	CC45CH1H470J	CAP. CERAMIC	47P	5%	50V
C014	CE04W1E220M	CAP. ELECTRO	22	20%	25V
C015	NO USE				
C016	CE04W1E220M	CAP. ELECTRO	22	20%	25V
C017	CE04BW1E220M	CAP. ELECTRO	22	20%	25V
C021	CC45CH1H050C	CAP. CERAMIC	5P	0.25P	50V
C103	CC45CH1H150J	CAP. CERAMIC	15P	5%	50V
C104	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C105	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C106	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C107	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C108	NO USE				
C109	CC45CH1H470J	CAP. CERAMIC	47P	5%	50V
C110	CC45CH1H470J	CAP. CERAMIC	47P	5%	50V
C111	CE04BW1H010M	CAP. ELECTRO	1	20%	50V
C112	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C116	CC45CH1H050C	CAP. CERAMIC	5P	0.25P	50V
C301	CE04W1V222M	CAP. ELECTRO	2200	20%	35V
C302	CE04W1V222M	CAP. ELECTRO	2200	20%	35V
C303	CE04W1E222M	CAP. ELECTRO	2200	20%	25V
C304	C90-0910-05	CAP. ELECTRO	100	20%	200V
C305	CE04W2E470	CAP. ELECTRO	47		250V
C306	CE04W1A101M	CAP. ELECTRO	100	20%	10V
C307	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C308	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C309	CE04W2C100	CAP. ELECTRO	10		160V
C310	CE04W2E010	CAP. ELECTRO	1		250V

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION			
C311	CE04BW1H010M	CAP. ELECTRO	1	20%	50V
C312	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C313	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C314	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C315	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C316	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C317	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C318	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C319	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C320	CK45B2H103K	CAP. CERAMIC	0.01	10%	500V
D001	DS442X	DIODE			
D002	DS442X	DIODE			
D003	DS442X	DIODE			
D101	DS442X	DIODE			
D102	DS442X	DIODE			
D103	DS442X	DIODE			
D104	DS442X	DIODE			
D105	DS442X	DIODE			
D106	DS442X	DIODE			
D107	DS442X	DIODE			
D108	MTZ10JC	DIODE, ZENER	10V		
D301	S2VB40F	DIODE, BRIDGE			
D302	S2VB40F	DIODE, BRIDGE			
D303	S1VB60	DIODE			
D304	S1VB60	DIODE			
D305	DS442X	DIODE			
D306	DS442X	DIODE			
D307	V06B	DIODE			
L001	L40-1025-03	FERRI INDUCTOR			
L002	L40-1025-03	FERRI INDUCTOR			
P001	E40-0473-05	PIN CONNECTOR	4 P		
P002	E40-0273-05	PIN CONNECTOR	2 P		
P003	E04-0154-05	BNC RECEPTACLE			
P004	E23-0046-04	TERMINAL			
P005	E23-0046-04	TERMINAL			
P101	E40-0473-05	PIN CONNECTOR	4 P		
P301	E40-0930-05	PIN CONNECTOR	9P		
P302	E40-1116-05	PIN CONNECTOR	11P		
P303	E40-1116-05	PIN CONNECTOR	11P		
Q002	2SA1005(K)	TR. SI, PNP			
Q003	2SA1005(K)	TR. SI, PNP			
Q004	2SC2786(K)	TR. SI, NPN			
Q005	2SC2785(F)	TR. SI, NPN			
Q006	2SC2785(F)	TR. SI, NPN			
Q007	2SC2785(F)	TR. SI, NPN			
Q008	2SA1005(K)	TR. SI, PNP			
Q009	2SC2785(F)	TR. SI, NPN			
Q010	2SC2785(F)	TR. SI, NPN			
Q011	2SC2785(F)	TR. SI, NPN			
Q012	2SC2785(F)	TR. SI, NPN			
Q013	2SC2785(F)	TR. SI, NPN			
Q014	2SC2785(F)	TR. SI, NPN			
Q015	2SC1973	TR. SI, NPN			
Q016	2SC1973	TR. SI, NPN			
Q017	2SC2912(R,S)	TR. SI, NPN			
Q018	2SC2912(R,S)	TR. SI, NPN			
Q102	2SA1005(K)	TR. SI, PNP			
Q103	2SA1005(K)	TR. SI, PNP			
Q104	2SC2786(K)	TR. SI, NPN			
Q105	2SC2785(F)	TR. SI, NPN			
Q106	2SC2785(F)	TR. SI, NPN			
Q107	2SC2785(F)	TR. SI, NPN			
Q108	2SC2785(F)	TR. SI, NPN			
Q109	2SC2785(F)	TR. SI, NPN			
Q110	2SC2785(F)	TR. SI, NPN			
Q111	2SC2785(F)	TR. SI, NPN			
Q112	2SC2785(F)	TR. SI, NPN			
Q113	2SA1175(F)	TR. SI, PNP			
Q114	2SC2785(F)	TR. SI, NPN			
Q115	2SC2785(F)	TR. SI, NPN			
Q301	2SA1009(L,K)	TR. SI, PNP			
Q302	2SA1009(L,K)	TR. SI, PNP			
Q303	2SA1175(F)	TR. SI, PNP			
Q304	2SA1175(F)	TR. SI, PNP			
Q305	2SC2271(E)	TR. SI, NPN			
Q306	2SC2271(E)	TR. SI, NPN			
R001	RD14BB2E105J	RES. CARBON	1M	5%	1/4W
R002	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R003	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R004	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R005	RD14BB2E120J	RES. CARBON	12	5%	1/4W
R006	RD14BB2E510J	RES. CARBON	51	5%	1/4W
R007	RD14BB2E510J	RES. CARBON	51	5%	1/4W
R008	RD14BB2E392J	RES. CARBON	3.9K	5%	1/4W
R009	RD14BB2E102J	RES. CARBON	1K	5%	1/4W

REF.NO	PARTS NO	NAME & DESCRIPTION			
R010	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R011	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R012	RD14BB2E223J	RES. CARBON	22K	5%	1/4W
R013	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R014	RN14BK2E1000F	RES. METAL FILM	100	1%	1/4W
R015	RN14BK2E1201F	RES. METAL FILM	1.2K	1%	1/4W
R016	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R017	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R018	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R019	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R020	RD14BB2E331J	RES. CARBON	330	5%	1/4W
R021	RD14BB2E331J	RES. CARBON	330	5%	1/4W
R022	NO USE				
R023	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R024	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R025	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R026	RD14BB2E152J	RES. CARBON	1.5K	5%	1/4W
R027	RD14BB2E152J	RES. CARBON	1.5K	5%	1/4W
R028	RD14BB2E270J	RES. CARBON	27	5%	1/4W
R029	RD14BB2E270J	RES. CARBON	27	5%	1/4W
R030	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R031	RD14BB2E470J	RES. CARBON	47	5%	1/4W
R032	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R033	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R034	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R035	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R036	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R037	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R038	RD14BB2E750J	RES. CARBON	75	5%	1/4W
R039	RD14BB2E431J	RES. CARBON	430	5%	1/4W
R040	RD14BB2E682J	RES. CARBON	6.8K	5%	1/4W
R041	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R042	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R043	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R044	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R045	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R046	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R047	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R048	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R049	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R050	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R051	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R052	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R053	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R054	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R055	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R056	RD14BB2E750J	RES. CARBON	75	5%	1/4W
R057	RD14BB2E121J	RES. CARBON	120	5%	1/4W
R058	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R059	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R060	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R061	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R062	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R063	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R064	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R065	RD14BB2E201J	RES. CARBON	200	5%	1/4W
R066	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R067	RD14BB2E272J	RES. CARBON	2.7K	5%	1/4W
R068	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R101	RD14BB2E105J	RES. CARBON	1M	5%	1/4W
R102	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R103	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R104	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R105	RD14BB2E120J	RES. CARBON	12	5%	1/4W
R106	RD14BB2E510J	RES. CARBON	51	5%	1/4W
R107	RD14BB2E510J	RES. CARBON	51	5%	1/4W
R108	RD14BB2E392J	RES. CARBON	3.9K	5%	1/4W
R109	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R110	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R111	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R112	RD14BB2E223J	RES. CARBON	22K	5%	1/4W
R113	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R114	RN14BK2E1000F	RES. METAL FILM	100	1%	1/4W
R115	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R116	RN14BK2E1201F	RES. METAL FILM	1.2K	1%	1/4W
R117	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R118	RD14BB2E182J	RES. CARBON	1.8K	5%	1/4W
R119	NO USE				
R120	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R121	RD14BB2E561J	RES. CARBON	560	5%	1/4W
R122	NO USE				
R123	RD14BB2E333J	RES. CARBON	33K	5%	1/4W
R124	RD14BB2E470J	RES. CARBON	47	5%	1/4W
R125	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R126	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R127	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R128	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R129	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R130	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R131	RD14BB2E750J	RES. CARBON	75	5%	1/4W
R132	RN14BK2E2001F	RES. METAL FILM	2K	1%	1/4W
R133	RN14BK2E2001F	RES. METAL FILM	2K	1%	1/4W
R134	RD14BB2E510J	RES. CARBON	51	5%	1/4W
R135	RD14BB2E511J	RES. CARBON	510	5%	1/4W
R136	RD14BB2E123J	RES. CARBON	12K	5%	1/4W
R137	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION			
R138	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R139	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R140	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R141	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R142	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R143	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R144	RD14BB2E272J	RES. CARBON	2.7K	5%	1/4W
R145	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R146	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R147	RD14BB2E272J	RES. CARBON	2.7K	5%	1/4W
R148	RD14BB2E223J	RES. CARBON	22K	5%	1/4W
R149	RD14BB2E682J	RES. CARBON	6.8K	5%	1/4W
R150	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R151	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R152	RD14BB2E151J	RES. CARBON	150	5%	1/4W
R153	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R154	NO USE				
R155	RD14BB2E470J	RES. CARBON	47	5%	1/4W
R156	NO USE				
R157	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R158	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R159	RD14BB2E223J	RES. CARBON	22K	5%	1/4W
R301	RD14BB2E473J	RES. CARBON	47K	5%	1/4W
R302	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R303	RD14BB2E3R3J	RES. CARBON	3.3	5%	1/4W
R304	RD14BB2E100J	RES. CARBON	10	5%	1/4W
R305	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R306	RD14BB2E822J	RES. CARBON	8.2K	5%	1/4W
R307	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R308	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R309	RN14BK2E1502F	RES. METAL FILM	15K	1%	1/4W
R310	RN14BK2E1003F	RES. METAL FILM	100K	1%	1/4W
R311	RN14BK2E1602F	RES. METAL FILM	16K	1%	1/4W
R312	RN14BK2E1503F	RES. METAL FILM	150K	1%	1/4W
R313	RD14BY2H104J	RES. CARBON	100K	5%	1/2W
R314	RD14BY2H104J	RES. CARBON	100K	5%	1/2W
S101	S42-4509-05	PUSH SWITCH			
TC001	C05-0425-05	CAP. TRIMMER	70P		
TC002	C05-0425-05	CAP. TRIMMER	70P		
TC101	C05-0434-05	CAP. TRIMMER	20P		
TC102	C05-0434-05	CAP. TRIMMER	20P		
TP001	E23-0046-04	TERMINAL			
TP002	E23-0046-04	TERMINAL			
TP003	E23-0046-04	TERMINAL			
TP004	E23-0046-04	TERMINAL			
TP101	E23-0046-04	TERMINAL			
TP102	E23-0046-04	TERMINAL			
TP103	E23-0046-04	TERMINAL			
TP104	E23-0046-04	TERMINAL			
U001	M47F(B)	FET			
U101	M47F(B)	FET			
U301	UPC7805H	IC			
U302	UPC7915HA	IC			
U303	NJM7815	IC			
U304	NJM4558D	IC			
VR001	R05-3506-05	V.R.	20K B		
VR002	NO USE				
VR003	R12-0539-05	RES. SEMI FIXED	200 B		
VR004	R12-0421-05	RES. SEMI FIXED	100 B		
VR005	R12-0421-05	RES. SEMI FIXED	100 B		
VR006	R12-0421-05	RES. SEMI FIXED	100 B		
VR101	R05-3506-05	V.R.	20K B		
VR102	R12-3523-05	RES. SEMI FIXED	20K B		
VR103	R12-0541-05	RES. SEMI FIXED	100 B		
VR104	R12-0543-05	RES. SEMI FIXED	500 B		

VERTICAL AMP & POWER UNIT

(X73-1490-03)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	E23-0526-04	EARTH PLATE			
	E33-4032-00	WIRE ASSY			
	F01-0835-05	HEAT SINK			
	F01-0836-04	HEAT SINK			
	J25-2999-13	PCB (UNMOUNTED)			
	J61-0517-05	STADOFF CLIP			
	N19-0191-05	WASHER NONMETAL			
	N19-0702-04	WASHER			
	N30-3008-46	SCREW, PAN HD	M 3X8		
	R92-0150-05	JUMPING RES.	ZERO OHM		
	212-2014-05	TUBE (PLASTIC)			
C006	CC45CH1H471J	CAP. CERAMIC	470P	5%	50V

REF.NO	PARTS NO	NAME & DESCRIPTION			
C007	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C008	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C009	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C010	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C011	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C012	NO USE				
C013	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C014	CE04W1E220M	CAP. ELECTRO	22	20%	25V
C015	NO USE				
C016	CE04W1E220M	CAP. ELECTRO	22	20%	25V
C017	CE04BW1E220M	CAP. ELECTRO	22	20%	25V
C021	CC45CH1H050C	CAP. CERAMIC	5P	0.25P	50V
C301	CE04W1V222M	CAP. ELECTRO	2200	20%	35V
C302	CE04W1V222M	CAP. ELECTRO	2200	20%	35V
C303	CE04W1E222M	CAP. ELECTRO	2200	20%	25V
C304	C90-0910-05	CAP. ELECTRO	100	20%	200V
C305	CE04W2E470	CAP. ELECTRO	47		250V
C306	CE04W1A101M	CAP. ELECTRO	100	20%	10V
C307	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C308	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C309	CE04W2C100	CAP. ELECTRO	10		160V
C310	CE04W2E010	CAP. ELECTRO	1		250V
C311	CE04BW1H010M	CAP. ELECTRO	1	20%	50V
C312	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C313	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C314	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C315	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C316	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C317	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C318	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C319	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C320	CK45B2H103K	CAP. CERAMIC	0.01	10%	50V
D001	DS442X	DIODE			
D002	DS442X	DIODE			
D003	DS442X	DIODE			
D301	S2VB40F	DIODE BRIDGE			
D302	S2VB40F	DIODE BRIDGE			
D303	S1VB60	DIODE			
D304	S1VB60	DIODE			
D305	DS442X	DIODE			
D306	DS442X	DIODE			
D307	V06B	DIODE			
L001	L40-1025-03	FERRI INDUCTOR			
L002	L40-1025-03	FERRI INDUCTOR			
P001	E40-0473-05	PIN CONNECTOR	4 P		
P002	E40-0273-05	PIN CONNECTOR	2 P		
P003	E04-0154-05	BNC RECEPTACLE			
P301	E40-0930-05	PIN CONNECTOR	9P		
P302	E40-1116-05	PIN CONNECTOR	11P		
P303	E40-1116-05	PIN CONNECTOR	11P		
Q002	2SA1005(K)	TR. SI, PNP			
Q003	2SA1005(K)	TR. SI, PNP			
Q004	2SC2786(K)	TR. SI, NPN			
Q005	2SC2785(F)	TR. SI, NPN			
Q006	2SC2785(F)	TR. SI, NPN			
Q007	2SC2785(F)	TR. SI, NPN			
Q008	2SA1005(K)	TR. SI, PNP			
Q009	2SC2785(F)	TR. SI, NPN			
Q010	2SC2785(F)	TR. SI, NPN			
Q011	2SC2785(F)	TR. SI, NPN			
Q012	2SC2785(F)	TR. SI, NPN			
Q013	2SC2785(F)	TR. SI, NPN			
Q014	2SC2785(F)	TR. SI, NPN			
Q015	2SC1973	TR. SI, NPN			
Q016	2SC1973	TR. SI, NPN			
Q017	2SC2912(R,S)	TR. SI, NPN			
Q018	2SC2912(R,S)	TR. SI, NPN			
Q301	2SA1009(L,K)	TR. SI, PNP			
Q302	2SA1009(L,K)	TR. SI, PNP			
Q303	2SA1175(F)	TR. SI, PNP			
Q304	2SA1175(F)	TR. SI, PNP			
Q305	2SC2271(E)	TR. SI, NPN			
Q306	2SC2271(E)	TR. SI, NPN			
R001	RD14BB2E105J	RES. CARBON	1M	5%	1/4W
R002	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R003	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R004	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R005	RD14BB2E120J	RES. CARBON	12	5%	1/4W
R006	RD14BB2E510J	RES. CARBON	51	5%	1/4W
R007	RD14BB2E510J	RES. CARBON	51	5%	1/4W
R008	RD14BB2E392J	RES. CARBON	3.9K	5%	1/4W
R009	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R010	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R011	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R012	RD14BB2E223J	RES. CARBON	22K	5%	1/4W
R013	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R014	RN14BK2E1000F	RES. METAL FILM	100	1%	1/4W

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION			
R015	RN14BK2E1201F	RES. METAL FILM	1.2K	1%	1/4W
R016	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R017	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R018	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R019	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R020	RD14BB2E331J	RES. CARBON	330	5%	1/4W
R021	RD14BB2E331J	RES. CARBON	330	5%	1/4W
R022	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R023	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R024	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R025	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R026	RD14BB2E152J	RES. CARBON	1.5K	5%	1/4W
R027	RD14BB2E152J	RES. CARBON	1.5K	5%	1/4W
R028	RD14BB2E270J	RES. CARBON	27	5%	1/4W
R029	RD14BB2E270J	RES. CARBON	27	5%	1/4W
R030	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R031	RD14BB2E470J	RES. CARBON	47	5%	1/4W
R032	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R033	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R034	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R035	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R036	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R037	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R038	RD14BB2E750J	RES. CARBON	75	5%	1/4W
R039	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R040	RD14BB2E682J	RES. CARBON	6.8K	5%	1/4W
R041	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R042	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R043	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R044	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R045	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R046	RD14BB2E162J	RES. CARBON	1.6K	5%	1/4W
R047	NO USE				
R048	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R049	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R050	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R051	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R052	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R053	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R054	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R055	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R056	RD14BB2E750J	RES. CARBON	75	5%	1/4W
R057	RD14BB2E121J	RES. CARBON	120	5%	1/4W
R058	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R059	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R060	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R061	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R062	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R063	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R064	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R065	RD14BB2E201J	RES. CARBON	200	5%	1/4W
R066	RD14BB2E112J	RES. CARBON	1.1K	5%	1/4W
R067	RD14BB2E272J	RES. CARBON	2.7K	5%	1/4W
R068	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R301	RD14BB2E473J	RES. CARBON	47K	5%	1/4W
R302	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R303	RD14BB2E3R3J	RES. CARBON	3.3	5%	1/4W
R304	RD14BB2E100J	RES. CARBON	10	5%	1/4W
R305	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R306	RD14BB2E822J	RES. CARBON	8.2K	5%	1/4W
R307	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R308	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R309	RN14BK2E1502F	RES. METAL FILM	15K	1%	1/4W
R310	RN14BK2E1003F	RES. METAL FILM	100K	1%	1/4W
R311	RN14BK2E1602F	RES. METAL FILM	16K	1%	1/4W
R312	RN14BK2E1503F	RES. METAL FILM	150K	1%	1/4W
R313	RD14BY2H104J	RES. CARBON	100K	5%	1/2W
R314	RD14BY2H104J	RES. CARBON	100K	5%	1/2W
TC001	C05-0425-05	CAP. TRIMMER	70P		
TC002	C05-0425-05	CAP. TRIMMER	70P		
TC101	C05-0434-05	CAP. TRIMMER	20P		
TP001	E23-0046-04	TERMINAL			
TP002	E23-0046-04	TERMINAL			
TP003	E23-0046-04	TERMINAL			
TP004	E23-0046-04	TERMINAL			
TP005	E23-0046-04	TERMINAL			
U001	M47F(B)	FET			
U301	UPC7805H	IC			
U302	UPC7915HA	IC			
U303	NJM7815	IC			
U304	NJM4558D	IC			
VR001	R05-3506-05	V.R.	20K B		
VR002	NO USE				
VR003	R12-0539-05	RES. SEMI FIXED	200 B		
VR004	R12-0421-05	RES. SEMI FIXED	100 B		
VR005	R12-0421-05	RES. SEMI FIXED	100 B		
VR006	R12-0421-05	RES. SEMI FIXED	100 B		

HORIZONTAL & HIGH VOLTAGE UNIT

(X74-1340-00)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	E23-0015-04	EARTH LUG			
	E23-0046-04	TERMINAL			
	E31-2170-05	JUMPING WIRE			
	E33-4028-00	WIRE ASSY			
	F01-0230-04	HEAT SINK			
	F01-0820-04	HEAT SINK			
	F01-0835-05	HEAT SINK			
	F15-0727-04	HOLDER (NEON TUBE)			
	F20-0622-05	INSULATOR			
	J25-2998-13	PCB (UNMOUNTED)			
	J31-0604-04	COLLAR			
	N19-0191-05	WASHER NONMETAL			
	N30-3008-46	SCREW, PAN HD	M 3X8		
	R92-0150-05	JUMPING RES.	ZERO OHM		
	W02-0408-05	HIGH VOLTAGE POWER BLOCK			
	002-0001-05	BRAIDED WIRE			
	212-1018-05	TUBE (PLASTIC)			
	212-3013-05	TUBE (PLASTIC)			
C001	CC45CH1H330J	CAP. CERAMIC	33P	5%	50V
C002	CC45CH2H010C	CAP. CERAMIC	1P	0.25P	500V
C003	CK45B2H472K	CAP. CERAMIC	4700P	10%	500V
C004	CE04W1H100M	CAP. ELECTRO	10	20%	50V
C005	CE04W2E100	CAP. ELECTRO	10		250V
C006	CQ93FM1H104K	CAP. MYLAR	0.1	10%	50V
C007	CQ93FM1H153K	CAP. MYLAR	0.015	10%	50V
C008	CE04W1V471M	CAP. ELECTRO	470	20%	35V
C009	CQ93FM1H104K	CAP. MYLAR	0.1	10%	50V
C010	CQ93FM1H223K	CAP. MYLAR	0.022	10%	50V
C011	CK45B2H102K	CAP. CERAMIC	1000P	10%	500V
C012	CK45E3D103P	CAP. CERAMIC	0.01		2K
C013	CK45E3D103P	CAP. CERAMIC	0.01		2K
C014	NO USE				
C015	CE04W2E010	CAP. ELECTRO	1		250V
C016	CE04W2E4R7	CAP. ELECTRO	4.7		250V
C017	CK45B2H472K	CAP. CERAMIC	4700P	10%	500V
C018	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C019	CC45FCH1H100D	CAP. CERAMIC	10P	0.5P	50V
C020	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C021	CK45B2H103K	CAP. CERAMIC	0.01	10%	500V
C022	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C023	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C024	C90-0912-05	CAP. ELECTRO	220	20%	35V
C025	C90-0912-05	CAP. ELECTRO	220	20%	35V
C026	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C027	CK45B2H472K	CAP. CERAMIC	4700P	10%	500V
C028	CE04W2A3R3M	CAP. ELECTRO	3.3	20%	100V
C029	C91-0571-05	CAP. CERAMIC	0.01		2KV
C030	CK45E3D102P	CAP. CERAMIC	1000P		2K
C031	CC45CH1H180J	CAP. CERAMIC	18P	5%	50V
C101	CQ93FM1H103K	CAP. MYLAR	0.01	10%	50V
C102	CQ93FM1H103K	CAP. MYLAR	0.01	10%	50V
C103	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C104	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C105	CC45CH1H121J	CAP. CERAMIC	120P	5%	50V
C106	CE04W1H100M	CAP. ELECTRO	10	20%	50V
C107	NO USE				
C108	C90-0298-05	CAP. CERAMIC	0.1	20%	12V
C109	CK45B1H472K	CAP. CERAMIC	4700P	10%	50V
C110	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C111	CC45CH1H101J	CAP. CERAMIC	100P	5%	50V
C112	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C113	CC45CH1H101J	CAP. CERAMIC	100P	5%	50V
C114	CE04BW1H010M	CAP. ELECTRO	1	20%	50V
C115	CE04W1A101M	CAP. ELECTRO	100	20%	10V
C116	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C117	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C118	CC45CH2H100D	CAP. CERAMIC	10P	0.5P	500V
C119	CC45CH2H040C	CAP. CERAMIC	4P	0.25P	500V
C120	CF93AN2A105J	CAP. POLYESTHEL	1	5%	100V
C121	CQ93BP2A103F	CAP. MYLAR	0.01	1%	100V
C122	CM93BD2A900J	CAP. MICA	90P	5%	100V
C123	CQ93FM1H102K	CAP. MYLAR	1000P	10%	50V
C124	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C125	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C126	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C127	CC45FCH1H330J	CAP. CERAMIC	33P	5%	50V
C128	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C129	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C130	NO USE				
C131	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C132	NO USE				
C133	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C134	CC45FCH1H270J	CAP. CERAMIC	27P	5%	50V
C135	CC45CH2H010C	CAP. CERAMIC	1P	0.25P	500V
C136	CM93BD2A151J	CAP. MICA	150P	5%	100V
C137	CC45CH1H680J	CAP. CERAMIC	68P	5%	50V
C138	NO USE				
C139	CC45CH2H060D	CAP. CERAMIC	6P	0.5P	500V
C140	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C141	CK45FB1H102K	CAP. CERAMIC	1000P	10%	50V

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION			
C142	CC45CH1H221J	CAP. CERAMIC	220P	5%	50V
C143	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C144	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C145	C90-0298-05	CAP. CERAMIC	0.1	20%	12V
C146	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C147	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C148	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C149	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C150	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C151	CE04W1A221M	CAP. ELECTRO	220	20%	10V
C152	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C153	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C154	CE04W2E4R7	CAP. ELECTRO	4.7		250V
C155	CK45B2H472K	CAP. CERAMIC	4700P	10%	500V
C158	CC45FCH1H150J	CAP. CERAMIC	15P	5%	50V
C159	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C160	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C161	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C162	NO USE				
C163	CC45FCH1H100D	CAP. CERAMIC	10P	0.5P	50V
C164	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C165	CC45CH1H101J	CAP. CERAMIC	100P	5%	50V
C166	NO USE				
C167	CC45CH1H101J	CAP. CERAMIC	100P	5%	50V
C168	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C169	NO USE				
C170	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C171	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C172	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C173	C90-0298-05	CAP. CERAMIC	0.1	20%	12V
C174	C90-0298-05	CAP. CERAMIC	0.1	20%	12V
C175	NO USE				
C176	CK45B1H152K	CAP. CERAMIC	1500P	10%	50V
D001	DS442X	DIODE, SILICON	SWITCHING		
D002	DS442X	DIODE, SILICON	SWITCHING		
D003	NO USE				
D004	W06C	DIODE, SILICON	RECTIFIER		
D005	W06C	DIODE, SILICON	RECTIFIER		
D006	1SS83	DIODE, SILICON	SWITCHING		
D007	1SS83	DIODE, SILICON	SWITCHING		
D008	DS442X	DIODE, SILICON	SWITCHING		
D009	DS442X	DIODE, SILICON	SWITCHING		
D101	DS442X	DIODE, SILICON	SWITCHING		
D102	NO USE				
D103	DS442X	DIODE, SILICON	SWITCHING		
D104	DS442X	DIODE, SILICON	SWITCHING		
D105	DS442X	DIODE, SILICON	SWITCHING		
D106	DS442X	DIODE, SILICON	SWITCHING		
D107	DS442X	DIODE, SILICON	SWITCHING		
D108	DS442X	DIODE, SILICON	SWITCHING		
D109	DS442X	DIODE, SILICON	SWITCHING		
D110	DS442X	DIODE, SILICON	SWITCHING		
D111	DS442X	DIODE, SILICON	SWITCHING		
D112	DS442X	DIODE			
D113	DS442X	DIODE			
D114	NO USE				
D115	DS442X	DIODE			
D116	NO USE				
D117	MTZ5.1JB	DIODE, ZENER	5V		
D121	DS442X	DIODE, SILICON	SWITCHING		
D124	DS442X	DIODE			
D125	DS442X	DIODE			
L001	L40-1011-13	FERRI INDUCTOR	100UH		
L002	L40-1011-13	FERRI INDUCTOR	100UH		
L003	L40-1021-03	FERRI INDUCTOR			
L004	L40-1021-13	FERRI INDUCTOR			
L005	L40-1021-13	FERRI INDUCTOR			
L006	L40-1021-13	FERRI INDUCTOR			
L007	L40-1021-13	FERRI INDUCTOR			
L008	L40-4791-02	FERRI INDUCTOR	4.7UH		
L101	L40-1011-13	FERRI INDUCTOR	100UH		
NL001	NE-2B	NEON LAMP			
NL002	NE-2B	NEON LAMP			
P001	E40-0274-05	PIN CONNECTOR	2 P		
P002	E40-0374-05	PIN CONNECTOR	3P		
P003	E40-0335-05	PIN CONNECTOR	3P		
P004	E40-0535-05	PIN CONNECTOR	5P		
P005	E40-0233-05	PIN CONNECTOR	2P		
P101	E40-1116-05	PIN CONNECTOR	11P		
P102	E40-1116-05	PIN CONNECTOR	11P		
P103	E40-0273-05	PIN CONNECTOR	2 P		
Q001	2SC2912(S)	TR. SI, NPN			
Q002	2SA1210(S)	TR. SI, PNP			
Q003	2SD613(E)	TR. SI, NPN			
Q004	2SC2785(F)	TR. SI, NPN			
Q005	2SC2271(D)	TR. SI, NPN			
Q101	2SK117(Y)	FET. N-CHANNEL			
Q102	2SK117(Y)	FET. N-CHANNEL			
Q103	2SC2785(F)	TR. SI, NPN			
Q104	2SC2785(F)	TR. SI, NPN			
Q105	2SC2785(F)	TR. SI, NPN			
Q106	2SC2785(F)	TR. SI, NPN			
Q107	2SA1175(F)	TR. SI, PNP			
Q108	2SA1175(F)	TR. SI, PNP			
Q109	2SA838(C)	TR. SI, PNP			
Q110	2SA838(C)	TR. SI, PNP			
Q111	2SA1175(F)	TR. SI, PNP			
Q112	2SA1175(F)	TR. SI, PNP			
Q113	2SC2785(F)	TR. SI, NPN			
Q114	2SC2785(F)	TR. SI, NPN			
Q115	2SK117(Y)	FET. N-CHANNEL			
Q116	2SC2785(F)	TR. SI, NPN			
Q117	2SC2785(F)	TR. SI, NPN			
Q118	2SC2785(F)	TR. SI, NPN			
Q119	2SC2785(F)	TR. SI, NPN			
Q120	2SC2785(F)	TR. SI, NPN			
Q121	2SA1175(F)	TR. SI, PNP			
Q122	2SA1175(F)	TR. SI, PNP			
Q123	2SA1175(F)	TR. SI, PNP			
Q124	2SC2912(S)	TR. SI, NPN			
Q125	2SA1210(S)	TR. SI, PNP			
Q126	2SC2785(F)	TR. SI, NPN			
Q127	2SC2912(S)	TR. SI, NPN			
Q128	2SC2785(F)	TR. SI, NPN			
Q129	2SC2785(F)	TR. SI, NPN			
R001	RN14BK2E4701F	RES. METAL FILM	4.7K	1%	1/4W
R002	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R003	RD14BB2E183J	RES. CARBON	18K	5%	1/4W
R004	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R005	RN14BK2E4702F	RES. METAL FILM	47K	1%	1/4W
R006	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R007	RN14BK2E3303F	RES. METAL FILM	330K	1%	1/4W
R008	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R009	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R010	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R011	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R012	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R013	R92-1033-05	RES. FIXED	33M		
R014	RD14BB2E334J	RES. CARBON	330K	5%	1/4W
R015	R92-1034-05	RES. METAL FILM	47M		
R016	R92-1031-05	RES. FIXED	4.7M		
R017	R92-0800-05	RES. FIXED	10M		
R018	RD14BB2E823J	RES. CARBON	82K	5%	1/4W
R019	RD14BB2E393J	RES. CARBON	39K	5%	1/4W
R020	RD14BB2E333J	RES. CARBON	33K	5%	1/4W
R021	RD14BB2E473J	RES. CARBON	47K	5%	1/4W
R022	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R023	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R024	RN14BK2E6800F	RES. METAL FILM	680	1%	1/4W
R025	RN14BK2E2402F	RES. METAL FILM	24K	1%	1/4W
R026	RN14BK2E1302F	RES. METAL FILM	13K	1%	1/4W
R027	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R028	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R029	RD14BB2E4R7J	RES. CARBON	4.7	5%	1/4W
R030	NO USE				
R031	RD14BB2E470J	RES. CARBON	47	5%	1/4W
R032	RD14BB2E224J	RES. CARBON	220K	5%	1/4W
R033	RD14BB2E563J	RES. CARBON	56K	5%	1/4W
R101	RN14BK2E1004F	RES. METAL FILM	1M	1%	1/4W
R102	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R103	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R104	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R105	RD14BB2E201J	RES. CARBON	200	5%	1/4W
R106	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R107	RN14BK2E3301F	RES. METAL FILM	3.3K	1%	1/4W
R108	RN14BK2E3300F	RES. METAL FILM	330	1%	1/4W
R109	RN14BK2E3600F	RES. METAL FILM	360	1%	1/4W
R110	RN14BK2E4701F	RES. METAL FILM	4.7K	1%	1/4W
R111	RN14BK2E5101F	RES. METAL FILM	5.1K	1%	1/4W
R112	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R113	RD14BB2E183J	RES. CARBON	18K	5%	1/4W
R114	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R115	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R116	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R117	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R118	RD14BB2E105J	RES. CARBON	1M	5%	1/4W
R119	RD14BB2E622J	RES. CARBON	6.2K	5%	1/4W
R120	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R121	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R122	RN14BK2E2701F	RES. METAL FILM	2.7K	1%	1/4W
R123	RN14BK2E3600F	RES. METAL FILM	360	1%	1/4W
R124	RN14BK2E3600F	RES. METAL FILM	360	1%	1/4W
R125	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R126	RN14BK2E1002F	RES. METAL FILM	10K	1%	1/4W
R127	RN14BK2E2701F	RES. METAL FILM	2.7K	1%	1/4W
R128	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R129	RD14BB2E561J	RES. CARBON	560	5%	1/4W
R130	RD14BB2E182J	RES. CARBON	1.8K	5%	1/4W

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION			
R131	RD14BB2E681J	RES. CARBON	680	5%	1/4W
R132	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R133	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R134	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R135	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R136	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R137	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R138	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R139	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R140	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R141	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R142	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R143	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R144	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R145	RD14BB2E182J	RES. CARBON	1.8K	5%	1/4W
R146	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R147	RN14BK2E3302F	RES. METAL FILM	33K	1%	1/4W
R148	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R149	RN14BK2E3602F	RES. METAL FILM	36K	1%	1/4W
R150	RS14GB3D183J	RES. METAL FILM	18K	5%	2W
R151	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R152	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R153	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R154	RD14BB2E133J	RES. CARBON	13K	5%	1/4W
R155	RD14BB2C132J	RES. CARBON	1.3K	5%	1/6W
R156	RN14BK2E1201F	RES. METAL FILM	1.2K	1%	1/4W
R157	RN14BK2E1201F	RES. METAL FILM	1.2K	1%	1/4W
R158	RN14BK2E4301F	RES. METAL FILM	4.3K	1%	1/4W
R159	RN14BK2E9101F	RES. METAL FILM	9.1K	1%	1/4W
R160	RN14BK2E3004F	RES. METAL FILM	3M	1%	1/4W
R161	RN14BK2E1004F	RES. METAL FILM	1M	1%	1/4W
R162	RN14BK2E5003F	RES. METAL FILM	500K	1%	1/4W
R163	RN14BK2E3003F	RES. METAL FILM	300K	1%	1/4W
R164	RN14BK2E1003F	RES. METAL FILM	100K	1%	1/4W
R165	RN14BK2E5002F	RES. METAL FILM	50K	1%	1/4W
R166	RN14BK2E3002F	RES. METAL FILM	30K	1%	1/4W
R167	RN14BK2E2002F	RES. METAL FILM	20K	1%	1/4W
R168	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R169	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R170	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R171	RN14BK2E4701F	RES. METAL FILM	4.7K	1%	1/4W
R172	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R173	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R174	RD14BB2E391J	RES. CARBON	390	5%	1/4W
R175	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R176	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R177	RD14BB2E182J	RES. CARBON	1.8K	5%	1/4W
R178	RD14BB2E182J	RES. CARBON	1.8K	5%	1/4W
R179	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R180	RN14BK2E9101F	RES. METAL FILM	9.1K	1%	1/4W
R181	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R182	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R183	RD14BB2E683J	RES. CARBON	68K	5%	1/4W
R184	RD14BB2E621J	RES. CARBON	620	5%	1/4W
R185	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R186	RD14BB2E473J	RES. CARBON	47K	5%	1/4W
R187	RD14BB2E183J	RES. CARBON	18K	5%	1/4W
R188	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R189	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R190	RS14GB3D103J	RES. METAL FILM	10K	5%	2W
R191	RD14BB2E683J	RES. CARBON	68K	5%	1/4W
R192	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R193	RD14BB2E122J	RES. CARBON	1.2K	5%	1/4W
R194	RD14BB2E122J	RES. CARBON	1.2K	5%	1/4W
R195	RD14BB2E821J	RES. CARBON	820	5%	1/4W
R196	RD14BB2E821J	RES. CARBON	820	5%	1/4W
R197	NO USE				
R198	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R199	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R205	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R206	RD14BB2E363J	RES. CARBON	36K	5%	1/4W
R207	RN14BK2E1202F	RES. METAL FILM	12K	1%	1/4W
R210	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R211	RD14BB2E470J	RES. CARBON	47	5%	1/4W
R212	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R213	NO USE				
R214	RN14BK2E5101F	RES. METAL FILM	5.1K	1%	1/4W
R217	RD14BB2E183J	RES. CARBON	18K	5%	1/4W
R221	RD14BB2E133J	RES. CARBON	13K	5%	1/4W
R222	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R225	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R226	NO USE				
R227	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R228	RD14BB2C133J	RES. CARBON	13K	5%	1/6W
S101	R01-3510-05	V.R. WITH SW.	10K B		
S102	R01-3510-05	V.R. WITH SW.	10K B		
S103	S02-2505-15	ROTARY SWITCH	WITH VR.2KB		
S104	S33-2501-05	LEVER SWITCH			
S105	S32-2012-05	LEVER SWITCH			
S106	S32-4007-05	SLIDE SWITCH			

REF.NO	PARTS NO	NAME & DESCRIPTION
T001	L19-0412-05	CONVERTOR TRANSFORMER
TC101	C05-0422-05	CAP. TRIMMER 20P
TC102	C05-0421-05	CAP. TRIMMER 10P
U001	NJM4558D	IC
U101	MC10103L	IC, QUAD 2-INPUT OR GATE
U102	SN74LS112N	IC
U103	SN74LS02N	IC, QUAD 2-INPUT NOR GATE
U104	SN74LS00N	IC
U105	SN74LS08N	IC, QUAD 2-INPUT AND GATE
VR001	R12-5516-05	RES. SEMI FIXED 100K B
VR101	R01-3510-05	V.R. WITH SW. 10K B
VR102	R01-3510-05	V.R. WITH SW. 10K B
VR103	S02-2505-15	ROTARY SWITCH WITH VR.2KB
VR104	R12-3520-05	RES. SEMI FIXED 10K B
VR105	R12-1518-05	RES. SEMI FIXED 2K B
VR106	R12-0421-05	RES. SEMI FIXED 100 B
VR107	R12-1517-05	RES. SEMI FIXED 1K B
VR108	NO USE	
VR109	R12-5518-05	RES. SEMI FIXED 200K OHM B
VR110	NO USE	
VR111	R12-0540-05	RES. SEMI FIXED 500 B

HORIZONTAL & HIGH VOLTAGE UNIT

(X74-1340-01)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	E23-0015-04	EARTH LUG			
	E23-0046-04	TERMINAL			
	E31-2170-05	JUMPING WIRE			
	E33-4029-00	WIRE ASSY			
	F01-0230-04	HEAT SINK			
	F01-0820-04	HEAT SINK			
	F01-0835-05	HEAT SINK			
	F15-0727-04	HOLDER (NEON TUBE)			
	F20-0622-05	INSULATOR			
	J25-2998-13	PCB (UNMOUNTED)			
	J31-0604-04	COLLAR			
	J31-0604-04	COLLAR			
	N19-0191-05	WASHER NONMETAL			
	N30-3006-46	SCREW, PAN HD	M 3X6		
	N30-3008-46	SCREW, PAN HD	M 3X8		
	R92-0150-05	JUMPING RES.	ZERO OHM		
	W02-0408-05	HIGH VOLTAGE POWER BLOCK			
	212-3013-05	TUBE (PLASTIC)			
C001	CC45FCH1H330J	CAP. CERAMIC	33P	5%	50V
C002	CC45CH2H010C	CAP. CERAMIC	1P	0.25P	500V
C003	CK45B2H472K	CAP. CERAMIC	4700P	10%	500V
C004	CE04FW1H100M	CAP. ELECTRO	10	20%	50V
C005	CE04W2E100M	CAP. ELECTRO	10	20%	250V
C006	CQ93FM1H104K	CAP. MYLAR	0.1	10%	50V
C007	CQ93FM1H153K	CAP. MYLAR	0.015	10%	50V
C008	CE04W1V471M	CAP. ELECTRO	470	20%	35V
C009	CQ93FM1H104K	CAP. MYLAR	0.1	10%	50V
C010	CQ93FM1H223K	CAP. MYLAR	0.022	10%	50V
C011	CK45B2H102K	CAP. CERAMIC	1000P	10%	500V
C012	CK45E3D103P	CAP. CERAMIC	0.01		2K
C013	CK45E3D103P	CAP. CERAMIC	0.01		2K
C014	NO USE				
C015	CE04W2E010M	CAP. ELECTRO	1	20%	250V
C016	CE04W2E4R7M	CAP. ELECTRO	4.7	20%	250V
C017	CK45B2H472K	CAP. CERAMIC	4700P	10%	500V
C018	CE04FW1E470M	CAP. ELECTRO	47	20%	25V
C019	CC45FCH1H100D	CAP. CERAMIC	10P	0.5P	50V
C020	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C021	CK45B2H103K	CAP. CERAMIC	0.01	10%	500V
C022	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C023	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C024	C90-0912-05	CAP. ELECTRO	220	20%	35V
C025	C90-0912-05	CAP. ELECTRO	220	20%	35V
C026	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C027	CK45B2H472K	CAP. CERAMIC	4700P	10%	500V
C028	CE04FW2A3R3M	CAP. ELECTRO	3.3	20%	100V
C029	C91-0571-05	CAP. CERAMIC	0.01		2KV
C030	CK45E3D102P	CAP. CERAMIC	1000P		2K
C031	CC45FCH1H180J	CAP. CERAMIC	18P	5%	50V
C101	CQ93FM1H103K	CAP. MYLAR	0.01	10%	50V
C102	CQ93FM1H103K	CAP. MYLAR	0.01	10%	50V
C103	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C104	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C105	CC45CH1H221J	CAP. CERAMIC	220P	5%	50V
C106	CE04FW1H100M	CAP. ELECTRO	10	20%	50V
C107	NO USE				
C108	CE04HW1H010M	CAP. ELECTRO	1	20%	50V
C109	CK45B1H472K	CAP. CERAMIC	4700P	10%	50V
C110	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C111	CC45CH1H101J	CAP. CERAMIC	100P	5%	50V
C112	CK45F1H103Z	CAP. CERAMIC	0.01		50V

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION			
C113	CC45CH1H101J	CAP. CERAMIC	100P	5%	50V
C114	CE04HW1H010M	CAP. ELECTRO	1	20%	50V
C115	CE04FW1A101M	CAP. ELECTRO	100	20%	10V
C116	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C117	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C118	CC45CH2H100D	CAP. CERAMIC	10P	0.5P	500V
C119	CC45CH2H040C	CAP. CERAMIC	4P	0.25P	500V
C120	CF93AN2A105J	CAP. POLYESTHEL	1	5%	100V
C121	CQ93BP2A103F	CAP. MYLAR	0.01	1%	100V
C122	CM93BD2A900J	CAP. MICA	90P	5%	100V
C123	CQ93FM1H102K	CAP. MYLAR	1000P	10%	50V
C124	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C125	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C126	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C127	CC45FCH1H330J	CAP. CERAMIC	33P	5%	50V
C128	CE04FW1E470M	CAP. ELECTRO	47	20%	25V
C129	CE04FW1H010M	CAP. ELECTRO	1	20%	50V
C130	NO USE				
C131	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C132	NO USE				
C133	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C134	CC45FCH1H270J	CAP. CERAMIC	27P	5%	50V
C135	CC45CH2H010C	CAP. CERAMIC	1P	0.25P	500V
C135	CC45CH2H030C	CAP. CERAMIC	3P	0.25P	500V
C136	CM93BD2A151J	CAP. MICA	150P	5%	100V
C137	CC45CH1H680J	CAP. CERAMIC	68P	5%	50V
C138	CC45CH2H060D	CAP. CERAMIC	6P	0.5P	500V
C139	CC45CH2H060D	CAP. CERAMIC	6P	0.5P	500V
C140	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C143	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C144	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C145	C91-0572-05	CAP. CERAMIC	0.1		12V
C146	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C147	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C148	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C149	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C150	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C151	CE04W1A221M	CAP. ELECTRO	220	20%	10V
C152	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C153	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C154	CE04W2E4R7M	CAP. ELECTRO	4.7	20%	250V
C155	CK45B2H472K	CAP. CERAMIC	4700P	10%	500V
C156	NO USE				
C157	CQ93FM1H103K	CAP. MYLAR	0.01	10%	50V
C158	CC45FCH1H150J	CAP. CERAMIC	15P	5%	50V
C159	CE04FW1E470M	CAP. ELECTRO	47	20%	25V
C160	CE04FW1E470M	CAP. ELECTRO	47	20%	25V
C161	CE04FW1E470M	CAP. ELECTRO	47	20%	25V
C162	NO USE				
C163	CC45FCH1H100D	CAP. CERAMIC	10P	0.5P	50V
C164	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C165	CC45CH1H101J	CAP. CERAMIC	100P	5%	50V
C166	CC45FCH1H100D	CAP. CERAMIC	10P	0.5P	50V
C167	CC45CH1H101J	CAP. CERAMIC	100P	5%	50V
C168	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C169	NO USE				
C170	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C171	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C172	NO USE				
C173	C91-0572-05	CAP. CERAMIC	0.1		12V
C174	C91-0572-05	CAP. CERAMIC	0.1		12V
D001	DS442X	DIODE			
D002	DS442X	DIODE			
D003	NO USE				
D004	W06C	DIODE SILICON	RECTIFIER		
D005	W06C	DIODE SILICON	RECTIFIER		
D006	1SS83	DIODE SILICON	SWITCHING		
D007	1SS83	DIODE SILICON	SWITCHING		
D008	DS442X	DIODE			
D009	DS442X	DIODE			
D101	DS442X	DIODE			
D102	NO USE				
D103	DS442X	DIODE			
D104	DS442X	DIODE			
D105	DS442X	DIODE			
D106	DS442X	DIODE			
D107	DS442X	DIODE			
D108	DS442X	DIODE			
D109	DS442X	DIODE			
D110	DS442X	DIODE			
D111	DS442X	DIODE			
D117	WZ-050	DIODE, ZENER	5V		
D118	DS442X	DIODE			
D119	NO USE				
D120	DS442X	DIODE			
D121	DS442X	DIODE			
D124	DS442X	DIODE			
D125	DS442X	DIODE			

REF.NO	PARTS NO	NAME & DESCRIPTION			
L001	L40-1011-13	FERRI INDUCTOR			
L002	L40-1011-13	FERRI INDUCTOR			
L003	L40-1021-03	FERRI INDUCTOR			
L004	L40-1021-13	FERRI INDUCTOR			
L005	L40-1021-13	FERRI INDUCTOR			
L006	L40-1021-13	FERRI INDUCTOR			
L007	L40-1021-13	FERRI INDUCTOR			
L008	L40-4791-02	FERRI INDUCTOR			
L101	L40-1011-13	FERRI INDUCTOR			
NL001	NE-2B	NEON LAMP			
NL002	NE-2B	NEON LAMP			
P001	E40-0274-05	PIN CONNECTOR	2P		
P002	E40-0374-05	PIN CONNECTOR	3P		
P003	E40-0335-05	PIN CONNECTOR	3P		
P004	E40-0535-05	PIN CONNECTOR	5P		
P005	E40-0233-05	PIN CONNECTOR	2P		
P101	E40-1116-05	PIN CONNECTOR	11P		
P102	E40-1116-05	PIN CONNECTOR	11P		
P103	E40-0273-05	PIN CONNECTOR	2 CONTACT		
Q001	2SC2912(S)	TR. SI, NPN			
Q002	2SA1210(S)	TR. SI, PNP			
Q003	2SD613(E)	TR. SI, NPN			
Q004	2SC2785(F)	TR. SI, NPN			
Q005	2SC2271(D)	TR. SI, NPN			
Q101	2SK117(Y)	FET. N-CHANNEL			
Q102	2SK117(Y)	FET. N-CHANNEL			
Q103	2SC2785(F)	TR. SI, NPN			
Q104	2SC2785(F)	TR. SI, NPN			
Q105	2SC2785(F)	TR. SI, NPN			
Q106	2SC2785(F)	TR. SI, NPN			
Q107	2SA1175(F)	TR. SI, PNP			
Q108	2SA1175(F)	TR. SI, PNP			
Q109	2SA838(C)	TR. SI, PNP			
Q110	2SA838(C)	TR. SI, PNP			
Q111	2SA1175(F)	TR. SI, PNP			
Q112	2SA1175(F)	TR. SI, PNP			
Q113	2SC2785(F)	TR. SI, NPN			
Q114	2SC2785(F)	TR. SI, NPN			
Q115	2SK117(Y)	FET. N-CHANNEL			
Q116	2SC2785(F)	TR. SI, NPN			
Q117	2SC2785(F)	TR. SI, NPN			
Q118	2SC2785(F)	TR. SI, NPN			
Q119	2SC2785(F)	TR. SI, NPN			
Q120	2SC2785(F)	TR. SI, NPN			
Q121	2SA1175(F)	TR. SI, PNP			
Q122	2SA1175(F)	TR. SI, PNP			
Q123	2SA1175(F)	TR. SI, PNP			
Q124	2SC2912(S)	TR. SI, NPN			
Q125	2SA1210(S)	TR. SI, PNP			
Q126	2SC2785(F)	TR. SI, NPN			
Q127	2SC2912(S)	TR. SI, NPN			
Q128	2SC2785(F)	TR. SI, NPN			
Q129	2SC2785(F)	TR. SI, NPN			
Q130	2SK117(Y)	FET. N-CHANNEL			
Q131	2SA1175(F)	TR. SI, PNP			
R001	RN14BK2E4701F	RES. METAL FILM	4.7K	1%	1/4W
R002	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R003	RD14BB2E183J	RES. CARBON	18K	5%	1/4W
R004	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R005	RN14BK2E4702F	RES. METAL FILM	47K	1%	1/4W
R006	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R007	RN14BK2E3303F	RES. METAL FILM	330K	1%	1/4W
R008	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R009	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R010	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R011	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R012	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R013	R92-1033-05	RES. FIXED	33M		
R014	RD14BB2E334J	RES. CARBON	330K	5%	1/4W
R015	R92-1034-05	RES. METAL FILM	47M		
R016	R92-1031-05	RES. FIXED	4.7M		
R017	R92-0800-05	RES. FIXED	10M		
R018	RD14BB2E823J	RES. CARBON	82K	5%	1/4W
R019	RD14BB2E393J	RES. CARBON	39K	5%	1/4W
R020	RD14BB2E333J	RES. CARBON	33K	5%	1/4W
R021	RD14BB2E473J	RES. CARBON	47K	5%	1/4W
R022	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R023	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R024	RN14BK2E6800F	RES. METAL FILM	680	1%	1/4W
R025	RN14BK2E2402F	RES. METAL FILM	24K	1%	1/4W
R026	RN14BK2E1302F	RES. METAL FILM	13K	1%	1/4W
R027	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R028	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R029	RD14BB2E4R7J	RES. CARBON	4.7	5%	1/4W
R030	NO USE				
R031	RD14BB2E470J	RES. CARBON	47	5%	1/4W
R032	RD14BB2E224J	RES. CARBON	220K	5%	1/4W
R033	RD14BB2E563J	RES. CARBON	56K	5%	1/4W

REF.NO	PARTS NO	NAME & DESCRIPTION			
R101	RN14BK2E1004F	RES. METAL FILM	1M	1%	1/4W
R102	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R103	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R104	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R105	RD14BB2E152J	RES. CARBON	1.5K	5%	1/4W
R106	RD14BB2E223J	RES. CARBON	22K	5%	1/4W
R107	RN14BK2E3301F	RES. METAL FILM	3.3K	1%	1/4W
R108	RN14BK2E3300F	RES. METAL FILM	330	1%	1/4W
R109	RN14BK2E3600F	RES. METAL FILM	360	1%	1/4W
R110	RN14BK2E4701F	RES. METAL FILM	4.7K	1%	1/4W
R111	RN14BK2E5101F	RES. METAL FILM	5.1K	1%	1/4W
R112	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R113	RD14BB2E183J	RES. CARBON	18K	5%	1/4W
R114	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R115	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R116	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R117	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R118	RD14BB2E105J	RES. CARBON	1M	5%	1/4W
R119	RD14BB2E272J	RES. CARBON	2.7K	5%	1/4W
R120	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R121	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R122	RN14BK2E2701F	RES. METAL FILM	2.7K	1%	1/4W
R123	RN14BK2E3600F	RES. METAL FILM	360	1%	1/4W
R124	RN14BK2E3600F	RES. METAL FILM	360	1%	1/4W
R125	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R126	RN14BK2E1801F	RES. METAL FILM	1.8K	1%	1/4W
R127	RN14BK2E2701F	RES. METAL FILM	2.7K	1%	1/4W
R128	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R129	RD14BB2E561J	RES. CARBON	560	5%	1/4W
R130	RD14BB2E182J	RES. CARBON	1.8K	5%	1/4W
R131	RD14BB2E681J	RES. CARBON	680	5%	1/4W
R132	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R133	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R134	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R135	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R136	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R137	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R138	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R139	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R140	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R141	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R142	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R143	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R144	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R145	RD14BB2E182J	RES. CARBON	1.8K	5%	1/4W
R146	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R147	RN14BK2E3302F	RES. METAL FILM	33K	1%	1/4W
R148	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R149	RN14BK2E3602F	RES. METAL FILM	36K	1%	1/4W
R150	RS14GB3D183J	RES. METAL FILM	18K	5%	2W
R151	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R152	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R153	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R154	RD14BB2E133J	RES. CARBON	13K	5%	1/4W
R155	RD14BB2C152J	RES. CARBON	1.5K	5%	1/6W
R156	RN14BK2E1201F	RES. METAL FILM	1.2K	1%	1/4W
R157	RN14BK2E1201F	RES. METAL FILM	1.2K	1%	1/4W
R158	RN14BK2E6801F	RES. METAL FILM	6.8K	1%	1/4W
R159	RN14BK2E9101F	RES. METAL FILM	9.1K	1%	1/4W
R160	RN14BK2E3004F	RES. METAL FILM	3M	1%	1/4W
R161	RN14BK2E1004F	RES. METAL FILM	1M	1%	1/4W
R162	RN14BK2E5003F	RES. METAL FILM	500K	1%	1/4W
R163	RN14BK2E3003F	RES. METAL FILM	300K	1%	1/4W
R164	RN14BK2E1003F	RES. METAL FILM	100K	1%	1/4W
R165	RN14BK2E5002F	RES. METAL FILM	50K	1%	1/4W
R166	RN14BK2E3002F	RES. METAL FILM	30K	1%	1/4W
R167	RN14BK2E2002F	RES. METAL FILM	20K	1%	1/4W
R168	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R169	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R170	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R171	RN14BK2E4701F	RES. METAL FILM	4.7K	1%	1/4W
R172	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R173	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R174	RD14BB2E391J	RES. CARBON	390	5%	1/4W
R175	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R176	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R177	RD14BB2E182J	RES. CARBON	1.8K	5%	1/4W
R178	RD14BB2E182J	RES. CARBON	1.8K	5%	1/4W
R179	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R180	RN14BK2E9101F	RES. METAL FILM	9.1K	1%	1/4W
R181	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R182	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R183	RD14BB2E683J	RES. CARBON	68K	5%	1/4W
R184	RD14BB2E621J	RES. CARBON	620	5%	1/4W
R185	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R186	RD14BB2E473J	RES. CARBON	47K	5%	1/4W
R187	RD14BB2E183J	RES. CARBON	18K	5%	1/4W
R188	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R189	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R190	RS14GB3D103J	RES. METAL FILM	10K	5%	2W
R191	RD14BB2E683J	RES. CARBON	68K	5%	1/4W
R192	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R195	RD14BB2E821J	RES. CARBON	820	5%	1/4W
R196	RD14BB2E821J	RES. CARBON	820	5%	1/4W
R197	NO USE				
R198	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R199	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R200	RN14BK2E1004F	RES. METAL FILM	1M	1%	1/4W
R201	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R202	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R203	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R204	RD14BB2E751J	RES. CARBON	750	5%	1/4W
R205	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R206	RD14BB2E363J	RES. CARBON	36K	5%	1/4W
R207	RN14BK2E1202F	RES. METAL FILM	12K	1%	1/4W
R210	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R211	RD14BB2E470J	RES. CARBON	47	5%	1/4W
R212	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R213	NO USE				
R214	RN14BK2E3601F	RES. METAL FILM	3.6K	1%	1/4W
R217	RD14BB2E183J	RES. CARBON	18K	5%	1/4W
R221	RD14BB2E133J	RES. CARBON	13K	5%	1/4W
R222	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
S103	S02-2506-05	ROTARY SWITCH			
S104	S32-2012-05	LEVER SWITCH			
S105	S32-2012-05	LEVER SWITCH			
S106	S32-4007-05	SLIDE SWITCH			
T001	L19-0412-05	CONVERTOR TRANSFORMER			
TC101	C05-0422-05	CAP. TRIMMER	20P		
U001	NJM4558D	IC, DUAL OP-AMP			
U101	MC10103L	IC, QUAD 2-INPUT OR GATE			
U102	SN74LS112N	IC, DUAL J-K FLIP-FLOP			
U103	SN74LS02N	IC, QUAD 2-INPUT NOR GATE			
VR001	R12-5516-05	RES. SEMI FIXED	100K OHM B		
VR101	R01-3510-05	V.R. WITH SW.	10K B		
VR102	R01-3510-05	V.R. WITH SW.	10K B		
VR103	S02-2506-15	ROTARY SWITCH	WITH VR.2K,10KB		
VR104	R12-3520-05	RES. SEMI FIXED	10K OHM B		
VR105	R12-1518-05	RES. SEMI FIXED	2K B		
VR106	R12-0421-05	RES. SEMI FIXED	100 B		
VR107	R12-1517-05	RES. SEMI FIXED	1KB		
VR108	NO USE				
VR109	R12-5518-05	RES. SEMI FIXED	200K OHM B		
VR110	R12-1517-05	RES. SEMI FIXED	1KB		
VR111	R12-0540-05	RES. SEMI FIXED	500 B		

HORIZONTAL & HIGH VOLTAGE UNIT

(X74-1340-02)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	E23-0015-04	EARTH LUG			
	E23-0046-04	TERMINAL			
	E31-2170-05	JUMPING WIRE			
	E33-4028-00	WIRE ASSY			
	F01-0230-04	HEAT SINK			
	F01-0820-04	HEAT SINK			
	F01-0835-05	HEAT SINK			
	F15-0727-04	HOLDER (NEON TUBE)			
	F20-0622-05	INSULATOR			
	J25-2998-13	PCB (UNMOUNTED)			
	J31-0604-04	COLLAR			
	N19-0191-05	WASHER NONMETAL			
	N30-3008-46	SCREW, PAN HD	M 3X8		
	R92-0150-05	JUMPING RES.	ZERO OHM		
	W02-0409-05	HIGH VOLTAGE POWER BLOCK			
	002-0001-05	BRAIDED WIRE			
	212-1018-05	TUBE (PLASTIC)			
	212-3013-05	TUBE (PLASTIC)			
C001	CC45CH1H330J	CAP. CERAMIC	33P	5%	50V
C002	CC45CH2H010C	CAP. CERAMIC	1P	0.25P	500V
C003	CK45B2H472K	CAP. CERAMIC	4700P	10%	500V
C004	CE04W1H100M	CAP. ELECTRO	10	20%	50V
C005	CE04W2E100	CAP. ELECTRO	10		250V
C006	CQ93FM1H104K	CAP. MYLAR	0.1	10%	50V
C007	CQ93FM1H153K	CAP. MYLAR	0.015	10%	50V
C008	CE04W1V471M	CAP. ELECTRO	470	20%	35V
C009	CQ93FM1H104K	CAP. MYLAR	0.1	10%	50V
C010	CQ93FM1H223K	CAP. MYLAR	0.022	10%	50V
C011	CK45B2H102K	CAP. CERAMIC	1000P	10%	500V
C012	CK45E3F332P	CAP. CERAMIC	3300P		3.1K
C013	CK45E3F332P	CAP. CERAMIC	3300P		3.1K
C014	NO USE				
C015	CE04W2E010	CAP. ELECTRO	1		250V
C016	CE04W2E4R7	CAP. ELECTRO	4.7		250V
C017	CK45B2H472K	CAP. CERAMIC	4700P	10%	500V
C018	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C019	CC45FCH1H100D	CAP. CERAMIC	10P	0.5P	50V

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION			
C020	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C021	CK45B2H103K	CAP. CERAMIC	0.01	10%	500V
C022	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C023	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C024	C90-0912-05	CAP. ELECTRO	220	20%	35V
C025	C90-0912-05	CAP. ELECTRO	220	20%	35V
C026	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C027	CK45B2H472K	CAP. CERAMIC	4700P	10%	500V
C028	CE04W2A3R3M	CAP. ELECTRO	3.3	20%	100V
C029	C91-0570-05	CAP. CERAMIC	4700P		3KV
C030	CK45E3F102P	CAP. CERAMIC	1000P		3.1K
C031	CC45CH1H180J	CAP. CERAMIC	18P	5%	50V
C101	CQ93FM1H103K	CAP. MYLAR	0.01	10%	50V
C102	CQ93FM1H103K	CAP. MYLAR	0.01	10%	50V
C103	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C104	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C105	CC45CH1H221J	CAP. CERAMIC	220P	5%	50V
C106	CE04W1H100M	CAP. ELECTRO	10	20%	50V
C107	NO USE				
C108	C90-0298-05	CAP. CERAMIC	0.1	20%	12V
C109	CK45B1H472K	CAP. CERAMIC	4700P	10%	50V
C110	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C111	CC45CH1H101J	CAP. CERAMIC	100P	5%	50V
C112	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C113	CC45CH1H101J	CAP. CERAMIC	100P	5%	50V
C114	CE04BW1H010M	CAP. ELECTRO	1	20%	50V
C115	CE04W1A101M	CAP. ELECTRO	100	20%	10V
C116	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C117	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C118	CC45CH2H100D	CAP. CERAMIC	10P	0.5P	500V
C119	CC45CH2H100D	CAP. CERAMIC	10P	0.5P	500V
C120	CF93AN2A105J	CAP. POLYESTHEL	1	5%	100V
C121	CQ93BP2A103F	CAP. MYLAR	0.01	1%	100V
C122	CM93BD2A900J	CAP. MICA	90P	5%	100V
C123	CQ93FM1H102K	CAP. MYLAR	1000P	10%	50V
C124	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C125	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C126	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C127	NO USE				
C128	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C129	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C130	NO USE				
C131	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C132	NO USE				
C133	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C134	CC45FCH1H470J	CAP. CERAMIC	47P	5%	50V
C135	CC45CH2H030C	CAP. CERAMIC	3P	0.25P	500V
C136	CM93BD2A151J	CAP. MICA	150P	5%	100V
C139	CC45CH2H020C	CAP. CERAMIC	2P	0.25P	500V
C140	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C141	CK45FB1H102K	CAP. CERAMIC	1000P	10%	50V
C142	CC45CH1H221J	CAP. CERAMIC	220P	5%	50V
C143	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C144	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C145	C90-0298-05	CAP. CERAMIC	0.1	20%	12V
C146	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C147	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C148	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C149	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C150	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C151	CE04W1A221M	CAP. ELECTRO	220	20%	10V
C152	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C153	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C154	CE04W2E4R7	CAP. ELECTRO	4.7		250V
C155	CK45B2H472K	CAP. CERAMIC	4700P	10%	500V
C158	CC45FCH1H150J	CAP. CERAMIC	15P	5%	50V
C159	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C160	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C161	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C162	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C163	CC45FCH1H100D	CAP. CERAMIC	10P	0.5P	50V
C164	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C165	CC45CH1H151J	CAP. CERAMIC	150P	5%	50V
C166	NO USE				
C167	CC45CH1H221J	CAP. CERAMIC	220P	5%	50V
C168	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C169	CC45FCH1H050C	CAP. CERAMIC	5P	0.25P	50V
C173	C90-0298-05	CAP. CERAMIC	0.1	20%	12V
C174	C90-0298-05	CAP. CERAMIC	0.1	20%	12V
C175	NO USE				
C176	CK45B1H152K	CAP. CERAMIC	1500P	10%	50V
D001	DS442X	DIODE, SILICON	SWITCHING		
D002	DS442X	DIODE, SILICON	SWITCHING		
D003	NO USE				
D004	W06C	DIODE, SILICON	RECTIFIER		
D005	W06C	DIODE, SILICON	RECTIFIER		
D006	1SS83	DIODE, SILICON	SWITCHING		
D007	1SS83	DIODE, SILICON	SWITCHING		
D008	DS442X	DIODE, SILICON	SWITCHING		
D009	DS442X	DIODE, SILICON	SWITCHING		
D101	DS442X	DIODE, SILICON	SWITCHING		
D102	NO USE				

REF.NO	PARTS NO	NAME & DESCRIPTION			
D103	DS442X	DIODE, SILICON	SWITCHING		
D104	DS442X	DIODE, SILICON	SWITCHING		
D105	DS442X	DIODE, SILICON	SWITCHING		
D106	DS442X	DIODE, SILICON	SWITCHING		
D107	DS442X	DIODE, SILICON	SWITCHING		
D108	DS442X	DIODE, SILICON	SWITCHING		
D109	DS442X	DIODE, SILICON	SWITCHING		
D110	DS442X	DIODE, SILICON	SWITCHING		
D111	DS442X	DIODE, SILICON	SWITCHING		
D112	DS442X	DIODE			
D113	DS442X	DIODE			
D114	NO USE				
D115	DS442X	DIODE			
D116	1SS83	DIODE, SILICON	SWITCHING		
D117	MTZ5.1JB	DIODE, ZENER	5V		
D121	DS442X	DIODE, SILICON	SWITCHING		
D122	NO USE				
D123	1SS83	DIODE, SILICON	SWITCHING		
D124	DS442X	DIODE			
D125	DS442X	DIODE			
L001	L40-1011-13	FERRI INDUCTOR	100UH		
L002	L40-1011-13	FERRI INDUCTOR	100UH		
L003	L40-1021-03	FERRI INDUCTOR			
L004	L40-1021-13	FERRI INDUCTOR			
L005	L40-1021-13	FERRI INDUCTOR			
L006	L40-1021-13	FERRI INDUCTOR			
L007	L40-1021-13	FERRI INDUCTOR			
L008	L40-4791-02	FERRI INDUCTOR	4.7UH		
L101	L40-1011-13	FERRI INDUCTOR	100UH		
NL001	NE-2B	NEON LAMP			
NL002	NE-2B	NEON LAMP			
P001	E40-0274-05	PIN CONNECTOR	2 P		
P002	E40-0374-05	PIN CONNECTOR	3P		
P003	E40-0335-05	PIN CONNECTOR	3P		
P004	E40-0535-05	PIN CONNECTOR	5P		
P005	E40-0233-05	PIN CONNECTOR	2P		
P101	E40-1116-05	PIN CONNECTOR	11P		
P102	E40-1116-05	PIN CONNECTOR	11P		
P103	E40-0273-05	PIN CONNECTOR	2 P		
Q001	2SC2912(S)	TR. SI, NPN			
Q002	2SA1210(S)	TR. SI, PNP			
Q003	2SD613(E)	TR. SI, NPN			
Q004	2SC2785(F)	TR. SI, NPN			
Q005	2SC2271(D)	TR. SI, NPN			
Q101	2SK117(Y)	FET. N-CHANNEL			
Q102	2SK117(Y)	FET. N-CHANNEL			
Q103	2SC2785(F)	TR. SI, NPN			
Q104	2SC2785(F)	TR. SI, NPN			
Q105	2SC2785(F)	TR. SI, NPN			
Q106	2SC2785(F)	TR. SI, NPN			
Q107	2SA1175(F)	TR. SI, PNP			
Q108	2SA1175(F)	TR. SI, PNP			
Q109	2SA1175(F)	TR. SI, PNP			
Q110	2SA1175(F)	TR. SI, PNP			
Q111	2SA1175(F)	TR. SI, PNP			
Q112	2SA1175(F)	TR. SI, PNP			
Q113	2SC2785(F)	TR. SI, NPN			
Q114	2SC2785(F)	TR. SI, NPN			
Q115	2SK117(Y)	FET. N-CHANNEL			
Q116	2SC2785(F)	TR. SI, NPN			
Q117	2SC2785(F)	TR. SI, NPN			
Q118	2SC2785(F)	TR. SI, NPN			
Q119	2SC2785(F)	TR. SI, NPN			
Q120	2SC2785(F)	TR. SI, NPN			
Q121	2SA1175(F)	TR. SI, PNP			
Q122	2SA1175(F)	TR. SI, PNP			
Q123	2SA1175(F)	TR. SI, PNP			
Q124	2SC2912(S)	TR. SI, NPN			
Q125	2SA1210(S)	TR. SI, PNP			
Q126	2SC2785(F)	TR. SI, NPN			
Q127	2SC2912(S)	TR. SI, NPN			
Q128	2SC2785(F)	TR. SI, NPN			
Q129	2SC2785(F)	TR. SI, NPN			
R001	RN14BK2E4701F	RES. METAL FILM	4.7K	1%	1/4W
R002	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R003	RD14BB2E183J	RES. CARBON	18K	5%	1/4W
R004	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R005	RN14BK2E4702F	RES. METAL FILM	47K	1%	1/4W
R006	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R007	RN14BK2E2403F	RES. METAL FILM	240K	1%	1/4W
R008	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R009	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R010	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R011	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R012	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R013	R92-1033-05	RES. FIXED	33M		
R014	RD14BB2E334J	RES. CARBON	330K	5%	1/4W
R015	R92-1034-05	RES. METAL FILM	47M		

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION			
R016	R92-1026-05	RES. METAL FILM	3.3M		
R017	R92-1032-05	RES. FIXED	22M		
R018	RD14BB2E473J	RES. CARBON	47K	5%	1/4W
R019	RD14BB2E393J	RES. CARBON	39K	5%	1/4W
R020	RD14BB2E333J	RES. CARBON	33K	5%	1/4W
R021	RD14BB2E473J	RES. CARBON	47K	5%	1/4W
R022	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R023	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R024	RN14BK2E6800F	RES. METAL FILM	680	1%	1/4W
R025	RN14BK2E2402F	RES. METAL FILM	24K	1%	1/4W
R026	RN14BK2E1302F	RES. METAL FILM	13K	1%	1/4W
R027	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R028	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R029	RD14BB2E4R7J	RES. CARBON	4.7	5%	1/4W
R030	NO USE				
R031	RD14BB2E470J	RES. CARBON	47	5%	1/4W
R032	RD14BB2E224J	RES. CARBON	220K	5%	1/4W
R033	RD14BB2E563J	RES. CARBON	56K	5%	1/4W
R101	RN14BK2E1004F	RES. METAL FILM	1M	1%	1/4W
R102	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R103	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R104	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R105	RD14BB2E201J	RES. CARBON	200	5%	1/4W
R106	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R107	RN14BK2E3301F	RES. METAL FILM	3.3K	1%	1/4W
R108	RN14BK2E3300F	RES. METAL FILM	330	1%	1/4W
R109	RN14BK2E3600F	RES. METAL FILM	360	1%	1/4W
R110	RN14BK2E4701F	RES. METAL FILM	4.7K	1%	1/4W
R111	RN14BK2E5101F	RES. METAL FILM	5.1K	1%	1/4W
R112	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R113	RD14BB2E183J	RES. CARBON	18K	5%	1/4W
R114	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R115	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R116	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R117	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R118	RD14BB2E105J	RES. CARBON	1M	5%	1/4W
R119	RD14BB2E622J	RES. CARBON	6.2K	5%	1/4W
R120	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R121	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R122	RN14BK2E2701F	RES. METAL FILM	2.7K	1%	1/4W
R123	RN14BK2E3600F	RES. METAL FILM	360	1%	1/4W
R124	RN14BK2E3600F	RES. METAL FILM	360	1%	1/4W
R125	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R126	RN14BK2E1002F	RES. METAL FILM	10K	1%	1/4W
R127	RN14BK2E2701F	RES. METAL FILM	2.7K	1%	1/4W
R128	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R129	RD14BB2E561J	RES. CARBON	560	5%	1/4W
R130	RD14BB2E182J	RES. CARBON	1.8K	5%	1/4W
R131	RD14BB2E681J	RES. CARBON	680	5%	1/4W
R132	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R133	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R134	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R135	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R136	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R137	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R138	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R139	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R140	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R141	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R142	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R143	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R144	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R145	RD14BB2E182J	RES. CARBON	1.8K	5%	1/4W
R146	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R147	RN14BK2E3302F	RES. METAL FILM	33K	1%	1/4W
R148	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R149	RN14BK2E3602F	RES. METAL FILM	36K	1%	1/4W
R150	RS14GB3D183J	RES. METAL FILM	18K	5%	2W
R151	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R152	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R153	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R154	RD14BB2E133J	RES. CARBON	13K	5%	1/4W
R155	RD14BB2C132J	RES. CARBON	1.3K	5%	1/6W
R156	RN14BK2E1201F	RES. METAL FILM	1.2K	1%	1/4W
R157	RN14BK2E1201F	RES. METAL FILM	1.2K	1%	1/4W
R158	RN14BK2E4301F	RES. METAL FILM	4.3K	1%	1/4W
R159	RN14BK2E9101F	RES. METAL FILM	9.1K	1%	1/4W
R160	RN14BK2E3004F	RES. METAL FILM	3M	1%	1/4W
R161	RN14BK2E1004F	RES. METAL FILM	1M	1%	1/4W
R162	RN14BK2E5003F	RES. METAL FILM	500K	1%	1/4W
R163	RN14BK2E3003F	RES. METAL FILM	300K	1%	1/4W
R164	RN14BK2E1003F	RES. METAL FILM	100K	1%	1/4W
R165	RN14BK2E5002F	RES. METAL FILM	50K	1%	1/4W
R166	RN14BK2E3002F	RES. METAL FILM	30K	1%	1/4W
R167	RN14BK2E2002F	RES. METAL FILM	20K	1%	1/4W
R168	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R169	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R170	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R171	RN14BK2E4701F	RES. METAL FILM	4.7K	1%	1/4W
R172	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R173	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R174	RD14BB2E391J	RES. CARBON	390	5%	1/4W
R175	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R176	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R177	RD14BB2E182J	RES. CARBON	1.8K	5%	1/4W
R178	RD14BB2E182J	RES. CARBON	1.8K	5%	1/4W

REF.NO	PARTS NO	NAME & DESCRIPTION			
R179	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R180	RN14BK2E1202F	RES. METAL FILM	12K	1%	1/4W
R181	RD14BB2E822J	RES. CARBON	8.2K	5%	1/4W
R182	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R183	RD14BB2E124J	RES. CARBON	120K	5%	1/4W
R184	RD14BB2E621J	RES. CARBON	620	5%	1/4W
R185	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R186	RD14BB2E473J	RES. CARBON	47K	5%	1/4W
R187	RD14BB2E203J	RES. CARBON	20K	5%	1/4W
R188	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R189	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R190	RS14GB3D103J	RES. METAL FILM	10K	5%	2W
R191	RD14BB2E124J	RES. CARBON	120K	5%	1/4W
R192	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R193	RD14BB2E122J	RES. CARBON	1.2K	5%	1/4W
R194	RD14BB2E122J	RES. CARBON	1.2K	5%	1/4W
R195	RD14BB2E821J	RES. CARBON	820	5%	1/4W
R196	RD14BB2E821J	RES. CARBON	820	5%	1/4W
R197	NO USE				
R198	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R199	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R205	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R206	NO USE				
R207	RN14BK2E9101F	RES. METAL FILM	9.1K	1%	1/4W
R210	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R211	RD14BB2E470J	RES. CARBON	47	5%	1/4W
R212	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R213	RD14BB2E152J	RES. CARBON	1.5K	5%	1/4W
R214	RN14BK2E5101F	RES. METAL FILM	5.1K	1%	1/4W
R217	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R221	RD14BB2E133J	RES. CARBON	13K	5%	1/4W
R222	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R223	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R224	NO USE				
R225	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R226	NO USE				
R227	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R228	RD14BB2C133J	RES. CARBON	13K	5%	1/6W
S101	R01-3510-05	V.R. WITH SW.	10K B		
S102	R01-3510-05	V.R. WITH SW.	10K B		
S103	S02-2507-15	ROTARY SWITCH	WITH VR.2KB		
S104	S33-2501-05	LEVER SWITCH			
S105	S32-2012-05	LEVER SWITCH			
S106	S32-4007-05	SLIDE SWITCH			
T001	L19-0413-05	CONVERTOR TRANSFORMER			
TC101	C05-0422-05	CAP. TRIMMER	20P		
TC102	C05-0420-05	CAP. TRIMMER	6P		
U001	NJM4558D	IC			
U101	MC10103L	IC, QUAD 2-INPUT OR GATE			
U102	SN74LS112N	IC			
U103	SN74LS02N	IC, QUAD 2-INPUT NOR GATE			
U104	SN74LS00N	IC			
U105	SN74LS08N	IC, QUAD 2-INPUT AND GATE			
VR001	R12-5516-05	RES. SEMI FIXED	100K B		
VR101	R01-3510-05	V.R. WITH SW.	10K B		
VR102	R01-3510-05	V.R. WITH SW.	10K B		
VR103	S02-2507-15	ROTARY SWITCH	WITH VR.2KB		
VR104	R12-3520-05	RES. SEMI FIXED	10K B		
VR105	R12-1518-05	RES. SEMI FIXED	2K B		
VR106	R12-0421-05	RES. SEMI FIXED	100 B		
VR107	R12-1517-05	RES. SEMI FIXED	1K B		
VR108	NO USE				
VR109	R12-5518-05	RES. SEMI FIXED	200K OHM B		
VR110	NO USE				
VR111	R12-0540-05	RES. SEMI FIXED	500 B		

HORIZONTAL & HIGH VOLTAGE UNIT

(X74-1340-03)

REF.NO	PARTS NO	NAME & DESCRIPTION
	E23-0015-04	EARTH LUG
	E23-0046-04	TERMINAL
	E31-2170-05	JUMPING WIRE
	E33-4029-00	WIRE ASSY
	F01-0230-04	HEAT SINK
	F01-0820-04	HEAT SINK
	F01-0835-05	HEAT SINK
	F15-0727-04	HOLDER (NEON TUBE)
	F20-0622-05	INSULATOR
	J25-2998-13	PCB (UNMOUNTED)
	J31-0604-04	COLLAR
	N19-0191-05	WASHER NONMETAL
	N30-3008-46	SCREW, PAN HD M 3X8

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION			
	R92-0150-05	JUMPING RES.	ZERO OHM		
	W02-0409-05	HIGH VOLTAGE POWER BLOCK			
	002-0001-05	BRAIDED WIRE			
	212-1018-05	TUBE (PLASTIC)			
	212-3013-05	TUBE (PLASTIC)			
C001	CC45CH1H330J	CAP. CERAMIC	33P	5%	50V
C002	CC45CH2H010C	CAP. CERAMIC	1P	0.25P	500V
C003	CK45B2H472K	CAP. CERAMIC	4700P	10%	500V
C004	CE04W1H100M	CAP. ELECTRO	10	20%	50V
C005	CE04W2E100	CAP. ELECTRO	10		250V
C006	CQ93FM1H104K	CAP. MYLAR	0.1	10%	50V
C007	CQ93FM1H153K	CAP. MYLAR	0.015	10%	50V
C008	CE04W1V471M	CAP. ELECTRO	470	20%	35V
C009	CQ93FM1H104K	CAP. MYLAR	0.1	10%	50V
C010	CQ93FM1H223K	CAP. MYLAR	0.022	10%	50V
C011	CK45B2H102K	CAP. CERAMIC	1000P	10%	500V
C012	CK45E3F332P	CAP. CERAMIC	3300P		3.1K
C013	CK45E3F332P	CAP. CERAMIC	3300P		3.1K
C014	NO USE				
C015	CE04W2E010	CAP. ELECTRO	1		250V
C016	CE04W2E4R7	CAP. ELECTRO	4.7		250V
C017	CK45B2H472K	CAP. CERAMIC	4700P	10%	500V
C018	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C019	CC45FCH1H100D	CAP. CERAMIC	10P	0.5P	50V
C020	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C021	CK45B2H103K	CAP. CERAMIC	0.01	10%	500V
C022	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C023	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C024	C90-0912-05	CAP. ELECTRO	220	20%	35V
C025	C90-0912-05	CAP. ELECTRO	220	20%	35V
C026	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C027	CK45B2H472K	CAP. CERAMIC	4700P	10%	500V
C028	CE04W2A3R3M	CAP. ELECTRO	3.3	20%	100V
C029	C91-0570-05	CAP. CERAMIC	4700P		3KV
C030	CK45E3F102P	CAP. CERAMIC	1000P		3.1K
C031	CC45CH1H180J	CAP. CERAMIC	18P	5%	50V
C101	CQ93FM1H103K	CAP. MYLAR	0.01	10%	50V
C102	CQ93FM1H103K	CAP. MYLAR	0.01	10%	50V
C103	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C104	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C105	CC45CH1H221J	CAP. CERAMIC	220P	5%	50V
C106	CE04W1H100M	CAP. ELECTRO	10	20%	50V
C107	NO USE				
C108	C90-0298-05	CAP. CERAMIC	0.1	20%	12V
C109	CK45B1H472K	CAP. CERAMIC	4700P	10%	50V
C110	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C111	CC45CH1H101J	CAP. CERAMIC	100P	5%	50V
C112	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C113	CC45CH1H101J	CAP. CERAMIC	100P	5%	50V
C114	CE04BW1H010M	CAP. ELECTRO	1	20%	50V
C115	CE04W1A101M	CAP. ELECTRO	100	20%	10V
C116	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C117	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C118	CC45CH2H100D	CAP. CERAMIC	10P	0.5P	500V
C119	CC45CH2H100D	CAP. CERAMIC	10P	0.5P	500V
C120	CF93AN2A105J	CAP. POLYESTHEL	1	5%	100V
C121	CQ93BP2A103F	CAP. MYLAR	0.01	1%	100V
C122	CM93BD2A900J	CAP. MICA	90P	5%	100V
C123	CQ93FM1H102K	CAP. MYLAR	1000P	10%	50V
C124	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C125	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C126	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C127	NO USE				
C128	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C129	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C130	NO USE				
C131	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C132	NO USE				
C133	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C134	CC45FCH1H470J	CAP. CERAMIC	47P	5%	50V
C135	CC45CH2H030C	CAP. CERAMIC	3P	0.25P	500V
C136	CM93BD2A151J	CAP. MICA	150P	5%	100V
C139	CC45CH2H020C	CAP. CERAMIC	2P	0.25P	500V
C140	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C143	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C144	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C145	C90-0298-05	CAP. CERAMIC	0.1	20%	12V
C146	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C147	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C148	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C149	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C150	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C151	CE04W1A221M	CAP. ELECTRO	220	20%	10V
C152	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C153	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C154	CE04W2E4R7	CAP. ELECTRO	4.7		250V
C155	CK45B2H472K	CAP. CERAMIC	4700P	10%	500V
C156	NO USE				
C157	CQ93FM1H103K	CAP. MYLAR	0.01	10%	50V
C158	CC45FCH1H150J	CAP. CERAMIC	15P	5%	50V
C159	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C160	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C161	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C162	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C163	CC45FCH1H100D	CAP. CERAMIC	10P	0.5P	50V
C164	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C165	CC45CH1H151J	CAP. CERAMIC	150P	5%	50V
C166	CC45FCH1H100D	CAP. CERAMIC	10P	0.5P	50V
C167	CC45CH1H221J	CAP. CERAMIC	220P	5%	50V
C168	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C169	CC45FCH1H050C	CAP. CERAMIC	5P	0.25P	50V
C173	C90-0298-05	CAP. CERAMIC	0.1	20%	12V
C174	C90-0298-05	CAP. CERAMIC	0.1	20%	12V
C175	NO USE				
C176	CK45B1H152K	CAP. CERAMIC	1500P	10%	50V
D001	DS442X	DIODE, SILICON	SWITCHING		
D002	DS442X	DIODE, SILICON	SWITCHING		
D003	NO USE				
D004	W06C	DIODE, SILICON	RECTIFIER		
D005	W06C	DIODE, SILICON	RECTIFIER		
D006	1SS83	DIODE, SILICON	SWITCHING		
D007	1SS83	DIODE, SILICON	SWITCHING		
D008	DS442X	DIODE, SILICON	SWITCHING		
D009	DS442X	DIODE, SILICON	SWITCHING		
D101	DS442X	DIODE, SILICON	SWITCHING		
D102	NO USE				
D103	DS442X	DIODE, SILICON	SWITCHING		
D104	DS442X	DIODE, SILICON	SWITCHING		
D105	DS442X	DIODE, SILICON	SWITCHING		
D106	DS442X	DIODE, SILICON	SWITCHING		
D107	DS442X	DIODE, SILICON	SWITCHING		
D108	DS442X	DIODE, SILICON	SWITCHING		
D109	DS442X	DIODE, SILICON	SWITCHING		
D110	DS442X	DIODE, SILICON	SWITCHING		
D111	DS442X	DIODE, SILICON	SWITCHING		
D116	1SS83	DIODE, SILICON	SWITCHING		
D117	MTZ5.1JB	DIODE, ZENER	5V		
D118	DS442X	DIODE			
D119	NO USE				
D120	DS442X	DIODE			
D121	DS442X	DIODE, SILICON	SWITCHING		
D122	NO USE				
D123	1SS83	DIODE, SILICON	SWITCHING		
D124	DS442X	DIODE			
D125	DS442X	DIODE			
L001	L40-1011-13	FERRI INDUCTOR	100UH		
L002	L40-1011-13	FERRI INDUCTOR	100UH		
L003	L40-1021-03	FERRI INDUCTOR			
L004	L40-1021-13	FERRI INDUCTOR			
L005	L40-1021-13	FERRI INDUCTOR			
L006	L40-1021-13	FERRI INDUCTOR			
L007	L40-1021-13	FERRI INDUCTOR			
L008	L40-4791-02	FERRI INDUCTOR	4.7UH		
L101	L40-1011-13	FERRI INDUCTOR	100UH		
NL001	NE-2B	NEON LAMP			
NL002	NE-2B	NEON LAMP			
P001	E40-0274-05	PIN CONNECTOR	2 P		
P002	E40-0374-05	PIN CONNECTOR	3P		
P003	E40-0335-05	PIN CONNECTOR	3P		
P004	E40-0535-05	PIN CONNECTOR	5P		
P005	E40-0233-05	PIN CONNECTOR	2P		
P101	E40-1116-05	PIN CONNECTOR	11P		
P102	E40-1116-05	PIN CONNECTOR	11P		
P103	E40-0273-05	PIN CONNECTOR	2 P		
Q001	2SC2912(S)	TR. SI, NPN			
Q002	2SA1210(S)	TR. SI, PNP			
Q003	2SD613(E)	TR. SI, NPN			
Q004	2SC2785(F)	TR. SI, NPN			
Q005	2SC2271(D)	TR. SI, NPN			
Q101	2SK117(Y)	FET. N-CHANNEL			
Q102	2SK117(Y)	FET. N-CHANNEL			
Q103	2SC2785(F)	TR. SI, NPN			
Q104	2SC2785(F)	TR. SI, NPN			
Q105	2SC2785(F)	TR. SI, NPN			
Q106	2SC2785(F)	TR. SI, NPN			
Q107	2SA1175(F)	TR. SI, PNP			
Q108	2SA1175(F)	TR. SI, PNP			
Q109	2SA1175(F)	TR. SI, PNP			
Q110	2SA1175(F)	TR. SI, PNP			
Q111	2SA1175(F)	TR. SI, PNP			
Q112	2SA1175(F)	TR. SI, PNP			
Q113	2SC2785(F)	TR. SI, NPN			
Q114	2SC2785(F)	TR. SI, NPN			
Q115	2SK117(Y)	FET. N-CHANNEL			
Q116	2SC2785(F)	TR. SI, NPN			
Q117	2SC2785(F)	TR. SI, NPN			
Q118	2SC2785(F)	TR. SI, NPN			
Q119	2SC2785(F)	TR. SI, NPN			
Q120	2SC2785(F)	TR. SI, NPN			
Q121	2SA1175(F)	TR. SI, PNP			

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION
Q122	2SA1175(F)	TR. SI, PNP
Q123	2SA1175(F)	TR. SI, PNP
Q124	2SC2912(S)	TR. SI, NPN
Q125	2SA1210(S)	TR. SI, PNP
Q126	2SC2785(F)	TR. SI, NPN
Q127	2SC2912(S)	TR. SI, NPN
Q128	2SC2785(F)	TR. SI, NPN
Q129	2SC2785(F)	TR. SI, NPN
Q130	2SK117(Y)	FET. N-CHANNEL
Q131	2SA1175(F)	TR. SI, PNP
R001	RN14BK2E4701F	RES. METAL FILM 4.7K 1% 1/4W
R002	RD14BB2E221J	RES. CARBON 220 5% 1/4W
R003	RD14BB2E183J	RES. CARBON 18K 5% 1/4W
R004	RD14BB2E104J	RES. CARBON 100K 5% 1/4W
R005	RN14BK2E4702F	RES. METAL FILM 47K 1% 1/4W
R006	RD14BB2E101J	RES. CARBON 100 5% 1/4W
R007	RN14BK2E2403F	RES. METAL FILM 240K 1% 1/4W
R008	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R009	RD14BB2E104J	RES. CARBON 100K 5% 1/4W
R010	RD14BB2E332J	RES. CARBON 3.3K 5% 1/4W
R011	RD14BB2E221J	RES. CARBON 220 5% 1/4W
R012	RD14BB2E103J	RES. CARBON 10K 5% 1/4W
R013	R92-1033-05	RES. FIXED 33M
R014	RD14BB2E334J	RES. CARBON 330K 5% 1/4W
R015	R92-1034-05	RES. METAL FILM 47M
R016	R92-1026-05	RES. METAL FILM 3.3M
R017	R92-1032-05	RES. FIXED 22M
R018	RD14BB2E473J	RES. CARBON 47K 5% 1/4W
R019	RD14BB2E393J	RES. CARBON 39K 5% 1/4W
R020	RD14BB2E333J	RES. CARBON 33K 5% 1/4W
R021	RD14BB2E473J	RES. CARBON 47K 5% 1/4W
R022	RD14BB2E103J	RES. CARBON 10K 5% 1/4W
R023	RD14BB2E222J	RES. CARBON 2.2K 5% 1/4W
R024	RN14BK2E6800F	RES. METAL FILM 680 1% 1/4W
R025	RN14BK2E2402F	RES. METAL FILM 24K 1% 1/4W
R026	RN14BK2E1302F	RES. METAL FILM 13K 1% 1/4W
R027	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R028	RD14BB2E562J	RES. CARBON 5.6K 5% 1/4W
R029	RD14BB2E4R7J	RES. CARBON 4.7 5% 1/4W
R030	NO USE	
R031	RD14BB2E470J	RES. CARBON 47 5% 1/4W
R032	RD14BB2E224J	RES. CARBON 220K 5% 1/4W
R033	RD14BB2E563J	RES. CARBON 56K 5% 1/4W
R101	RN14BK2E1004F	RES. METAL FILM 1M 1% 1/4W
R102	RD14BB2E104J	RES. CARBON 100K 5% 1/4W
R103	RD14BB2E153J	RES. CARBON 15K 5% 1/4W
R104	RD14BB2E153J	RES. CARBON 15K 5% 1/4W
R105	RD14BB2E201J	RES. CARBON 200 5% 1/4W
R106	RD14BB2E302J	RES. CARBON 3K 5% 1/4W
R107	RN14BK2E3301F	RES. METAL FILM 3.3K 1% 1/4W
R108	RN14BK2E3300F	RES. METAL FILM 330 1% 1/4W
R109	RN14BK2E3600F	RES. METAL FILM 360 1% 1/4W
R110	RN14BK2E4701F	RES. METAL FILM 4.7K 1% 1/4W
R111	RN14BK2E5101F	RES. METAL FILM 5.1K 1% 1/4W
R112	RD14BB2E103J	RES. CARBON 10K 5% 1/4W
R113	RD14BB2E183J	RES. CARBON 18K 5% 1/4W
R114	RD14BB2E222J	RES. CARBON 2.2K 5% 1/4W
R115	RD14BB2E222J	RES. CARBON 2.2K 5% 1/4W
R116	RD14BB2E222J	RES. CARB0N 2.2K 5% 1/4W
R117	RD14BB2E472J	RES. CARBON 4.7K 5% 1/4W
R118	RD14BB2E105J	RES. CARBON 1M 5% 1/4W
R119	RD14BB2E622J	RES. CARBON 6.2K 5% 1/4W
R120	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R121	RD14BB2E472J	RES. CARBON 4.7K 5% 1/4W
R122	RN14BK2E2701F	RES. METAL FILM 2.7K 1% 1/4W
R123	RN14BK2E3600F	RES. METAL FILM 360 1% 1/4W
R124	RN14BK2E3600F	RES. METAL FILM 360 1% 1/4W
R125	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R126	RN14BK2E1002F	RES. METAL FILM 10K 1% 1/4W
R127	RN14BK2E2701F	RES. METAL FILM 2.7K 1% 1/4W
R128	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R129	RD14BB2E561J	RES. CARBON 560 5% 1/4W
R130	RD14BB2E182J	RES. CARBON 1.8K 5% 1/4W
R131	RD14BB2E681J	RES. CARBON 680 5% 1/4W
R132	RD14BB2E472J	RES. CARBON 4.7K 5% 1/4W
R133	RD14BB2E222J	RES. CARBON 2.2K 5% 1/4W
R134	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R135	RD14BB2E472J	RES. CARBON 4.7K 5% 1/4W
R136	RD14BB2E222J	RES. CARBON 2.2K 5% 1/4W
R137	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R138	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R139	RD14BB2E562J	RES. CARBON 5.6K 5% 1/4W
R140	RD14BB2E221J	RES. CARBON 220 5% 1/4W
R141	RD14BB2E221J	RES. CARBON 220 5% 1/4W
R142	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R143	RD14BB2E472J	RES. CARBON 4.7K 5% 1/4W
R144	RD14BB2E103J	RES. CARBON 10K 5% 1/4W
R145	RD14BB2E182J	RES. CARBON 1.8K 5% 1/4W
R146	RD14BB2E472J	RES. CARBON 4.7K 5% 1/4W
R147	RN14BK2E3302F	RES. METAL FILM 33K 1% 1/4W
R148	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R149	RN14BK2E3602F	RES. METAL FILM 36K 1% 1/4W
R150	RS14GB3D183J	RES. METAL FILM 18K 5% 2W
R151	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R152	RD14BB2E153J	RES. CARBON 15K 5% 1/4W

REF.NO	PARTS NO	NAME & DESCRIPTION
R153	RD14BB2E153J	RES. CARBON 15K 5% 1/4W
R154	RD14BB2E133J	RES. CARBON 13K 5% 1/4W
R155	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R156	RN14BK2E1201F	RES. METAL FILM 1.2K 1% 1/4W
R157	RN14BK2E1201F	RES. METAL FILM 1.2K 1% 1/4W
R158	RN14BK2E6801F	RES. METAL FILM 6.8K 1% 1/4W
R159	RN14BK2E9101F	RES. METAL FILM 9.1K 1% 1/4W
R160	RN14BK2E3004F	RES. METAL FILM 3M 1% 1/4W
R161	RN14BK2E1004F	RES. METAL FILM 1M 1% 1/4W
R162	RN14BK2E5003F	RES. METAL FILM 500K 1% 1/4W
R163	RN14BK2E3003F	RES. METAL FILM 300K 1% 1/4W
R164	RN14BK2E1003F	RES. METAL FILM 100K 1% 1/4W
R165	RN14BK2E5002F	RES. METAL FILM 50K 1% 1/4W
R166	RN14BK2E3002F	RES. METAL FILM 30K 1% 1/4W
R167	RN14BK2E2002F	RES. METAL FILM 20K 1% 1/4W
R168	RD14BB2E472J	RES. CARBON 4.7K 5% 1/4W
R169	RD14BB2E222J	RES. CARBON 2.2K 5% 1/4W
R170	RD14BB2E472J	RES. CARBON 4.7K 5% 1/4W
R171	RN14BK2E4701F	RES. METAL FILM 4.7K 1% 1/4W
R172	RD14BB2E472J	RES. CARBON 4.7K 5% 1/4W
R173	RD14BB2E101J	RES. CARBON 100 5% 1/4W
R174	RD14BB2E391J	RES. CARBON 390 5% 1/4W
R175	RN14BK2E2201F	RES. METAL FILM 2.2K 1% 1/4W
R176	RN14BK2E2201F	RES. METAL FILM 2.2K 1% 1/4W
R177	RD14BB2E182J	RES. CARBON 1.8K 5% 1/4W
R178	RD14BB2E182J	RES. CARBON 1.8K 5% 1/4W
R179	RD14BB2E103J	RES. CARBON 10K 5% 1/4W
R180	RN14BK2E1202F	RES. METAL FILM 12K 1% 1/4W
R181	RD14BB2E822J	RES. CARBON 8.2K 5% 1/4W
R182	RD14BB2E103J	RES. CARBON 10K 5% 1/4W
R183	RD14BB2E124J	RES. CARBON 120K 5% 1/4W
R184	RD14BB2E621J	RES. CARBON 620 5% 1/4W
R185	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R186	RD14BB2E473J	RES. CARBON 47K 5% 1/4W
R187	RD14BB2E203J	RES. CARBON 20K 5% 1/4W
R188	RD14BB2E103J	RES. CARBON 10K 5% 1/4W
R189	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R190	RS14GB3D103J	RES. METAL FILM 10K 5% 2W
R191	RD14BB2E124J	RES. CARBON 120K 5% 1/4W
R192	RD14BB2E103J	RES. CARBON 10K 5% 1/4W
R195	RD14BB2E821J	RES. CARBON 820 5% 1/4W
R196	RD14BB2E821J	RES. CARBON 820 5% 1/4W
R197	NO USE	
R198	RD14BB2E222J	RES. CARBON 2.2K 5% 1/4W
R199	RD14BB2E221J	RES. CARBON 220 5% 1/4W
R200	RN14BK2E1004F	RES. METAL FILM 1M 1% 1/4W
R201	RD14BB2E104J	RES. CARBON 100K 5% 1/4W
R202	RD14BB2E153J	RES. CARBON 15K 5% 1/4W
R203	RD14BB2E472J	RES. CARBON 4.7K 5% 1/4W
R204	RD14BB2E751J	RES. CARBON 750 5% 1/4W
R205	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R206	NO USE	
R207	RN14BK2E9101F	RES. METAL FILM 9.1K 1% 1/4W
R210	RD14BB2E101J	RES. CARBON 100 5% 1/4W
R211	RD14BB2E470J	RES. CARBON 47 5% 1/4W
R212	RD14BB2E101J	RES. CARBON 100 5% 1/4W
R213	RD14BB2E152J	RES. CARBON 1.5K 5% 1/4W
R214	RN14BK2E5101F	RES. METAL FILM 5.1K 1% 1/4W
R217	RD14BB2E562J	RES. CARBON 5.6K 5% 1/4W
R221	RD14BB2E133J	RES. CARBON 13K 5% 1/4W
R222	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R223	NO USE	
R224	RD14BB2E103J	RES. CARBON 10K 5% 1/4W
R227	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R228	RD14BB2C133J	RES. CARBON 13K 5% 1/6W
S101	R01-3510-05	V.R. WITH SW. 10K B
S102	R01-3510-05	V.R. WITH SW. 10K B
S103	S02-2508-15	ROTARY SWITCH WITH VR.2K,10KB
S104	S32-2012-05	LEVER SWITCH
S105	S32-2012-05	LEVER SWITCH
S106	S32-4007-05	SLIDE SWITCH
T001	L19-0413-05	CONVERTOR TRANSFORMER
TC101	C05-0422-05	CAP. TRIMMER 20P
TC102	C05-0420-05	CAP. TRIMMER 6P
U001	NJM4558D	IC
U101	MC10103L	IC, QUAD 2-INPUT OR GATE
U102	SN74LS112N	IC
U103	SN74LS02N	IC, QUAD 2-INPUT NOR GATE
VR001	R12-5516-05	RES. SEMI FIXED 100K B
VR101	R01-3510-05	V.R. WITH SW. 10K B
VR102	R01-3510-05	V.R. WITH SW. 10K B
VR103	S02-2508-15	ROTARY SWITCH WITH VR.2K,10KB
VR104	R12-3520-05	RES. SEMI FIXED 10K B
VR105	R12-1518-05	RES. SEMI FIXED 2K B
VR106	R12-0421-05	RES. SEMI FIXED 100 B

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION
VR107	R12-1517-05	RES. SEMI FIXED 1K B
VR108	NO USE	
VR109	R12-5518-05	RES. SEMI FIXED 200K OHM B
VR110	R12-1517-05	RES. SEMI FIXED 1K B
VR111	R12-0540-05	RES. SEMI FIXED 500 B

CONNECTION UNIT

(X77-1260-00)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	E33-4037-00	WIRE ASSY			
	J25-2995-03	PCB (UNMOUNTED)			
	R92-0150-05	JUMPING RES.	ZERO OHM		
C001	CQ93M1H103J	CAP. MYLAR	0.01	5%	50V
C002	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
D001	DS442X	DIODE			
D002	DS442X	DIODE			
D003	S1VB40	DIODE			
J001	E31-2374-05	LEAD WIRE WITH CONNECTOR			
P001	E40-7203-05	PIN CONNECTOR	3P		
P002	E40-7204-05	PIN CONNECTOR	4P		
P003	E40-0604-05	PIN CONNECTOR	6P		
P004	E40-0804-05	PIN CONNECTOR	8P		
P005	E40-0804-05	PIN CONNECTOR	8P		
P006	E40-1111-05	PIN CONNECTOR	11P		
P007	E40-1111-05	PIN CONNECTOR	11P		
P008	E40-1111-05	PIN CONNECTOR	11P		
P009	E40-1111-05	PIN CONNECTOR	11P		
P010	E40-0273-05	PIN CONNECTOR	2 P		
P011	E40-0373-05	PIN CONNECTOR	3 P		
P012	E40-0273-05	PIN CONNECTOR	2 P		
P013	E40-0273-05	PIN CONNECTOR	2 P		
P014	E40-0273-05	PIN CONNECTOR	2 P		
P015	E40-0673-05	PIN CONNECTOR	6 P		
Q001	2SC1384	TR. SI, NPN			
Q002	2SA684	TR. SI, PNP			
R001	RD14BB2E331J	RES. CARBON	330	5%	1/4W
R002	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R003	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R004	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R005	RD14BB2E330J	RES. CARBON	33	5%	1/4W
R006	RN14BK2E1300F	RES. METAL FILM	130	1%	1/4W
R007	RN14BK2E4302F	RES. METAL FILM	43K	1%	1/4W
R008	RN14BK2E9102F	RES. METAL FILM	91K	1%	1/4W
R009	RN14BK2E1003F	RES. METAL FILM	100K	1%	1/4W
R010	RN14BK2E3601F	RES. METAL FILM	3.6K	1%	1/4W
R011	RD14BB2E392J	RES. CARBON	3.9K	5%	1/4W
R012	NO USE				
R013	RD14BY2H100J	RES. CARBON	10	5%	1/2W
R014	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R015	RD14BB2E101J	RES. CARBON	100	5%	1/4W
U001	NJM4558D	IC			

CONNECTION UNIT

(X77-1260-01)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	E33-4037-00	WIRE ASSY			
	J25-2995-03	PCB (UNMOUNTED)			
	R92-0150-05	JUMPING RES.	ZERO OHM		
C001	CQ93M1H103J	CAP. MYLAR	0.01	5%	50V
C002	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
D001	DS442X	DIODE			
D002	DS442X	DIODE			
D003	S1QB40	DIODE			
D004	WZ-120	DIODE			
J001	E31-2374-05	LEAD WIRE WITH CONNECTOR			
P001	E40-0373-05	PIN CONNECTOR	3P		
P001	E40-7203-05	PIN CONNECTOR	3P		
P002	E40-7204-05	PIN CONNECTOR	4P		
P003	E40-0604-05	PIN CONNECTOR	6P		
P004	E40-0804-05	PIN CONNECTOR	8P		
P005	E40-0804-05	PIN CONNECTOR	8P		
P006	E40-1111-05	PIN CONNECTOR	11P		
P007	E40-1111-05	PIN CONNECTOR	11P		
P008	E40-1111-05	PIN CONNECTOR	11P		
P009	E40-1111-05	PIN CONNECTOR	11P		
P010	E40-0273-05	PIN CONNECTOR	2P		
P011	NO USE				
P012	E40-0273-05	PIN CONNECTOR	2P		
P013	E40-0273-05	PIN CONNECTOR	2P		
P014	E40-0273-05	PIN CONNECTOR	2P		
P015	E40-0673-05	PIN CONNECTOR	6P		
Q001	2SC1384	TR. SI, NPN			
Q002	2SA684	TR. SI, PNP			
R001	RD14BB2E331J	RES. CARBON	330	5%	1/4W
R005	RD14BB2E330J	RES. CARBON	33	5%	1/4W
R006	RN14BK2E1300F	RES. METAL FILM	130	1%	1/4W
R007	RN14BK2E4302F	RES. METAL FILM	43K	1%	1/4W
R008	RN14BK2E9102F	RES. METAL FILM	91K	1%	1/4W
R009	RN14BK2E1003F	RES. METAL FILM	100K	1%	1/4W
R010	RN14BK2E3601F	RES. METAL FILM	3.6K	1%	1/4W
R011	RD14BB2E392J	RES. CARBON	3.9K	5%	1/4W
R012	RD14BY2H100J	RES. CARBON	10	5%	1/2W
R013	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R014	RD14BB2E101J	RES. CARBON	100	5%	1/4W
U001	NJM4558D	IC	DUAL OP AMP.		

CONNECTION UNIT

(X77-1260-02)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	E33-4037-00	WIRE ASSY			
	J25-2995-03	PCB (UNMOUNTED)			
	R92-0150-05	JUMPING RES.	ZERO OHM		
C001	CQ93M1H103J	CAP. MYLAR	0.01	5%	50V
C002	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
D001	DS442X	DIODE			
D002	DS442X	DIODE			
D003	S1VB40	DIODE			
J001	E31-2374-05	LEAD WIRE WITH CONNECTOR			
P001	E40-7203-05	PIN CONNECTOR	3P		
P002	E40-7204-05	PIN CONNECTOR	4P		
P003	E40-0604-05	PIN CONNECTOR	6P		
P004	E40-0804-05	PIN CONNECTOR	8P		
P005	E40-0804-05	PIN CONNECTOR	8P		
P006	E40-1111-05	PIN CONNECTOR	11P		
P007	E40-1111-05	PIN CONNECTOR	11P		
P008	E40-1111-05	PIN CONNECTOR	11P		
P009	E40-1111-05	PIN CONNECTOR	11P		
P010	E40-0273-05	PIN CONNECTOR	2 P		
P011	E40-0373-05	PIN CONNECTOR	3 P		
P012	E40-0273-05	PIN CONNECTOR	2 P		
P013	E40-0273-05	PIN CONNECTOR	2 P		
P014	E40-0273-05	PIN CONNECTOR	2 P		
P015	E40-0673-05	PIN CONNECTOR	6 P		
Q001	2SC1384	TR. SI, NPN			
Q002	2SA684	TR. SI, PNP			
R001	RD14BB2E331J	RES. CARBON	330	5%	1/4W
R002	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R003	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R004	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R005	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R006	RN14BK2E1300F	RES. METAL FILM	130	1%	1/4W
R007	RN14BK2E4302F	RES. METAL FILM	43K	1%	1/4W
R008	RN14BK2E9102F	RES. METAL FILM	91K	1%	1/4W
R009	RN14BK2E1003F	RES. METAL FILM	100K	1%	1/4W
R010	RN14BK2E3601F	RES. METAL FILM	3.6K	1%	1/4W
R011	RD14BB2E392J	RES. CARBON	3.9K	5%	1/4W
R012	NO USE				
R013	RD14BY2H100J	RES. CARBON	10	5%	1/2W
R014	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R015	RD14BB2E101J	RES. CARBON	100	5%	1/4W
U001	NJM4558D	IC			

CONNECTION UNIT

(X77-1260-03)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	E33-4037-00	WIRE ASSY			
	J25-2995-03	PCB (UNMOUNTED)			
	R92-0150-05	JUMPING RES.	ZERO OHM		
C001	CQ93M1H103J	CAP. MYLAR	0.01	5%	50V
C002	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
D001	DS442X	DIODE			
D002	DS442X	DIODE			
D003	S1QB40	DIODE			
D004	WZ-120	DIODE			
J001	E31-2374-05	LEAD WIRE WITH CONNECTOR			

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION			
P001	E40-0373-05	PIN CONNECTOR	3P		
P001	E40-7203-05	PIN CONNECTOR	3P		
P002	E40-7204-05	PIN CONNECTOR	4P		
P003	E40-0604-05	PIN CONNECTOR	6P		
P004	E40-0804-05	PIN CONNECTOR	8P		
P005	E40-0804-05	PIN CONNECTOR	8P		
P006	E40-1111-05	PIN CONNECTOR	11P		
P007	E40-1111-05	PIN CONNECTOR	11P		
P008	E40-1111-05	PIN CONNECTOR	11P		
P009	E40-1111-05	PIN CONNECTOR	11P		
P010	E40-0273-05	PIN CONNECTOR	2P		
P011	NO USE				
P012	E40-0273-05	PIN CONNECTOR	2P		
P013	E40-0273-05	PIN CONNECTOR	2P		
P014	E40-0273-05	PIN CONNECTOR	2P		
P015	E40-0673-05	PIN CONNECTOR	6P		
Q001	2SC1384	TR. SI, NPN			
Q002	2SA684	TR. SI, PNP			
R001	RD14BB2E331J	RES. CARBON	330	5%	1/4W
R005	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R006	RN14BK2E1300F	RES. METAL FILM	130	1%	1/4W
R007	RN14BK2E4302F	RES. METAL FILM	43K	1%	1/4W
R008	RN14BK2E9102F	RES. METAL FILM	91K	1%	1/4W
R009	RN14BK2E1003F	RES. METAL FILM	100K	1%	1/4W
R010	RN14BK2E3601F	RES. METAL FILM	3.6K	1%	1/4W
R011	RD14BB2E392J	RES. CARBON	3.9K	5%	1/4W
R012	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R013	RD14BY2H100J	RES. CARBON	10	5%	1/2W
U001	NJM4558D	IC	DUAL OP AMP.		

CRT SOCKET UNIT

(X81-1250-00)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	E01-0103-05	CRT SOCKET			
	J25-2996-14	PCB (UNMOUNTED)			
	R92-0150-05	JUMPING RES.	ZERO OHM		
J016	E31-2366-05	LEAD WIRE WITH CONNECTOR			
J017	E31-2366-05	LEAD WIRE WITH CONNECTOR			
J018	NO USE				
J019	E31-2364-05	LEAD WIRE WITH CONNECTOR			
J020	NO USE				
J021	E31-2363-05	LEAD WIRE WITH CONNECTOR			
J022	NO USE				
J023	E31-2365-05	LEAD WIRE WITH CONNECTOR			
L001	L40-2292-13	FIXED INDUCTOR	2.2UH		
L002	L40-2292-13	FIXED INDUCTOR	2.2UH		
R001	RD14BB2E151J	RES. CARBON	150	5%	1/4W
R002	RD14BB2E151J	RES. CARBON	150	5%	1/4W

CRT SOCKET UNIT

(X81-1250-01)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	E01-0103-05	CRT SOCKET			
	J25-2996-14	PCB (UNMOUNTED)			
C001	CC45CH2H010C	CAP. CERAMIC	1P	0.25P	500V
C002	CC45SL1H050C	CAP. CERAMIC	5P	0.25P	50V
J016	E31-2366-05	LEAD WIRE WITH CONNECTOR			
J017	E31-2366-05	LEAD WIRE WITH CONNECTOR			
J018	NO USE				
J019	E31-2364-05	LEAD WIRE WITH CONNECTOR			
J020	NO USE				
J021	E31-2363-05	LEAD WIRE WITH CONNECTOR			
J022	NO USE				
J023	E31-2365-05	LEAD WIRE WITH CONNECTOR			
L001	L40-2792-13	FIXED INDUCTOR	2.7UH		
L002	L40-2792-13	FIXED INDUCTOR	2.7UH		
R001	RD14BB2E681J	RES. CARBON	680	5%	1/4W
R002	RD14BB2E681J	RES. CARBON	680	5%	1/4W

CS-1021 Y70-1530-61

REF.NO	PARTS NO	NAME & DESCRIPTION			
	A01-0897-22	CASE			
	A01-0898-12	CASE			
	A10-1444-02	CHASSIS			
	A20-2761-02	PANEL (MOLDED)			
	A21-1076-02	DECORATIVE PANEL			
	A22-0826-02	SUB PANEL			
	A22-0827-13	SUB PANEL			
	A23-1643-02	REAR PANEL			
	B07-0712-13	ESCUTCHEON FOR FILTER			
	B19-0726-04	FILTER			
	B30-0903-15	LED LAMP (RED)			
	B39-0407-04	SPACER			
	B40-2765-04	NAME PLATE (SERIAL NO)			
	B41-0774-03	CAUTION LABEL			
	B50-7570-00	INSTRUCTION MANUAL			
	E04-0251-05	BNC RECEPTACLE			
	E21-0657-04	TERMINAL (GND)			
	E21-0660-04	TERMINAL(CAL)			
	E23-0043-04	EARTH LUG			
	E23-0513-05	EARTH LUG			
	E23-0524-04	EARTH LUG			
	E23-0525-14	EARTH PLATE			
	E30-1852-05	POWER CORD ASS'Y (CEE)			
	E31-2370-05	LEAD WIRE WITH CONNECTOR			
	E31-2384-15	LEAD WIRE WITH CONNECTOR			
	F05-5013-05	FUSE	0.5A		
	F05-8015-05	FUSE	0.8A		
	F10-1565-04	SHIELDING PLATE			
	F11-0995-03	SHIELD CASE			
	F15-0733-04	FELT			
	G02-0607-04	SPRING FOR CRT			
	G13-0716-04	CUSHION			
	H01-5769-04	CARTON BOX			
	H10-2815-02	FOAMED STYRENE PAD			
	H10-2816-02	FOAMED STYRENE PAD			
	H20-1719-04	VINYL COVER			
	H25-0029-04	POLYETHYLENE BAG			
	J02-0089-05	RUBBER LEG			
	J02-0510-14	SUB LEG			
	J10-0100-22	BEZEL			
	J11-0046-05	CABLE CLAMP			
	J13-0033-15	FUSE HOLDER			
	J19-1634-04	HOLDER FOR LEAD			
	J19-1635-04	HOLDER FOR LED			
	J21-2573-04	HOLDER FOR LEG			
	J21-2970-23	BLACKET FOR CRT			
	J21-2973-14	AC VOLTAGE PLATE220V			
	J21-4512-04	BLACKET FOR CRT			
	J31-0603-04	COLLAR			
	J42-0085-05	BUSHING (FOR AC CORD)			
	J42-0523-04	BUSHING			
	J61-0038-05	FREE UP BELT (FOR CABLE TIE)			
	J61-0408-05	WIRE WRAPPING BAND			
	J61-0515-05	SUPPORT (I TYPE)			
	J61-0516-05	SUPPORT (T TYPE)			
	K01-0518-05	HANDLE			
	K21-0851-03	KNOB			
	K21-0853-23	KNOB			
	K21-0854-23	KNOB			
	K21-0855-14	KNOB			
	K21-0856-23	KNOB			
	K27-0526-04	KNOB FOR LEVER			
	K27-0528-04	KNOB FOR PUSH			
	L01-9344-15	POWER TRANSFORMER			
	L39-0518-05	ROTATOR COIL			
	N08-0611-04	DRESSED SCREW			
	N09-0715-04	SCREW, PAN HD	M 4X31		
	N09-0716-05	SCREW	M 4X10		
	N09-0717-05	SCREW, TRUSS HD	M 3X12		
	N09-0720-05	SCREW, SEMS PAN HD			
	N10-2030-46	NUT, HEX			
	N10-2070-46	NUT, HEX			
	N15-1030-41	WASHER, FLAT FOR M3			
	N15-1040-41	WASHER			
	N17-1030-46	TOOTHED LOCK WASHER FOR M3			
	N30-3004-41	SCREW, PAN HD	M 3X4		
	N30-3006-41	SCREW, PAN HD	M 3X6		
	N30-3008-41	SCREW, PAN HD	M 3X8		
	N88-3006-41	SCREW, FLAT HD TAP TITE			
	N89-3006-41	SCREW, BINDING TAP TITE			
	R05-3504-05	V.R.	10K B		
	R05-3505-05	V.R.	20K B		
	R05-8001-05	V.R.	3M B		
	S59-2503-05	SWITCH			
	W01-0503-04	CORD WRAP			
	X73-1490-04	AMPLIFIER UNIT			
	X73-1630-00	AMPLIFIER UNIT			
	X74-1340-04	SWEEP CIRCUIT UNIT			
	X75-1140-04	ATTENUATOR UNIT			
	X77-1261-61	CONNECTION UNIT			
	X81-1250-04	CRT SOCKET UNIT			
	Y87-1840-00	PROBE PC-20			
	150GTM31A	CRT			
	212-2014-05	TUBE (PLASTIC)			
	212-3017-05	TUBE (PLASTIC)			
R100	RD14BB2E431J	RES. CARBON	430	5%	1/4W

PARTS LIST

VERTICAL ATTENUATOR UNIT

(X75-1140-04)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	A22-0828-03	SUB PANEL			
	E04-0251-05	BNC RECEPTACLE			
	E31-2367-15	LEAD WIRE WITH CONNECTOR			
	F10-1564-04	SHIELD PLATE			
	F10-1566-04	SHIELD PLATE			
	J25-2997-13	PCB (UNMOUNTED)			
	K21-0852-03	KNOB			
	K21-0855-14	KNOB			
	N30-3006-46	SCREW, PAN HD	M 3X6		
	N89-3006-41	SCREW, BINDING TAP TITE			
	R92-0150-05	JUMPING RES.	ZERO OHM		
C001	C91-0501-05	CAP. METAL FILM	0.047	10%	630V
C002	CM93BD2A470J	CAP. MICA	47P	5%	100V
C003	CM93BD2A471J	CAP. MICA	470P	5%	100V
C004	C91-0502-05	CAP. METAL FILM	0.01	20%	630V
C005	NO USE				
C006	CC45CH1H0R5C	CAP. CERAMIC	0.5P	0.25P	50V
C009	CC45CH1H470J	CAP. CERAMIC	47P	5%	50V
C010	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C011	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C012	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C013	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C014	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C015	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C016	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C017	NO USE				
C018	CC45CH1H010C	CAP. CERAMIC	1P	0.25P	50V
C019	CE04BW1H010M	CAP. ELECTRO	1	20%	50V
C020	CK45B1H152K	CAP. CERAMIC	1500P	10%	50V
C023	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
D001	MTZ9.1JC	DIODE ZENER	9V		
D002	MTZ9.1JC	DIODE ZENER	9V		
Q001	2SK30A(O)	FET,N-CHANNEL			
Q002	2SA1005(K)	TR. SI, PNP			
Q003	2SA1005(K)	TR. SI, PNP			
Q004	2SC2786(K)	TR. SI, NPN			
Q005	2SC2786(K)	TR. SI, NPN			
R001	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R002	RD14BB2E105J	RES. CARBON	1M	5%	1/4W
R003	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R004	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R005	RN14BK2E9003F	RES. METAL FILM	900K	1%	1/4W
R006	RN14BK2E1113F	RES. METAL FILM	111K	1%	1/4W
R007	RD14BB2E820J	RES. CARBON	82	5%	1/4W
R008	RN14BK2E9903F	RES. METAL FILM	990K	1%	1/4W
R009	RN14BK2E1012F	RES. METAL FILM	10.1K	1%	1/4W
R010	RD14BB2E100J	RES. CARBON	10	5%	1/4W
R011	RN14BK2E1004F	RES. METAL FILM	1M	1%	1/4W
R012	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R013	RN14BK2E27R0F	RES. METAL FILM	27.0	1%	1/4W
R014	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R015	RN14BK2E27R0F	RES. METAL FILM	27.0	1%	1/4W
R016	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R017	NO USE				
R018	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R019	RD14BB2E121J	RES. CARBON	120	5%	1/4W
R020	RD14BB2E473J	RES. CARBON	47K	5%	1/4W
R021	RD14BB2E474J	RES. CARBON	470K	5%	1/4W
R022	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R023	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R024	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R025	RD14BB2E392J	RES. CARBON	3.9K	5%	1/4W
R026	RD14BB2E753J	RES. CARBON	75K	5%	1/4W
R027	RD14BB2E754J	RES. CARBON	750K	5%	1/4W
R028	RD14BB2E122J	RES. CARBON	1.2K	5%	1/4W
R029	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W
R030	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R031	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R032	NO USE				
R033	RN14BK2E9100F	RES. METAL FILM	910	1%	1/4W
R034	RN14BK2E1000F	RES. METAL FILM	100	1%	1/4W
R035	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R036	RN14BK2E3000F	RES. METAL FILM	300	1%	1/4W
R037	RN14BK2E1800F	RES. METAL FILM	180	1%	1/4W
R038	RN14BK2E1200F	RES. METAL FILM	120	1%	1/4W
R039	RD14BB2E151J	RES. CARBON	150	5%	1/4W
R040	RD14BB2E560J	RES. CARBON	56	5%	1/4W
R041	RN14BK2E3000F	RES. METAL FILM	300	1%	1/4W
R042	RN14BK2E1800F	RES. METAL FILM	180	1%	1/4W
R043	RN14BK2E1200F	RES. METAL FILM	120	1%	1/4W
R044	RD14BB2E151J	RES. CARBON	150	5%	1/4W
R045	RD14BB2E560J	RES. CARBON	56	5%	1/4W
R046	RD14BB2E333J	RES. CARBON	33K	5%	1/4W
R047	RD14BB2E473J	RES. CARBON	47K	5%	1/4W
R048	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R049	RD14BB2C163J	RES. CARBON	16K	5%	1/6W
R050	NO USE				
R051	RD14BB2E361J	RES. CARBON	360	5%	1/4W
R052	RD14BB2C910J	RES. CARBON	91	5%	1/6W
R053	RD14BB2C111J	RES. CARBON	110	5%	1/6W
S001	S32-4007-05	LEVER SWITCH			
S002	S02-3501-15	ROTARY SW. W/V.R500 B			
TC001	C05-0427-05	CAP. TRIMMER	10P		
TC002	C05-0428-05	CAP. TRIMMER	20P		
TC003	C05-0427-05	CAP. TRIMMER	10P		
TC004	C05-0428-05	CAP. TRIMMER	20P		
TC005	C05-0427-05	CAP. TRIMMER	10P		
U001	M47F(C)	FET			
U002	NO USE				
U003	M47F(B)	FET			
VR001	R12-3502-05	RES. SEMI FIXED	33K B		
VR002	R12-3502-05	RES. SEMI FIXED	33K B		
VR003	R12-3502-05	RES. SEMI FIXED	33K B		
VR004	R12-3502-05	RES. SEMI FIXED	33K B		

VERTICAL AMP & POWER UNIT

(X73-1490-04)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	E23-0526-04	EARTH PLATE			
	E31-2584-05	LEAD WIRE WITH CONNECTOR			
	E31-2585-05	LEAD WIRE WITH CONNECTOR			
	E33-4031-00	WIRE ASSY			
	F01-0836-04	HEAT SINK			
	J25-2999-13	PCB (UNMOUNTED)			
	N19-0191-05	WASHER NONMETAL			
	N19-0702-04	WASHER			
	N30-3008-46	SCREW, PAN HD	M 3X8		
	R92-0150-05	JUMPING RES.	ZERO OHM		
	212-1018-05	TUBE (PLASTIC)			
	212-2014-05	TUBE (PLASTIC)			
C002	CC45CH1H010C	CAP. CERAMIC	1P	0.25P	50V
C006	CC45CH1H151J	CAP. CERAMIC	150P	5%	50V
C007	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C008	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C009	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C013	CC45CH1H470J	CAP. CERAMIC	47P	5%	50V
C014	CE04W1E220M	CAP. ELECTRO	22	20%	25V
C015	NO USE				
C016	CE04W1E220M	CAP. ELECTRO	22	20%	25V
C020	CC45CH1H1R5C	CAP. CERAMIC	1.5P	0.25P	50V
C102	CC45CH1H010C	CAP. CERAMIC	1P	0.25P	50V
C103	NO USE				
C104	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C105	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C106	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C107	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C108	NO USE				
C109	CC45CH1H470J	CAP. CERAMIC	47P	5%	50V
C110	CC45CH1H470J	CAP. CERAMIC	47P	5%	50V
C111	CE04BW1H010M	CAP. ELECTRO	1	20%	50V
C112	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C115	CC45CH1H020C	CAP. CERAMIC	2P	0.25P	50V
C301	CE04W1V222M	CAP. ELECTRO	2200	20%	35V
C302	CE04W1V222M	CAP. ELECTRO	2200	20%	35V
C303	CE04W1E222M	CAP. ELECTRO	2200	20%	25V
C304	C90-0910-05	CAP. ELECTRO	100	20%	200V
C305	CE04W2E470	CAP. ELECTRO	47		250V
C306	CE04W1A101M	CAP. ELECTRO	100	20%	10V
C307	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C308	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C309	CE04W2C100	CAP. ELECTRO	10		160V
C310	CE04W2E010	CAP. ELECTRO	1		250V
C311	CE04BW1H010M	CAP. ELECTRO	1	20%	50V
C312	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C313	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C314	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C315	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C316	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C317	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C318	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C319	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C320	CK45B2H103K	CAP. CERAMIC	0.01	10%	500V
D001	DS442X	DIODE			
D101	DS442X	DIODE			
D102	DS442X	DIODE			
D103	DS442X	DIODE			
D104	DS442X	DIODE			
D105	DS442X	DIODE			
D106	DS442X	DIODE			

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION
D107	DS442X	DIODE
D108	MTZ10JC	DIODE, ZENER 10V
D301	S2VB40F	DIODE, BRIDGE
D302	S2VB40F	DIODE, BRIDGE
D303	S1VB60	DIODE
D304	S1VB60	DIODE
D305	DS442X	DIODE
D306	DS442X	DIODE
D307	V06B	DIODE
P001	E40-0473-05	PIN CONNECTOR 4 P
P002	E40-0273-05	PIN CONNECTOR 2 P
P101	E40-0473-05	PIN CONNECTOR 4 P
P301	E40-0930-05	PIN CONNECTOR 9P
P302	E40-1116-05	PIN CONNECTOR 11 P
P303	E40-1116-05	PIN CONNECTOR 11 P
Q002	2SA1005(K)	TR. SI, PNP
Q003	2SA1005(K)	TR. SI, PNP
Q004	2SC2786(K)	TR. SI, NPN
Q005	2SC2786(K)	TR. SI, NPN
Q009	2SC2786(K)	TR. SI, NPN
Q010	2SC2786(K)	TR. SI, NPN
Q011	2SC2786(K)	TR. SI, NPN
Q012	2SC2786(K)	TR. SI, NPN
Q013	2SC2786(K)	TR. SI, NPN
Q014	2SC2786(K)	TR. SI, NPN
Q015	2SC2407	TR. SI, NPN
Q016	2SC2407	TR. SI, NPN
Q102	2SA1005(K)	TR. SI, PNP
Q103	2SA1005(K)	TR. SI, PNP
Q104	2SC2786(K)	TR. SI, NPN
Q105	2SC2786(K)	TR. SI, NPN
Q106	2SC2785(F)	TR. SI, NPN
Q107	2SC2786(K)	TR. SI, NPN
Q108	2SC2786(K)	TR. SI, NPN
Q109	2SC2786(K)	TR. SI, NPN
Q110	2SC2786(K)	TR. SI, NPN
Q111	2SC2786(K)	TR. SI, NPN
Q112	2SC2786(K)	TR. SI, NPN
Q113	2SA1175(F)	TR. SI, PNP
Q114	2SC2785(F)	TR. SI, NPN
Q115	2SC2786(K)	TR. SI, NPN
Q301	2SA1009(L,K)	TR. SI, PNP
Q302	2SA1009(L,K)	TR. SI, PNP
Q303	2SA1175(F)	TR. SI, PNP
Q304	2SA1175(F)	TR. SI, PNP
Q305	2SC2271(E)	TR. SI, NPN
Q306	2SC2271(E)	TR. SI, NPN
R001	RD14BB2E105J	RES. CARBON 1M 5% 1/4W
R002	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R003	RD14BB2E562J	RES. CARBON 5.6K 5% 1/4W
R004	RD14BB2E562J	RES. CARBON 5.6K 5% 1/4W
R005	RD14BB2E120J	RES. CARBON 12 5% 1/4W
R006	RD14BB2E510J	RES. CARBON 51 5% 1/4W
R007	RD14BB2E510J	RES. CARBON 51 5% 1/4W
R008	RD14BB2E392J	RES. CARBON 3.9K 5% 1/4W
R009	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R010	RD14BB2E302J	RES. CARBON 3K 5% 1/4W
R011	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R012	RD14BB2E243J	RES. CARBON 24K 5% 1/4W
R013	RD14BB2E302J	RES. CARBON 3K 5% 1/4W
R014	RN14BK2E1000F	RES. METAL FILM 100 1% 1/4W
R015	RN14BK2E1401F	RES. METAL FILM 1.4K 1% 1/4W
R016	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R017	RD14BB2E302J	RES. CARBON 3K 5% 1/4W
R018	RD14BB2E104J	RES. CARBON 100K 5% 1/4W
R019	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R020	NO USE	
R021	RD14BB2E331J	RES. CARBON 330 5% 1/4W
R031	RD14BB2E151J	RES. CARBON 150 5% 1/4W
R032	RD14BB2E101J	RES. CARBON 100 5% 1/4W
R033	RD14BB2E101J	RES. CARBON 100 5% 1/4W
R034	RD14BB2E222J	RES. CARBON 2.2K 5% 1/4W
R035	RD14BB2E222J	RES. CARBON 2.2K 5% 1/4W
R036	RN14BK2E2201F	RES. METAL FILM 2.2K 1% 1/4W
R037	RN14BK2E2201F	RES. METAL FILM 2.2K 1% 1/4W
R038	RD14BB2E750J	RES. CARBON 75 5% 1/4W
R039	RD14BB2E431J	RES. CARBON 430 5% 1/4W
R040	RD14BB2E682J	RES. CARBON 6.8K 5% 1/4W
R041	RD14BB2E332J	RES. CARBON 3.3K 5% 1/4W
R042	RD14BB2E471J	RES. CARBON 470 5% 1/4W
R043	RD14BB2E471J	RES. CARBON 470 5% 1/4W
R044	RN14BK2E8200F	RES. METAL FILM 820 1% 1/4W
R045	RN14BK2E8200F	RES. METAL FILM 820 1% 1/4W
R046	RN14BK2E8200F	RES. METAL FILM 820 1% 1/4W
R047	RN14BK2E8200F	RES. METAL FILM 820 1% 1/4W
R048	RD14BB2E101J	RES. CARBON 100 5% 1/4W
R049	RD14BB2E302J	RES. CARBON 3K 5% 1/4W
R050	RD14BB2E302J	RES. CARBON 3K 5% 1/4W
R051	RD14BB2E101J	RES. CARBON 100 5% 1/4W
R052	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R053	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R054	RD14BB2E331J	RES. CARBON 330 5% 1/4W
R055	RD14BB2E331J	RES. CARBON 330 5% 1/4W
R056	RD14BB2E750J	RES. CARBON 75 5% 1/4W
R065	RD14BB2E201J	RES. CARBON 200 5% 1/4W
R066	RD14BB2E471J	RES. CARBON 470 5% 1/4W
R067	RD14BB2E272J	RES. CARBON 2.7K 5% 1/4W
R068	RD14BB2E104J	RES. CARBON 100K 5% 1/4W
R069	RD14BB2E223J	RES. CARBON 22K 5% 1/4W
R101	RD14BB2E105J	RES. CARBON 1M 5% 1/4W
R102	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R103	RD14BB2E562J	RES. CARBON 5.6K 5% 1/4W
R104	RD14BB2E562J	RES. CARBON 5.6K 5% 1/4W
R105	RD14BB2E120J	RES. CARBON 12 5% 1/4W
R106	RD14BB2E510J	RES. CARBON 51 5% 1/4W
R107	RD14BB2E510J	RES. CARBON 51 5% 1/4W
R108	RD14BB2E392J	RES. CARBON 3.9K 5% 1/4W
R109	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R110	RD14BB2E302J	RES. CARBON 3K 5% 1/4W
R111	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R112	RD14BB2E243J	RES. CARBON 24K 5% 1/4W
R113	RD14BB2E302J	RES. CARBON 3K 5% 1/4W
R114	RN14BK2E1000F	RES. METAL FILM 100 1% 1/4W
R115	RD14BB2E104J	RES. CARBON 100K 5% 1/4W
R116	RN14BK2E1401F	RES. METAL FILM 1.4K 1% 1/4W
R117	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R118	RD14BB2E182J	RES. CARBON 1.8K 5% 1/4W
R119	RD14BB2E223J	RES. CARBON 22K 5% 1/4W
R120	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R121	RD14BB2E561J	RES. CARBON 560 5% 1/4W
R122	NO USE	
R123	RD14BB2E333J	RES. CARBON 33K 5% 1/4W
R124	RD14BB2E151J	RES. CARBON 150 5% 1/4W
R125	RD14BB2E101J	RES. CARBON 100 5% 1/4W
R126	RD14BB2E101J	RES. CARBON 100 5% 1/4W
R127	RD14BB2E222J	RES. CARBON 2.2K 5% 1/4W
R128	RD14BB2E222J	RES. CARBON 2.2K 5% 1/4W
R129	RN14BK2E2201F	RES. METAL FILM 2.2K 1% 1/4W
R130	RN14BK2E2201F	RES. METAL FILM 2.2K 1% 1/4W
R131	RD14BB2E750J	RES. CARBON 75 5% 1/4W
R132	RN14BK2E2001F	RES. METAL FILM 2K 1% 1/4W
R133	RN14BK2E2001F	RES. METAL FILM 2K 1% 1/4W
R134	RD14BB2E510J	RES. CARBON 51 5% 1/4W
R135	RD14BB2E511J	RES. CARBON 510 5% 1/4W
R136	RD14BB2E123J	RES. CARBON 12K 5% 1/4W
R137	RD14BB2E472J	RES. CARBON 4.7K 5% 1/4W
R138	RD14BB2E332J	RES. CARBON 3.3K 5% 1/4W
R139	RD14BB2E332J	RES. CARBON 3.3K 5% 1/4W
R140	RD14BB2E471J	RES. CARBON 470 5% 1/4W
R141	RD14BB2E471J	RES. CARBON 470 5% 1/4W
R142	RD14BB2E471J	RES. CARBON 470 5% 1/4W
R143	RD14BB2E471J	RES. CARBON 470 5% 1/4W
R144	RD14BB2E272J	RES. CARBON 2.7K 5% 1/4W
R145	RD14BB2E153J	RES. CARBON 15K 5% 1/4W
R146	RD14BB2E153J	RES. CARBON 15K 5% 1/4W
R147	RD14BB2E272J	RES. CARBON 2.7K 5% 1/4W
R148	RD14BB2E223J	RES. CARBON 22K 5% 1/4W
R149	RD14BB2E682J	RES. CARBON 6.8K 5% 1/4W
R150	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R151	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R152	RD14BB2E151J	RES. CARBON 150 5% 1/4W
R153	RD14BB2E101J	RES. CARBON 100 5% 1/4W
R154	NO USE	
R155	RD14BB2E470J	RES. CARBON 47 5% 1/4W
R156	NO USE	
R157	RD14BB2E331J	RES. CARBON 330 5% 1/4W
R158	RD14BB2E104J	RES. CARBON 100K 5% 1/4W
R159	RD14BB2E682J	RES. CARBON 6.8K 5% 1/4W
R301	RD14BB2E473J	RES. CARBON 47K 5% 1/4W
R302	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R303	RD14BB2E3R3J	RES. CARBON 3.3 5% 1/4W
R304	RD14BB2E100J	RES. CARBON 10 5% 1/4W
R305	RD14BB2E562J	RES. CARBON 5.6K 5% 1/4W
R306	RD14BB2E822J	RES. CARBON 8.2K 5% 1/4W
R307	RD14BB2E222J	RES. CARBON 2.2K 5% 1/4W
R308	RD14BB2E222J	RES. CARBON 2.2K 5% 1/4W
R309	RN14BK2E1502F	RES. METAL FILM 15K 1% 1/4W
R310	RN14BK2E1003F	RES. METAL FILM 100K 1% 1/4W
R311	RN14BK2E1602F	RES. METAL FILM 16K 1% 1/4W
R312	RN14BK2E1503F	RES. METAL FILM 150K 1% 1/4W
R313	RD14BY2H104J	RES. CARBON 100K 5% 1/2W
R314	RD14BY2H104J	RES. CARBON 100K 5% 1/2W
S101	S42-4509-05	PUSH SWITCH
TC001	C05-0425-05	CAP. TRIMMER 70P
TC002	C05-0425-05	CAP. TRIMMER 70P
TC101	C05-0434-05	CAP. TRIMMER 20P
TC102	C05-0434-05	CAP. TRIMMER 20P
TP001	E23-0046-04	TERMINAL
TP002	E23-0046-04	TERMINAL

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION
TP003	E23-0046-04	TERMINAL
TP004	E23-0046-04	TERMINAL
TP101	E23-0046-04	TERMINAL
TP102	E23-0046-04	TERMINAL
TP103	E23-0046-04	TERMINAL
TP104	E23-0046-04	TERMINAL
U001	M47F(B)	FET
U101	M47F(B)	FET
U301	UPC7805H	IC
U302	UPC7915HA	IC
U303	NJM7815A	IC
U304	NJM4558D	IC
VR001	R05-3509-05	V.R. 20K B
VR002	NO USE	
VR003	R12-0539-05	RES. SEMI FIXED 200 B
VR004	R12-0421-05	RES. SEMI FIXED 100 B
VR005	R12-0421-05	RES. SEMI FIXED 100 B
VR006	R12-0421-05	RES. SEMI FIXED 100 B
VR101	R05-3509-05	V.R. 20K B
VR102	R12-3523-05	RES. SEMI FIXED 20K B
VR103	R12-0541-05	RES. SEMI FIXED 100 B
VR104	R12-0543-05	RES. SEMI FIXED 500 B

HORIZONTAL & HIGH VOLTAGE UNIT

(X74-1340-04)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	E23-0015-04	EARTH LUG			
	E23-0046-04	TERMINAL			
	E31-2170-05	JUMPING WIRE			
	E33-4028-00	WIRE ASSY			
	F01-0230-04	HEAT SINK			
	F01-0820-04	HEAT SINK			
	F01-0835-05	HEAT SINK			
	F15-0727-04	HOLDER (NEON TUBE)			
	F20-0622-05	INSULATOR			
	J25-2998-13	PCB (UNMOUNTED)			
	J31-0604-04	COLLAR			
	N19-0191-05	WASHER NONMETAL			
	N30-3008-46	SCREW, PAN HD	M 3X8		
	R92-0150-05	JUMPING RES.	ZERO OHM		
	002-0001-05	BRAIDED WIRE			
	212-1018-05	TUBE (PLASTIC)			
	212-3013-05	TUBE (PLASTIC)			
C001	CC45CH1H330J	CAP. CERAMIC	33P	5%	50V
C002	CC45CH2H010C	CAP. CERAMIC	1P	0.25%	500V
C003	CK45B2H472K	CAP. CERAMIC	4700P	10%	500V
C004	CE04W1H100M	CAP. ELECTRO	10	20%	50V
C005	CE04W2E100	CAP. ELECTRO	10		250V
C006	CQ93FM1H104K	CAP. MYLAR	0.1	10%	50V
C007	CQ93FM1H153K	CAP. MYLAR	0.015	10%	50V
C008	CE04W1V471M	CAP. ELECTRO	470	20%	35V
C009	CQ93FM1H104K	CAP. MYLAR	0.1	10%	50V
C010	CQ93FM1H223K	CAP. MYLAR	0.022	10%	50V
C011	CK45B2H102K	CAP. CERAMIC	1000P	10%	500V
C012	CK45E3F332P	CAP. CERAMIC	3300P		3.1K
C013	CK45E3F332P	CAP. CERAMIC	3300P		3.1K
C014	NO USE				
C015	CE04W2E010	CAP. ELECTRO	1		250V
C016	CE04W2E4R7	CAP. ELECTRO	4.7		250V
C017	CK45B2H472K	CAP. CERAMIC	4700P	10%	500V
C018	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C019	CC45FCH1H100D	CAP. CERAMIC	10P	0.5P	50V
C020	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C021	CK45B2H103K	CAP. CERAMIC	0.01	10%	500V
C022	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C023	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C024	C90-0912-05	CAP. ELECTRO	220	20%	35V
C025	C90-0912-05	CAP. ELECTRO	220	20%	35V
C026	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C027	CK45B2H472K	CAP. CERAMIC	4700P	10%	500V
C028	CE04W2A3R3M	CAP. ELECTRO	3.3	20%	100V
C029	C91-0570-05	CAP. CERAMIC	4700P		3KV
C030	CK45E3F102P	CAP. CERAMIC	1000P		3.1K
C031	CC45CH1H180J	CAP. CERAMIC	18P	5%	50V
C101	CQ93FM1H103K	CAP. MYLAR	0.01	10%	50V
C102	CQ93FM1H103K	CAP. MYLAR	0.01	10%	50V
C103	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C104	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C105	CC45CH1H221J	CAP. CERAMIC	220P	5%	50V
C106	CE04W1H100M	CAP. ELECTRO	10	20%	50V
C107	NO USE				
C108	C90-0298-05	CAP. CERAMIC	0.1	20%	12V
C109	CK45B1H472K	CAP. CERAMIC	4700P	10%	50V
C110	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C111	CC45CH1H101J	CAP. CERAMIC	100P	5%	50V
C112	CK45F1H103Z	CAP. CERAMIC	0.01		50V

REF.NO	PARTS NO	NAME & DESCRIPTION			
C113	CC45CH1H101J	CAP. CERAMIC	100P	5%	50V
C114	CE04BW1H010M	CAP. ELECTRO	1	20%	50V
C115	CE04W1A101M	CAP. ELECTRO	100	20%	10V
C116	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C117	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C118	CC45CH2H100D	CAP. CERAMIC	10P	0.5P	500V
C119	CC45CH2H100D	CAP. CERAMIC	10P	0.5P	500V
C120	CF93AN2A105J	CAP. POLYESTHEL	1	5%	100V
C121	CQ93BP2A103F	CAP. MYLAR	0.01	1%	100V
C122	CM93BD2A900J	CAP. MICA	90P	5%	100V
C123	CQ93FM1H102K	CAP. MYLAR	1000P	10%	50V
C124	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C125	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C126	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C127	NO USE				
C128	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C129	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C130	NO USE				
C131	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C132	NO USE				
C133	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C134	CC45FCH1H470J	CAP. CERAMIC	47P	5%	50V
C135	CC45CH2H030C	CAP. CERAMIC	3P	0.25P	500V
C136	CM93BD2A151J	CAP. MICA	150P	5%	100V
C139	CC45CH2H020C	CAP. CERAMIC	2P	0.25P	500V
C140	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C141	CK45FB1H102K	CAP. CERAMIC	1000P	10%	50V
C142	CC45CH1H221J	CAP. CERAMIC	220P	5%	50V
C143	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C144	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C145	C90-0298-05	CAP. CERAMIC	0.1	20%	12V
C146	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C147	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C148	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C149	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C150	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C151	CE04W1A221M	CAP. ELECTRO	220	20%	10V
C152	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C153	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C154	CE04W2E4R7	CAP. ELECTRO	4.7		250V
C155	CK45B2H472K	CAP. CERAMIC	4700P	10%	500V
C158	CC45FCH1H150J	CAP. CERAMIC	15P	5%	50V
C159	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C160	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C161	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C162	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C163	CC45FCH1H100D	CAP. CERAMIC	10P	0.5P	50V
C164	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C165	CC45CH1H151J	CAP. CERAMIC	150P	5%	50V
C166	NO USE				
C167	CC45CH1H221J	CAP. CERAMIC	220P	5%	50V
C168	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C173	C90-0298-05	CAP. CERAMIC	0.1	20%	12V
C174	C90-0298-05	CAP. CERAMIC	0.1	20%	12V
C175	NO USE				
C176	CK45B1H152K	CAP. CERAMIC	1500P	10%	50V
D001	DS442X	DIODE, SILICON	SWITCHING		
D002	DS442X	DIODE, SILICON	SWITCHING		
D003	W02-0409-05	HIGH VOLTAGE POWER BLOCK			
D004	W06C	DIODE			
D005	W06C	DIODE			
D006	1SS83	DIODE			
D007	1SS83	DIODE			
D008	DS442X	DIODE, SILICON	SWITCHING		
D009	DS442X	DIODE, SILICON	SWITCHING		
D101	DS442X	DIODE, SILICON	SWITCHING		
D102	NO USE				
D103	DS442X	DIODE, SILICON	SWITCHING		
D104	DS442X	DIODE, SILICON	SWITCHING		
D105	DS442X	DIODE, SILICON	SWITCHING		
D106	DS442X	DIODE, SILICON	SWITCHING		
D107	DS442X	DIODE, SILICON	SWITCHING		
D108	DS442X	DIODE, SILICON	SWITCHING		
D109	DS442X	DIODE, SILICON	SWITCHING		
D110	DS442X	DIODE, SILICON	SWITCHING		
D111	DS442X	DIODE, SILICON	SWITCHING		
D112	DS442X	DIODE			
D113	DS442X	DIODE			
D114	NO USE				
D115	DS442X	DIODE			
D116	1SS83	DIODE			
D117	MTZ5.1JB	DIODE ZENER	5V		
D121	DS442X	DIODE, SILICON	SWITCHING		
D122	NO USE				
D123	1SS83	DIODE			
D124	DS442X	DIODE			
D125	DS442X	DIODE			
L001	L40-1011-13	FERRI INDUCTOR	100UH		
L002	L40-1011-13	FERRI INDUCTOR	100UH		
L003	L40-1021-03	FERRI INDUCTOR	1MH		
L004	L40-1021-13	FERRI INDUCTOR	1MH		

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION
L005	L40-1021-13	FERRI INDUCTOR 1MH
L006	L40-1021-13	FERRI INDUCTOR 1MH
L007	L40-1021-13	FERRI INDUCTOR 1MH
L008	L40-4791-02	FERRI INDUCTOR 4.7UH
L101	L40-1011-13	FERRI INDUCTOR 100UH
NL001	NE-2B	NEON LAMP
NL002	NE-2B	NEON LAMP
P001	E40-0274-05	PIN CONNECTOR 2 P
P002	E40-0374-05	PIN CONNECTOR 3 P
P003	E40-0335-05	PIN CONNECTOR 3 P
P004	E40-0535-05	PIN CONNECTOR 5 P
P005	E40-0233-05	PIN CONNECTOR 2 P
P101	E40-1116-05	PIN CONNECTOR 11 P
P102	E40-1116-05	PIN CONNECTOR 11 P
P103	E40-0273-05	PIN CONNECTOR 2 P
Q001	2SC2912(S)	TR. SI, NPN
Q002	2SA1210(S)	TR. SI, PNP
Q003	2SD613(E)	TR. SI, NPN
Q004	2SC2785(F)	TR. SI, NPN
Q005	2SC2271(D)	TR. SI, NPN
Q101	2SK117(Y)	FET
Q102	2SK117(Y)	FET
Q103	2SC2785(F)	TR. SI, NPN
Q104	2SC2785(F)	TR. SI, NPN
Q105	2SC2785(F)	TR. SI, NPN
Q106	2SC2785(F)	TR. SI, NPN
Q107	2SA1175(F)	TR. SI, PNP
Q108	2SA1175(F)	TR. SI, PNP
Q109	2SA838(C)	TR. SI, PNP
Q110	2SA838(C)	TR. SI, PNP
Q111	2SA1175(F)	TR. SI, PNP
Q112	2SA1175(F)	TR. SI, PNP
Q113	2SC2785(F)	TR. SI, NPN
Q114	2SC2785(F)	TR. SI, NPN
Q115	2SK117(Y)	FET
Q116	2SC2785(F)	TR. SI, NPN
Q117	2SC2785(F)	TR. SI, NPN
Q118	2SC2785(F)	TR. SI, NPN
Q119	2SC2785(F)	TR. SI, NPN
Q120	2SC2785(F)	TR. SI, NPN
Q121	2SA1175(F)	TR. SI, PNP
Q122	2SA1175(F)	TR. SI, PNP
Q123	2SA1175(F)	TR. SI, PNP
Q124	2SC2912(S)	TR. SI, NPN
Q125	2SA1210(S)	TR. SI, PNP
Q126	2SC2785(F)	TR. SI, NPN
Q127	2SC2912(S)	TR. SI, NPN
Q128	2SC2785(F)	TR. SI, NPN
Q129	2SC2785(F)	TR. SI, NPN
R001	RN14BK2E4701F	RES. METAL FILM 4.7K 1% 1/4W
R002	RD14BB2E221J	RES. CARBON 220 5% 1/4W
R003	RD14BB2E183J	RES. CARBON 18K 5% 1/4W
R004	RD14BB2E104J	RES. CARBON 100K 5% 1/4W
R005	RN14BK2E4702F	RES. METAL FILM 47K 1% 1/4W
R006	RD14BB2E101J	RES. CARBON 100 5% 1/4W
R007	RN14BK2E2403F	RES. METAL FILM 240K 1% 1/4W
R008	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R009	RD14BB2E104J	RES. CARBON 100K 5% 1/4W
R010	RD14BB2E332J	RES. CARBON 3.3K 5% 1/4W
R011	RD14BB2E221J	RES. CARBON 220 5% 1/4W
R012	RD14BB2E103J	RES. CARBON 10K 5% 1/4W
R013	R92-1033-05	RES. FIXED 33M 5% 1/4W
R014	RD14BB2E334J	RES. CARBON 330K 5% 1/4W
R015	R92-1034-05	RES. METAL FILM 47M 5% 1/2W
R016	R92-1026-05	RES. METAL FILM 3.3M
R017	R92-1032-05	RES. FIXED 22M
R018	RD14BB2E473J	RES. CARBON 47K 5% 1/4W
R019	RD14BB2E393J	RES. CARBON 39K 5% 1/4W
R020	RD14BB2E333J	RES. CARBON 33K 5% 1/4W
R021	RD14BB2E473J	RES. CARBON 47K 5% 1/4W
R022	RD14BB2E103J	RES. CARBON 10K 5% 1/4W
R023	RD14BB2E222J	RES. CARBON 2.2K 5% 1/4W
R024	RN14BK2E6800F	RES. METAL FILM 680 1% 1/4W
R025	RN14BK2E2402F	RES. METAL FILM 24K 1% 1/4W
R026	RN14BK2E1302F	RES. METAL FILM 13K 1% 1/4W
R027	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R028	RD14BB2E562J	RES. CARBON 5.6K 5% 1/4W
R029	RD14BB2E4R7J	RES. CARBON 4.7 5% 1/4W
R030	NO USE	
R031	RD14BB2E470J	RES. CARBON 47 5% 1/4W
R032	RD14BB2E224J	RES. CARBON 220K 5% 1/4W
R033	RD14BB2E563J	RES. CARBON 56K 5% 1/4W
R101	RN14BK2E1004F	RES. METAL FILM 1M 1% 1/4W
R102	RD14BB2E104J	RES. CARBON 100K 5% 1/4W
R103	RD14BB2E153J	RES. CARBON 15K 5% 1/4W
R104	RD14BB2E153J	RES. CARBON 15K 5% 1/4W
R105	RD14BB2E201J	RES. CARBON 200 5% 1/4W
R106	RD14BB2E302J	RES. CARBON 3K 5% 1/4W
R107	RN14BK2E3301F	RES. METAL FILM 3.3K 1% 1/4W
R108	RN14BK2E3300F	RES. METAL FILM 330 1% 1/4W
R109	RN14BK2E3600F	RES. METAL FILM 360 1% 1/4W
R110	RN14BK2E4701F	RES. METAL FILM 4.7K 1% 1/4W
R111	RN14BK2E5101F	RES. METAL FILM 5.1K 1% 1/4W
R112	RD14BB2E103J	RES. CARBON 10K 5% 1/4W
R113	RD14BB2E183J	RES. CARBON 18K 5% 1/4W
R114	RD14BB2E222J	RES. CARBON 2.2K 5% 1/4W
R115	RD14BB2E222J	RES. CARBON 2.2K 5% 1/4W
R116	RD14BB2E222J	RES. CARBON 2.2K 5% 1/4W
R117	RD14BB2E472J	RES. CARBON 4.7K 5% 1/4W
R118	RD14BB2E105J	RES. CARBON 1M 5% 1/4W
R119	RD14BB2E622J	RES. CARBON 6.2K 5% 1/4W
R120	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R121	RD14BB2E472J	RES. CARBON 4.7K 5% 1/4W
R122	RN14BK2E2701F	RES. METAL FILM 2.7K 1% 1/4W
R123	RN14BK2E3600F	RES. METAL FILM 360 1% 1/4W
R124	RN14BK2E3600F	RES. METAL FILM 360 1% 1/4W
R125	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R126	RN14BK2E1002F	RES. METAL FILM 10K 1% 1/4W
R127	RN14BK2E2701F	RES. METAL FILM 2.7K 1% 1/4W
R128	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R129	RD14BB2E561J	RES. CARBON 560 5% 1/4W
R130	RD14BB2E182J	RES. CARBON 1.8K 5% 1/4W
R131	RD14BB2E681J	RES. CARBON 680 5% 1/4W
R132	RD14BB2E472J	RES. CARBON 4.7K 5% 1/4W
R133	RD14BB2E222J	RES. CARBON 2.2K 5% 1/4W
R134	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R135	RD14BB2E472J	RES. CARBON 4.7K 5% 1/4W
R136	RD14BB2E222J	RES. CARBON 2.2K 5% 1/4W
R137	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R138	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R139	RD14BB2E562J	RES. CARBON 5.6K 5% 1/4W
R140	RD14BB2E221J	RES. CARBON 220 5% 1/4W
R141	RD14BB2E221J	RES. CARBON 220 5% 1/4W
R142	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R143	RD14BB2E472J	RES. CARBON 4.7K 5% 1/4W
R144	RD14BB2E103J	RES. CARBON 10K 5% 1/4W
R145	RD14BB2E182J	RES. CARBON 1.8K 5% 1/4W
R146	RD14BB2E472J	RES. CARBON 4.7K 5% 1/4W
R147	RN14BK2E3302F	RES. METAL FILM 33K 1% 1/4W
R148	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R149	RN14BK2E3602F	RES. METAL FILM 36K 1% 1/4W
R150	RS14GB3D183J	RES. METAL FILM 18K 5% 2W
R151	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R152	RD14BB2E153J	RES. CARBON 15K 5% 1/4W
R153	RD14BB2E153J	RES. CARBON 15K 5% 1/4W
R154	RD14BB2E133J	RES. CARBON 13K 5% 1/4W
R155	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
R156	RN14BK2E1201F	RES. METAL FILM 1.2K 1% 1/4W
R157	RN14BK2E1201F	RES. METAL FILM 1.2K 1% 1/4W
R158	RN14BK2E4301F	RES. METAL FILM 4.3K 1% 1/4W
R159	RN14BK2E9101F	RES. METAL FILM 9.1K 1% 1/4W
R160	RN14BK2E3004F	RES. METAL FILM 3M 1% 1/4W
R161	RN14BK2E1004F	RES. METAL FILM 1M 1% 1/4W
R162	RN14BK2E5003F	RES. METAL FILM 500K 1% 1/4W
R163	RN14BK2E3003F	RES. METAL FILM 300K 1% 1/4W
R164	RN14BK2E1003F	RES. METAL FILM 100K 1% 1/4W
R165	RN14BK2E5002F	RES. METAL FILM 50K 1% 1/4W
R166	RN14BK2E3002F	RES. METAL FILM 30K 1% 1/4W
R167	RN14BK2E2002F	RES. METAL FILM 20K 1% 1/4W
R168	RD14BB2E472J	RES. CARBON 4.7K 5% 1/4W
R169	RD14BB2E222J	RES. CARBON 2.2K 5% 1/4W
R170	RD14BB2E472J	RES. CARBON 4.7K 5% 1/4W
R171	RN14BK2E4701F	RES. METAL FILM 4.7K 1% 1/4W
R172	RD14BB2E472J	RES. CARBON 4.7K 5% 1/4W
R173	RD14BB2E101J	RES. CARBON 100 5% 1/4W
R174	RD14BB2E391J	RES. CARBON 390 5% 1/4W
R175	RN14BK2E2201F	RES. METAL FILM 2.2K 1% 1/4W
R176	RN14BK2E2201F	RES. METAL FILM 2.2K 1% 1/4W
R177	RD14BB2E182J	RES. CARBON 1.8K 5% 1/4W
R178	RD14BB2E182J	RES. CARBON 1.8K 5% 1/4W
R179	RD14BB2E103J	RES. CARBON 10K 5% 1/4W
R180	RN14BK2E1202F	RES. METAL FILM 12K 1% 1/4W
R181	RD14BB2E822J	RES. CARBON 8.2K 5% 1/4W
R182	RD14BB2E103J	RES. CARBON 10K 5% 1/4W
R183	RD14BB2E124J	RES. CARBON 120K 5% 1/4W
R184	RD14BB2E621J	RES. CARBON 620 5% 1/4W
R185	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R186	RD14BB2E473J	RES. CARBON 47K 5% 1/4W
R187	RD14BB2E203J	RES. CARBON 20K 5% 1/4W
R188	RD14BB2E103J	RES. CARBON 10K 5% 1/4W
R189	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R190	RS14GB3D103J	RES. METAL FILM 10K 5% 2W
R191	RD14BB2E124J	RES. CARBON 120K 5% 1/4W
R192	RD14BB2E103J	RES. CARBON 10K 5% 1/4W
R193	RD14BB2E122J	RES. CARBON 1.2K 5% 1/4W
R194	RD14BB2E122J	RES. CARBON 1.2K 5% 1/4W
R195	RD14BB2E821J	RES. CARBON 820 5% 1/4W
R196	RD14BB2E821J	RES. CARBON 820 5% 1/4W
R197	NO USE	
R198	RD14BB2E222J	RES. CARBON 2.2K 5% 1/4W
R199	RD14BB2E221J	RES. CARBON 220 5% 1/4W
R205	RD14BB2E102J	RES. CARBON 1K 5% 1/4W
R206	NO USE	
R207	RN14BK2E9101F	RES. METAL FILM 9.1K 1% 1/4W

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION			
R210	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R211	RD14BB2E470J	RES. CARBON	47	5%	1/4W
R212	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R213	RD14BB2E152J	RES. CARBON	1.5K	5%	1/4W
R214	RN14BK2E5101F	RES. METAL FILM	5.1K	1%	1/4W
R217	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R221	RD14BB2E133J	RES. CARBON	13K	5%	1/4W
R222	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R223	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R224	NO USE				
R225	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R226	NO USE				
R227	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R228	RD14BB2C133J	RES. CARBON	13K	5%	1/6W
S103	S02-2507-15	ROTARY SW. W/V.R2K B			
S104	S33-2501-05	LEVER SWITCH			
S105	S32-2012-05	LEVER SWITCH			
S106	S32-4007-05	LEVER SWITCH			
T001	L19-0413-05	CONVERTOR TRANSFORMER			
TC101	C05-0422-05	CAP. TRIMMER	20P		
TC102	C05-0420-05	CAP. TRIMMER	6P		
U001	NJM4558D	IC			
U101	MC10103L	IC, QUAD 2-INPUT OR GATE			
U102	SN74LS112N	IC			
U103	SN74LS02N	IC			
U104	SN74LS00N	IC			
U105	SN74LS08N	IC			
VR001	R12-5516-05	RES. SEMI FIXED 100K B			
VR101	R01-3510-05	V.R. WITH SW.	10K B		
VR102	R01-3510-05	V.R. WITH SW.	10K B		
VR103	S02-2507-15	ROTARY SW. W/V.R2K B			
VR104	R12-3520-05	RES. SEMI FIXED 10K B			
VR105	R12-1518-05	RES. SEMI FIXED 2K B			
VR106	R12-0421-05	RES. SEMI FIXED 100 B			
VR107	R12-1517-05	RES. SEMI FIXED 1K B			
VR108	NO USE				
VR109	R12-5518-05	RES. SEMI FIXED 200K B			
VR110	NO USE				
VR111	R12-0540-05	RES. SEMI FIXED 500 B			

V. FINAL AMP UNIT

(X73-1630-00)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	F01-0821-04	HEAT SINK			
	F02-0514-04	HEAT SINK			
	J21-2950-04	BRACKET FOR P.C.B			
	J21-2951-04	BRACKET FOR P.C.B			
	J25-5097-04	PCB (UNMOUNTED)			
	J32-0780-04	BOSS			
	J61-0516-05	SUPPORT (T TYPE)			
	N09-0709-05	SCREW			
	N30-3004-46	SCREW, PAN HD	M 3X4		
	N30-3006-46	SCREW, PAN HD	M 3X6		
	N30-3008-46	SCREW, PAN HD	M 3X8		
	R92-0150-05	JUMPING RES.	ZERO OHM		
C001	CK45B2H472K	CAP. CERAMIC	4700P	10%	500V
C002	CE04W2C3R3	CAP. ELECTRO	3.3		160V
C003	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C004	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C005	CK45B1H472K	CAP. CERAMIC	4700P	10%	50V
C006	CK45B1H472K	CAP. CERAMIC	4700P	10%	50V
C007	CK45B1H472K	CAP. CERAMIC	4700P	10%	50V
C008	CK45B1H472K	CAP. CERAMIC	4700P	10%	50V
D001	DS442X	DIODE			
D002	DS442X	DIODE			
D003	DS442X	DIODE			
D004	DS442X	DIODE			
P001	E40-0202-05	PIN CONNECTOR	2 P		
P002	E40-0202-05	PIN CONNECTOR	2 P		
P003	E40-0374-05	PIN CONNECTOR	3 P		
P004	E40-0274-05	PIN CONNECTOR	2 P		
Q001	2SC2912(R,S)	TR. SI, NPN			
Q002	2SC2912(R,S)	TR. SI, NPN			
Q003	2SA1210(S)	TR. SI, PNP			
Q004	2SC2912(R,S)	TR. SI, NPN			
Q005	2SA1210(S)	TR. SI, PNP			
Q006	2SC2912(R,S)	TR. SI, NPN			
R001	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R002	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R003	R92-1130-05	RES. FIXED	2.4K		3W
R004	R92-1130-05	RES. FIXED	2.4K		3W
R005	RD14BB2E470J	RES. CARBON	47	5%	1/4W
R006	RD14BB2E470J	RES. CARBON	47	5%	1/4W
R007	RD14BB2E470J	RES. CARBON	47	5%	1/4W
R008	RD14BB2E470J	RES. CARBON	47	5%	1/4W
R009	RD14BB2E150J	RES. CARBON	15	5%	1/4W
R010	RD14BB2E150J	RES. CARBON	15	5%	1/4W
R011	RD14BB2E150J	RES. CARBON	15	5%	1/4W
R012	RD14BB2E150J	RES. CARBON	15	5%	1/4W

CONNECTION UNIT

(X77-1261-61)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	E33-4037-00	WIRE ASSY			
	J25-2995-03	PCB (UNMOUNTED)			
	R92-0150-05	JUMPING RES.	ZERO OHM		
C001	CQ93M1H103J	CAP. MYLAR	0.01	5%	50V
C002	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
D001	DS442X	DIODE			
D002	DS442X	DIODE			
P001	E40-7203-05	PIN CONNECTOR	3 P		
P002	E40-7204-05	PIN CONNECTOR	4 P		
P003	E40-0604-05	PIN CONNECTOR	6 P		
P004	E40-0804-05	PIN CONNECTOR	8 P		
P005	E40-0804-05	PIN CONNECTOR	8 P		
P006	E40-1111-05	PIN CONNECTOR	11P		
P007	E40-1111-05	PIN CONNECTOR	11P		
P008	E40-1111-05	PIN CONNECTOR	11P		
P009	E40-1111-05	PIN CONNECTOR	11P		
P010	E40-0273-05	PIN CONNECTOR	2 P		
P013	E40-0273-05	PIN CONNECTOR	2 P		
P014	E40-0273-05	PIN CONNECTOR	2 P		
P015	E40-0673-05	PIN CONNECTOR	6 P		
Q001	2SC1384	TR. SI, NPN			
Q002	2SA684	TR. SI, PNP			
R001	RD14BB2E331J	RES. CARBON	330	5%	1/4W
R002	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R003	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R004	RD14BB2E103J	RES. CARBON	10K	5%	1/4W
R005	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R006	RN14BK2E1300F	RES. METAL FILM	130	1%	1/4W
R007	RN14BK2E4302F	RES. METAL FILM	43K	1%	1/4W
R008	RN14BK2E9102F	RES. METAL FILM	91K	1%	1/4W

PARTS LIST


REF.NO	PARTS NO	NAME & DESCRIPTION			
R009	RN14BK2E1003F	RES. METAL FILM	100K	1%	1/4W
R010	RN14BK2E3601F	RES. METAL FILM	3.6K	1%	1/4W
R011	RD14BB2E392J	RES. CARBON	3.9K	5%	1/4W
R014	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R015	RD14BB2E101J	RES. CARBON	100	5%	1/4W
U001	NJM4558D	IC			

CRT SOCKET UNIT


(X81-1250-04)

REF.NO	PARTS NO	NAME & DESCRIPTION		
	E01-0103-05	CRT SOCKET		
	J25-2996-24	PCB (UNMOUNTED)		
	R92-0150-05	JUMPING RES.	ZERO OHM	
C001	CC45CH2H010C	CAP. CERAMIC	1P	0.25% 500V
C002	CC45SL1H050C	CAP. CERAMIC	5P	0.25P 50V
J016	E31-2390-15	LEAD WIRE WITH CONNECTOR		
J017	E31-2390-15	LEAD WIRE WITH CONNECTOR		
J018	NO USE			
J019	E31-2364-05	LEAD WIRE WITH CONNECTOR		
J020	NO USE			
J021	E31-2363-05	LEAD WIRE WITH CONNECTOR		
J022	NO USE			
J023	E31-2365-05	LEAD WIRE WITH CONNECTOR		


SEMICONDUCTORS




SN74LS112N




LS74LS02N




SN74LS00N




NJM4558D



SN74LS08N




MC10103L




M47F(B)
M47F(C)


Bottom View




2SA684 2SC1384
2SA838 (C) 2SC2271 (D or E)
2SA1005 (K)




2SK30A (O)




2SA1175 (F)
2SC2785 (F)
2SC2786 (K)




2SC2407




2SK117 (Y)




μPC7805H
NJM7815




2SA1210 (R or S)
2SC2912 (R or S)



2SA1009 (L, K)
2SD613E




μPC7915HA




2SA884

DISASSEMBLY

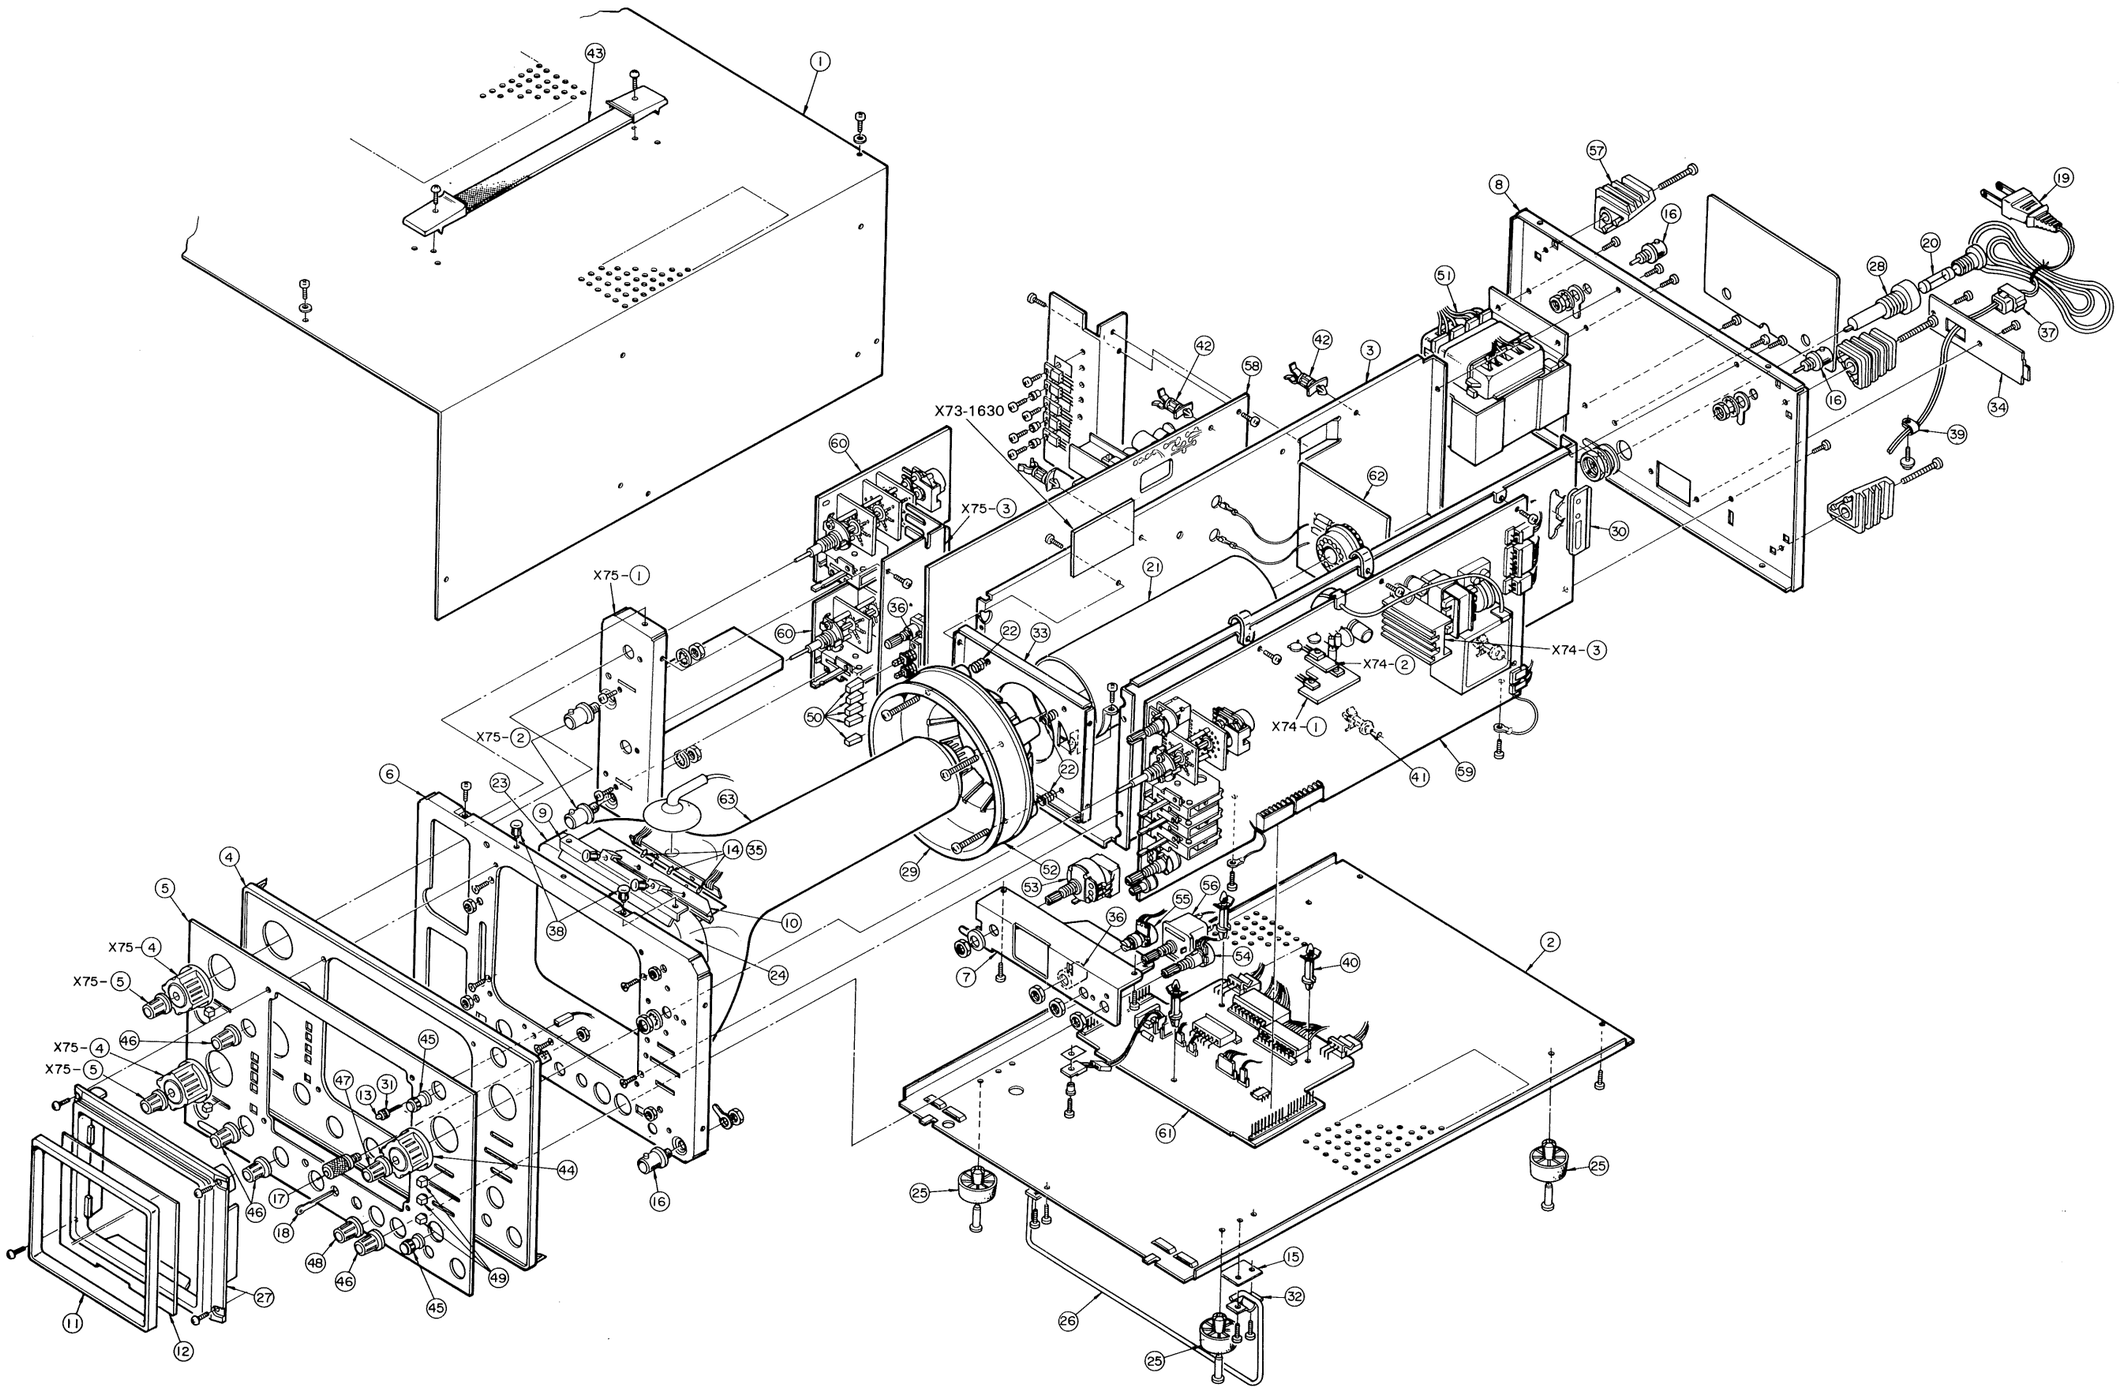


P.C. BOARD


VERTICAL ATTENUATOR UNIT (X75-1140-00)

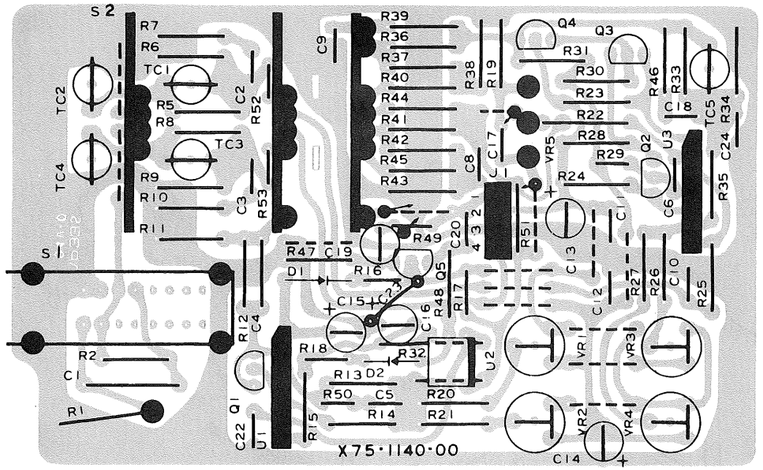


CONNECTION UNIT (X77-1260-00)

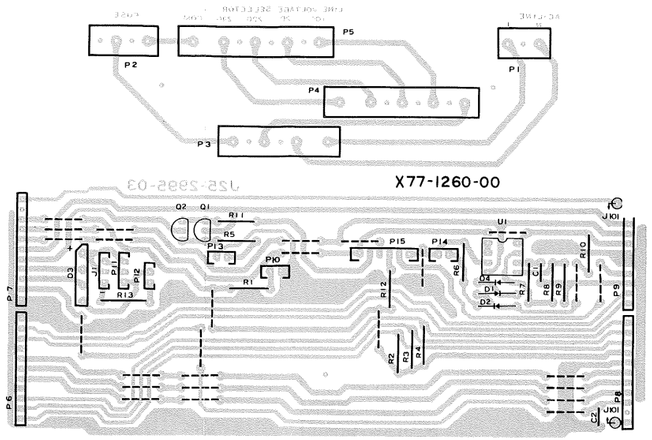


HORIZONTAL & HIGH VOLTAGE UNIT (X74-1340-00)

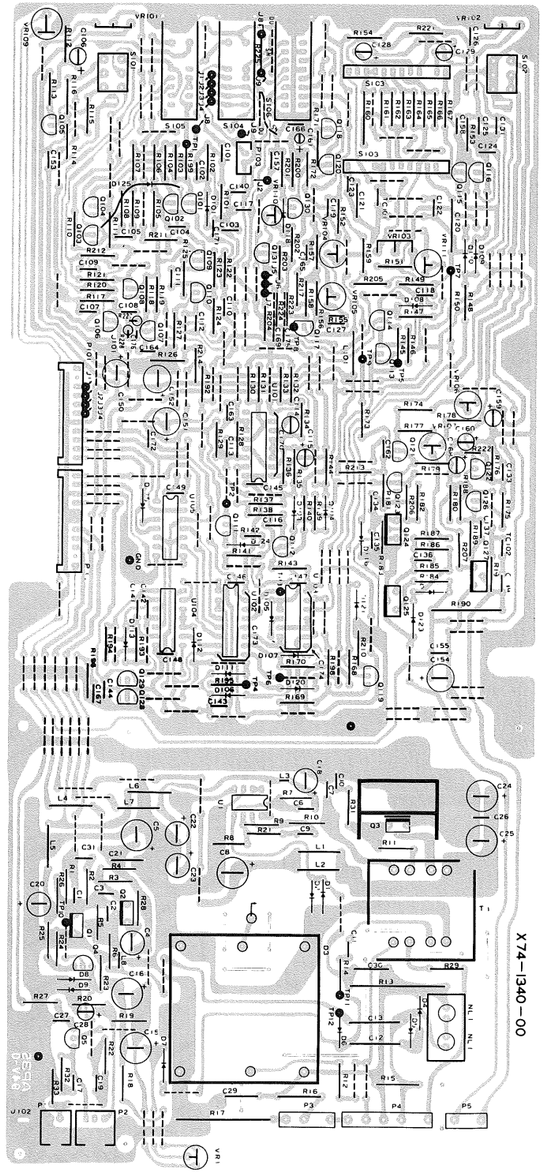


VERTICAL AMP & POWER UNIT (X73-1490-00)

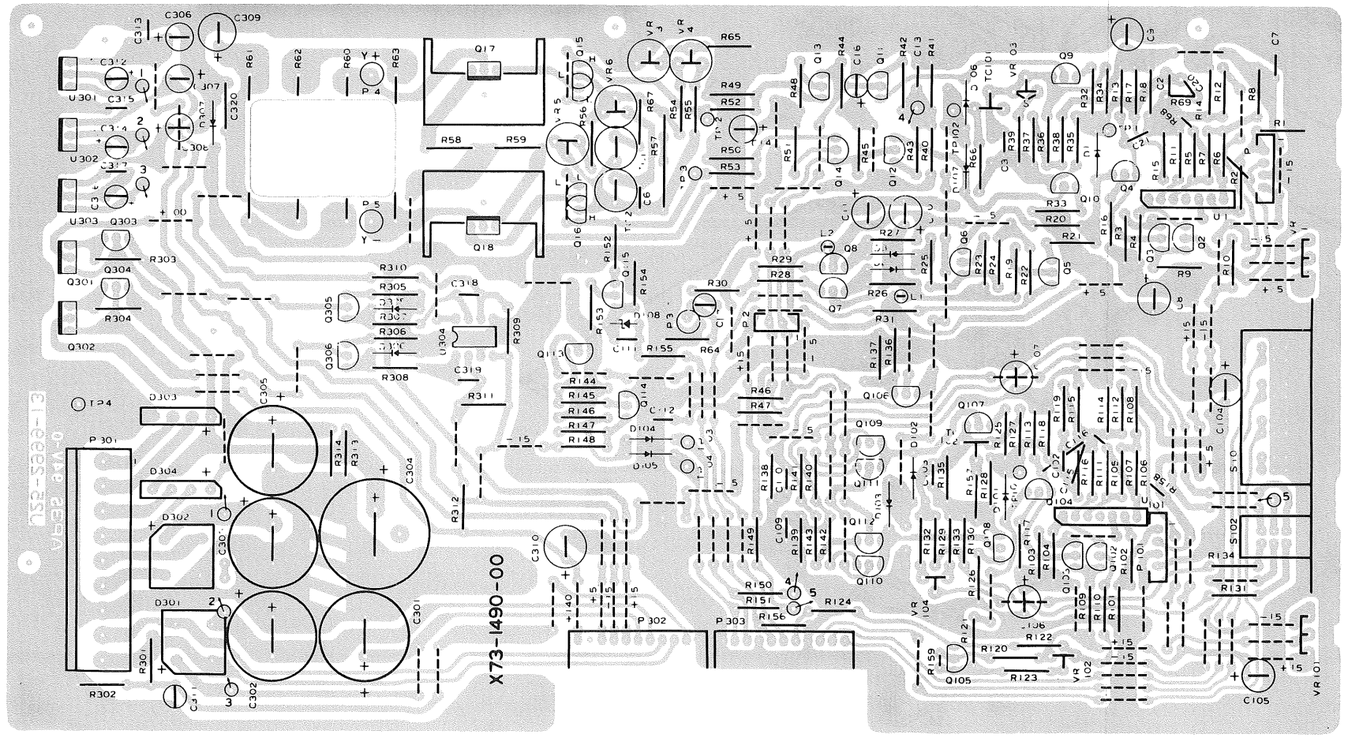


CRT SOCKET UNIT (X81-1250-00)




V. FINAL AMP UNIT (X73-1630-00)



CS-1022 SCHEMATIC DIAGRAM

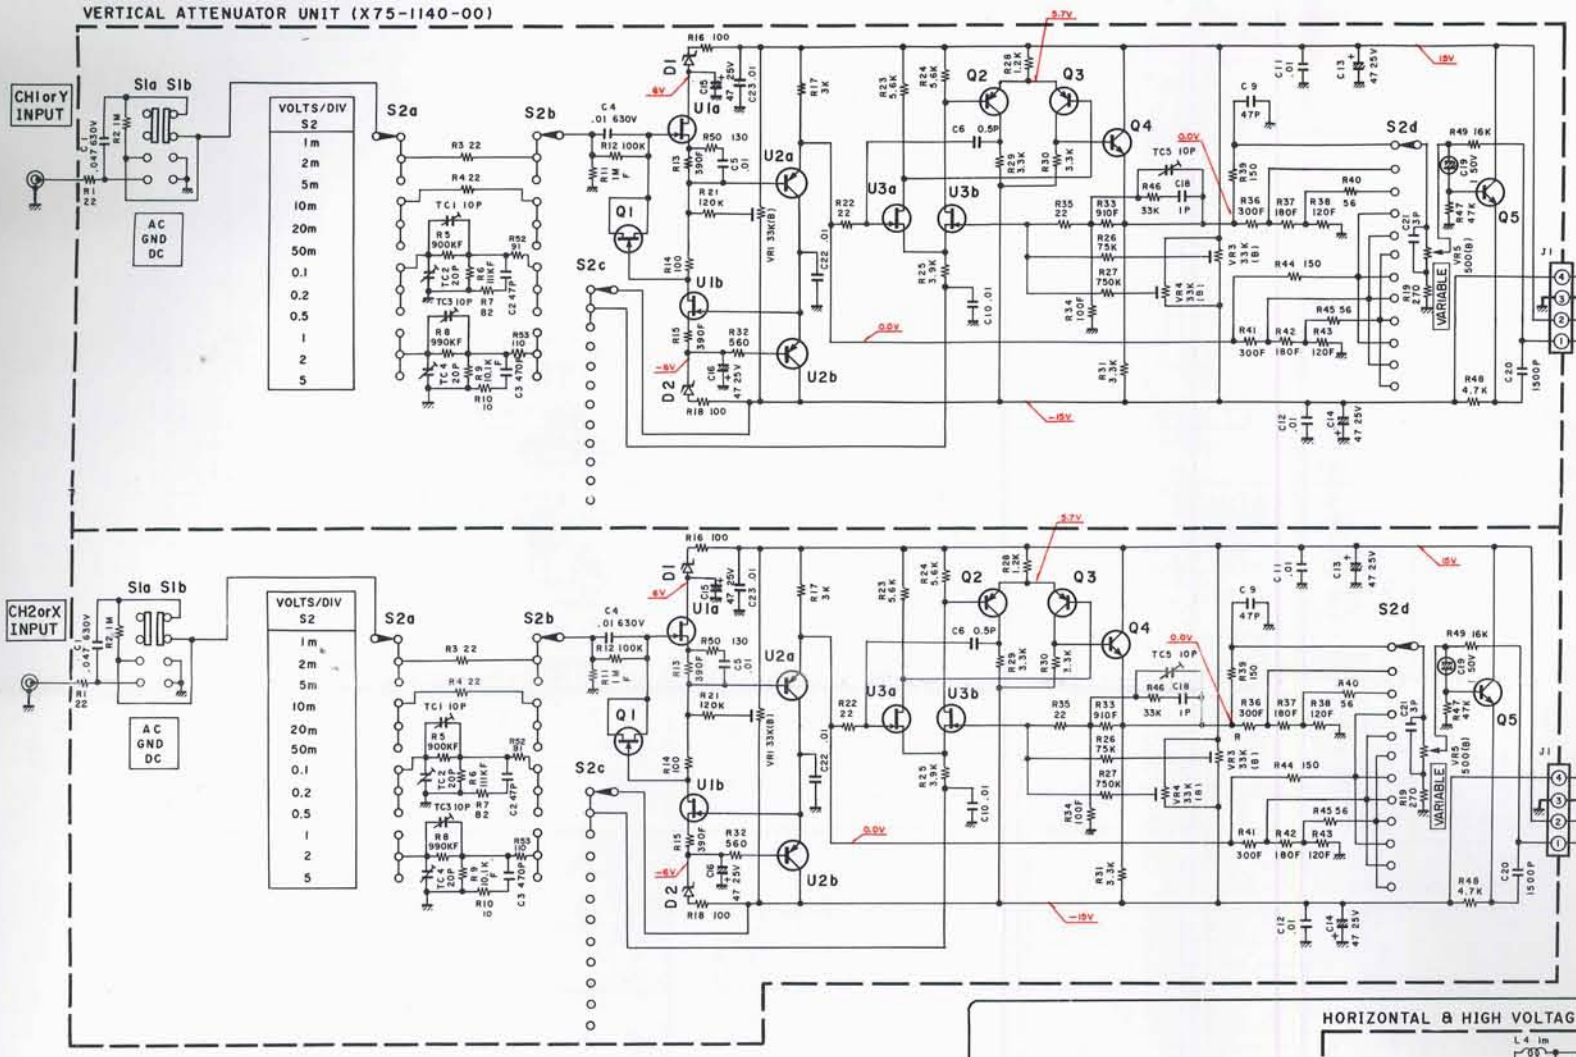


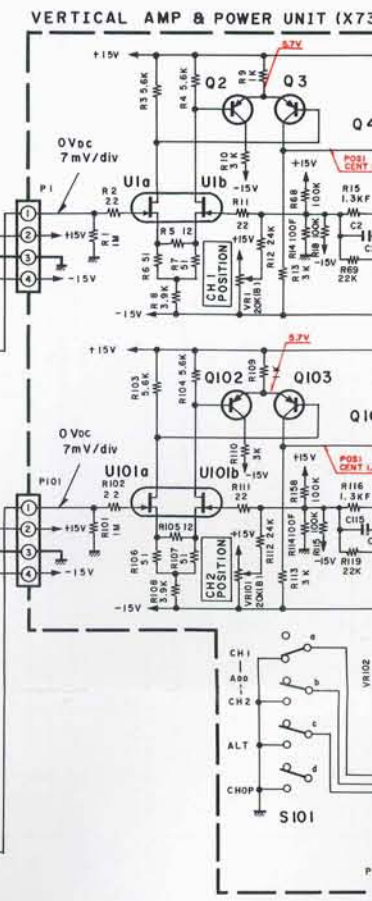

(X75-1140-00)
Q1 : 2SK30A(O)
Q2,3 : 2SA1005(K)
Q4,5 : 2SC2786(K)


D1,2 : MTZ9.1JC

U1 : M47F(C)
U2 : 2SA884
U3 : M47F(B)

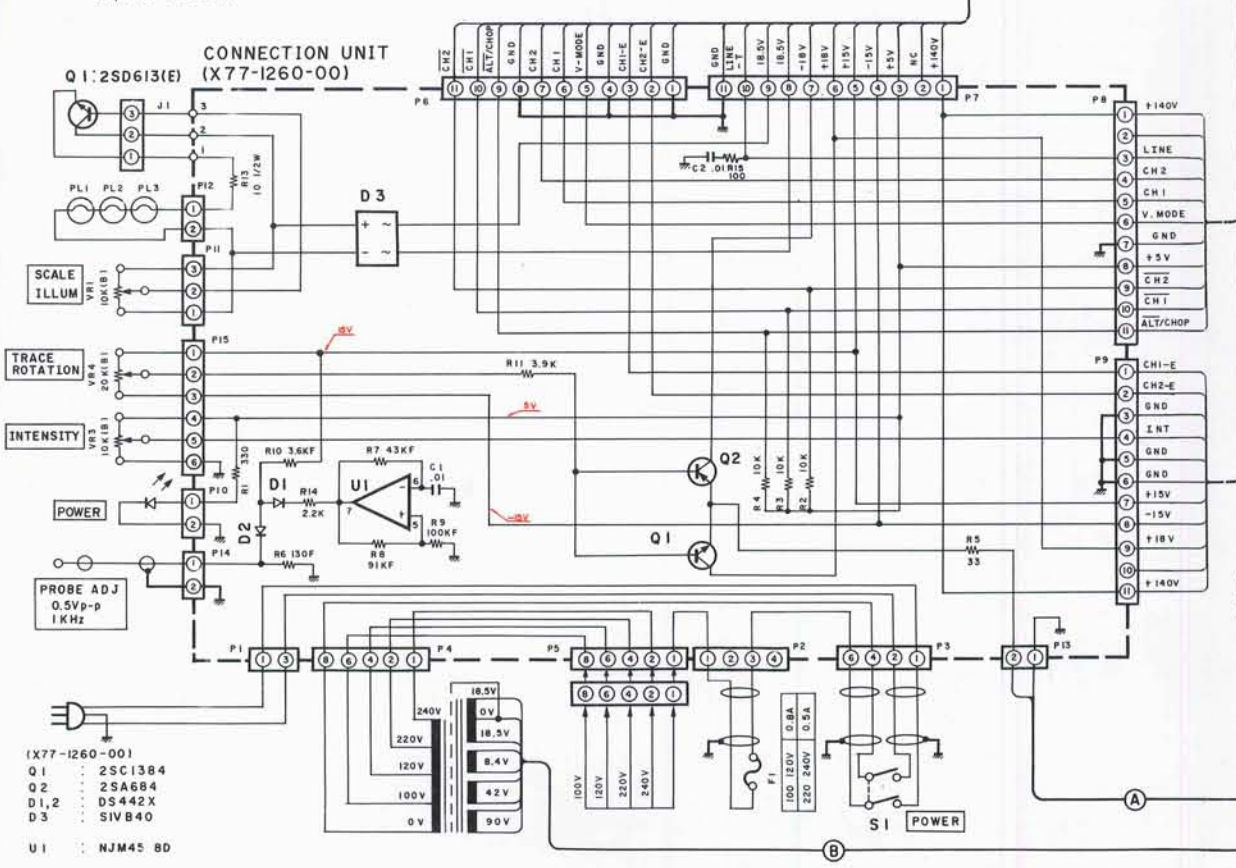

(X77-1260-00)
Q1 : 2SC1384
Q2 : 2SA684
D1,2 : DS442X
D3 : SIV840

U1 : NJM45 8D

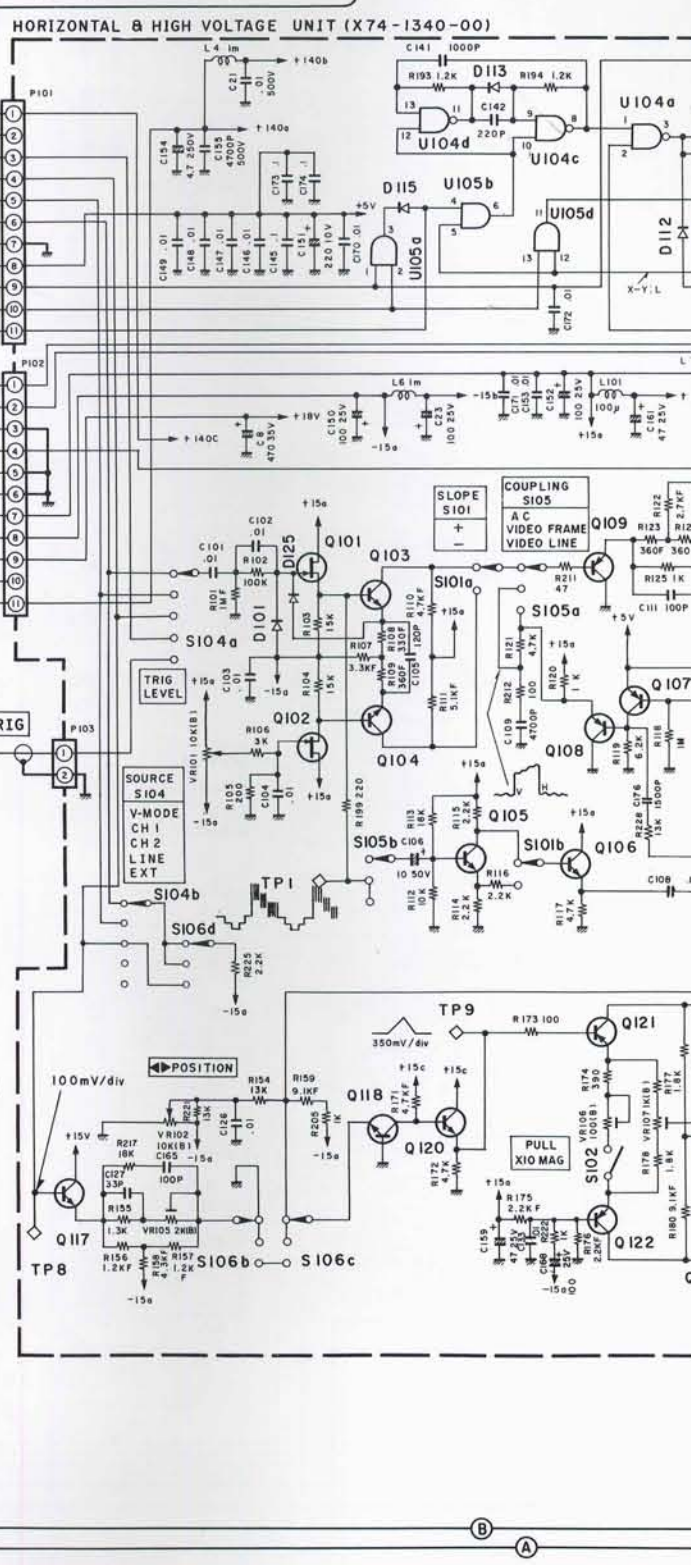

VERTICAL AMP & POWER UNIT (X73-1490-00)

VOLTAGE UNIT (X74-1340-00)

CH1 OUTPUT

Q2,3,8,102,103	2SA1005(K)	D1~3,101~107,305,306	DS442X
Q4~7,9~14,104, 105,107~112,115	2SC2786(K)	D301,302	S2VB40F
Q15,16	2SC2407	D303,304	SIVB60
Q17,18	2SC2912(R,S)	D307	V06B
Q106,114	2SC2785(F)	U1,101	M47F(B)
Q113,303,304	2SA1175(F)	U301	μPC7805H
Q301,302	2SA1009(L,K)	U302	μPC7915HA
Q305,306	2SC2271(E)	U303	NJM78I5
		U304	NJM4558D
		D108	MTZ10JC


CRT 150FTM31

CRT SOCKET UNIT (X81-1250-00)

(X74-1340-00)

U1	NJM4558D
U101	MC10103L
U102	SN74LS112N
U103	SN74LS02N
U104	SN74LS00N
U105	SN74LS08N
Q1,124,127	2SC2912(S)
Q2,125	2SA1210(S)
Q3	2SD613(E)
Q4,103~106,113,114,116~120,126,128,129	2SC2785(F)
Q5	2SC2271(D)
Q101,102,115	2SK117(Y)
Q107,108,111,112,121~123	2SA1175(F)
Q109,110	2SA838(C)
NL1,2	NE-2B
D1,2,8,9,101,103~113,115,121,124,125	DS442X
D4,5	W06C
D6,7	1SS83
D117	MTZ5.1JB

CS-1020 SCHEMATIC DIAGRAM

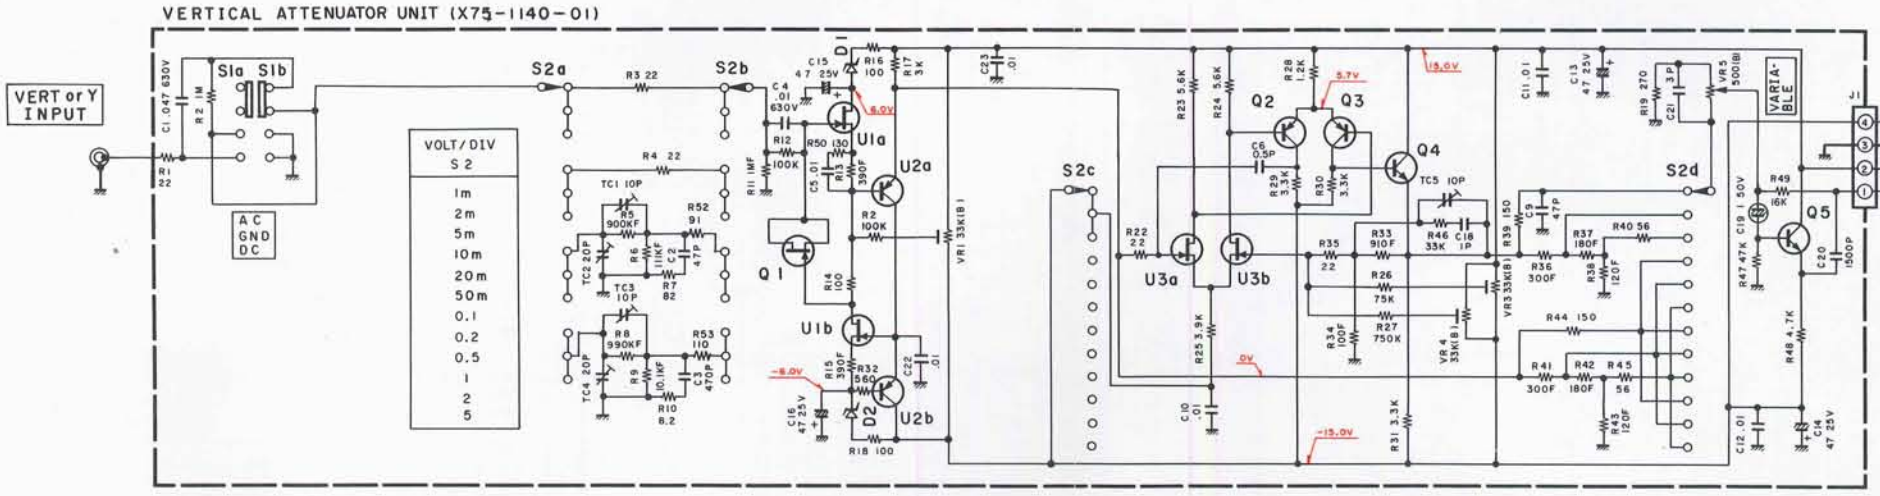


(X75-1140-01)
Q1 : 2SK30A(O)
Q2,3 : 2SA1005(K)
Q4,5 : 2SC2786(F)
U1 : M47F(C)
U2 : 2SA884
U3 : M47F(B)

D1,2 : MTZ9.1JC

(X73-1490-01)

Q2,3,8	: 2SA1005(K)	Q303,304	: 2SA1175(F)	U1	: M47F(B)
Q4~7,9~14	: 2SC2786(K)	Q305,306	: 2SC2271(E)	U301	: μPC7805H
Q15,16	: 2SC2407			U302	: μPC7915HA
Q17,18	: 2SC2912(R,S)	D1~3,305,306	: DS442X	U303	: NJM7815
Q301,302	: 2SA1009(L,K)	D301,302	: S2VB40F	U304	: NJM4558D
		D303,304	: SIVB60		
		D307	: V06B		

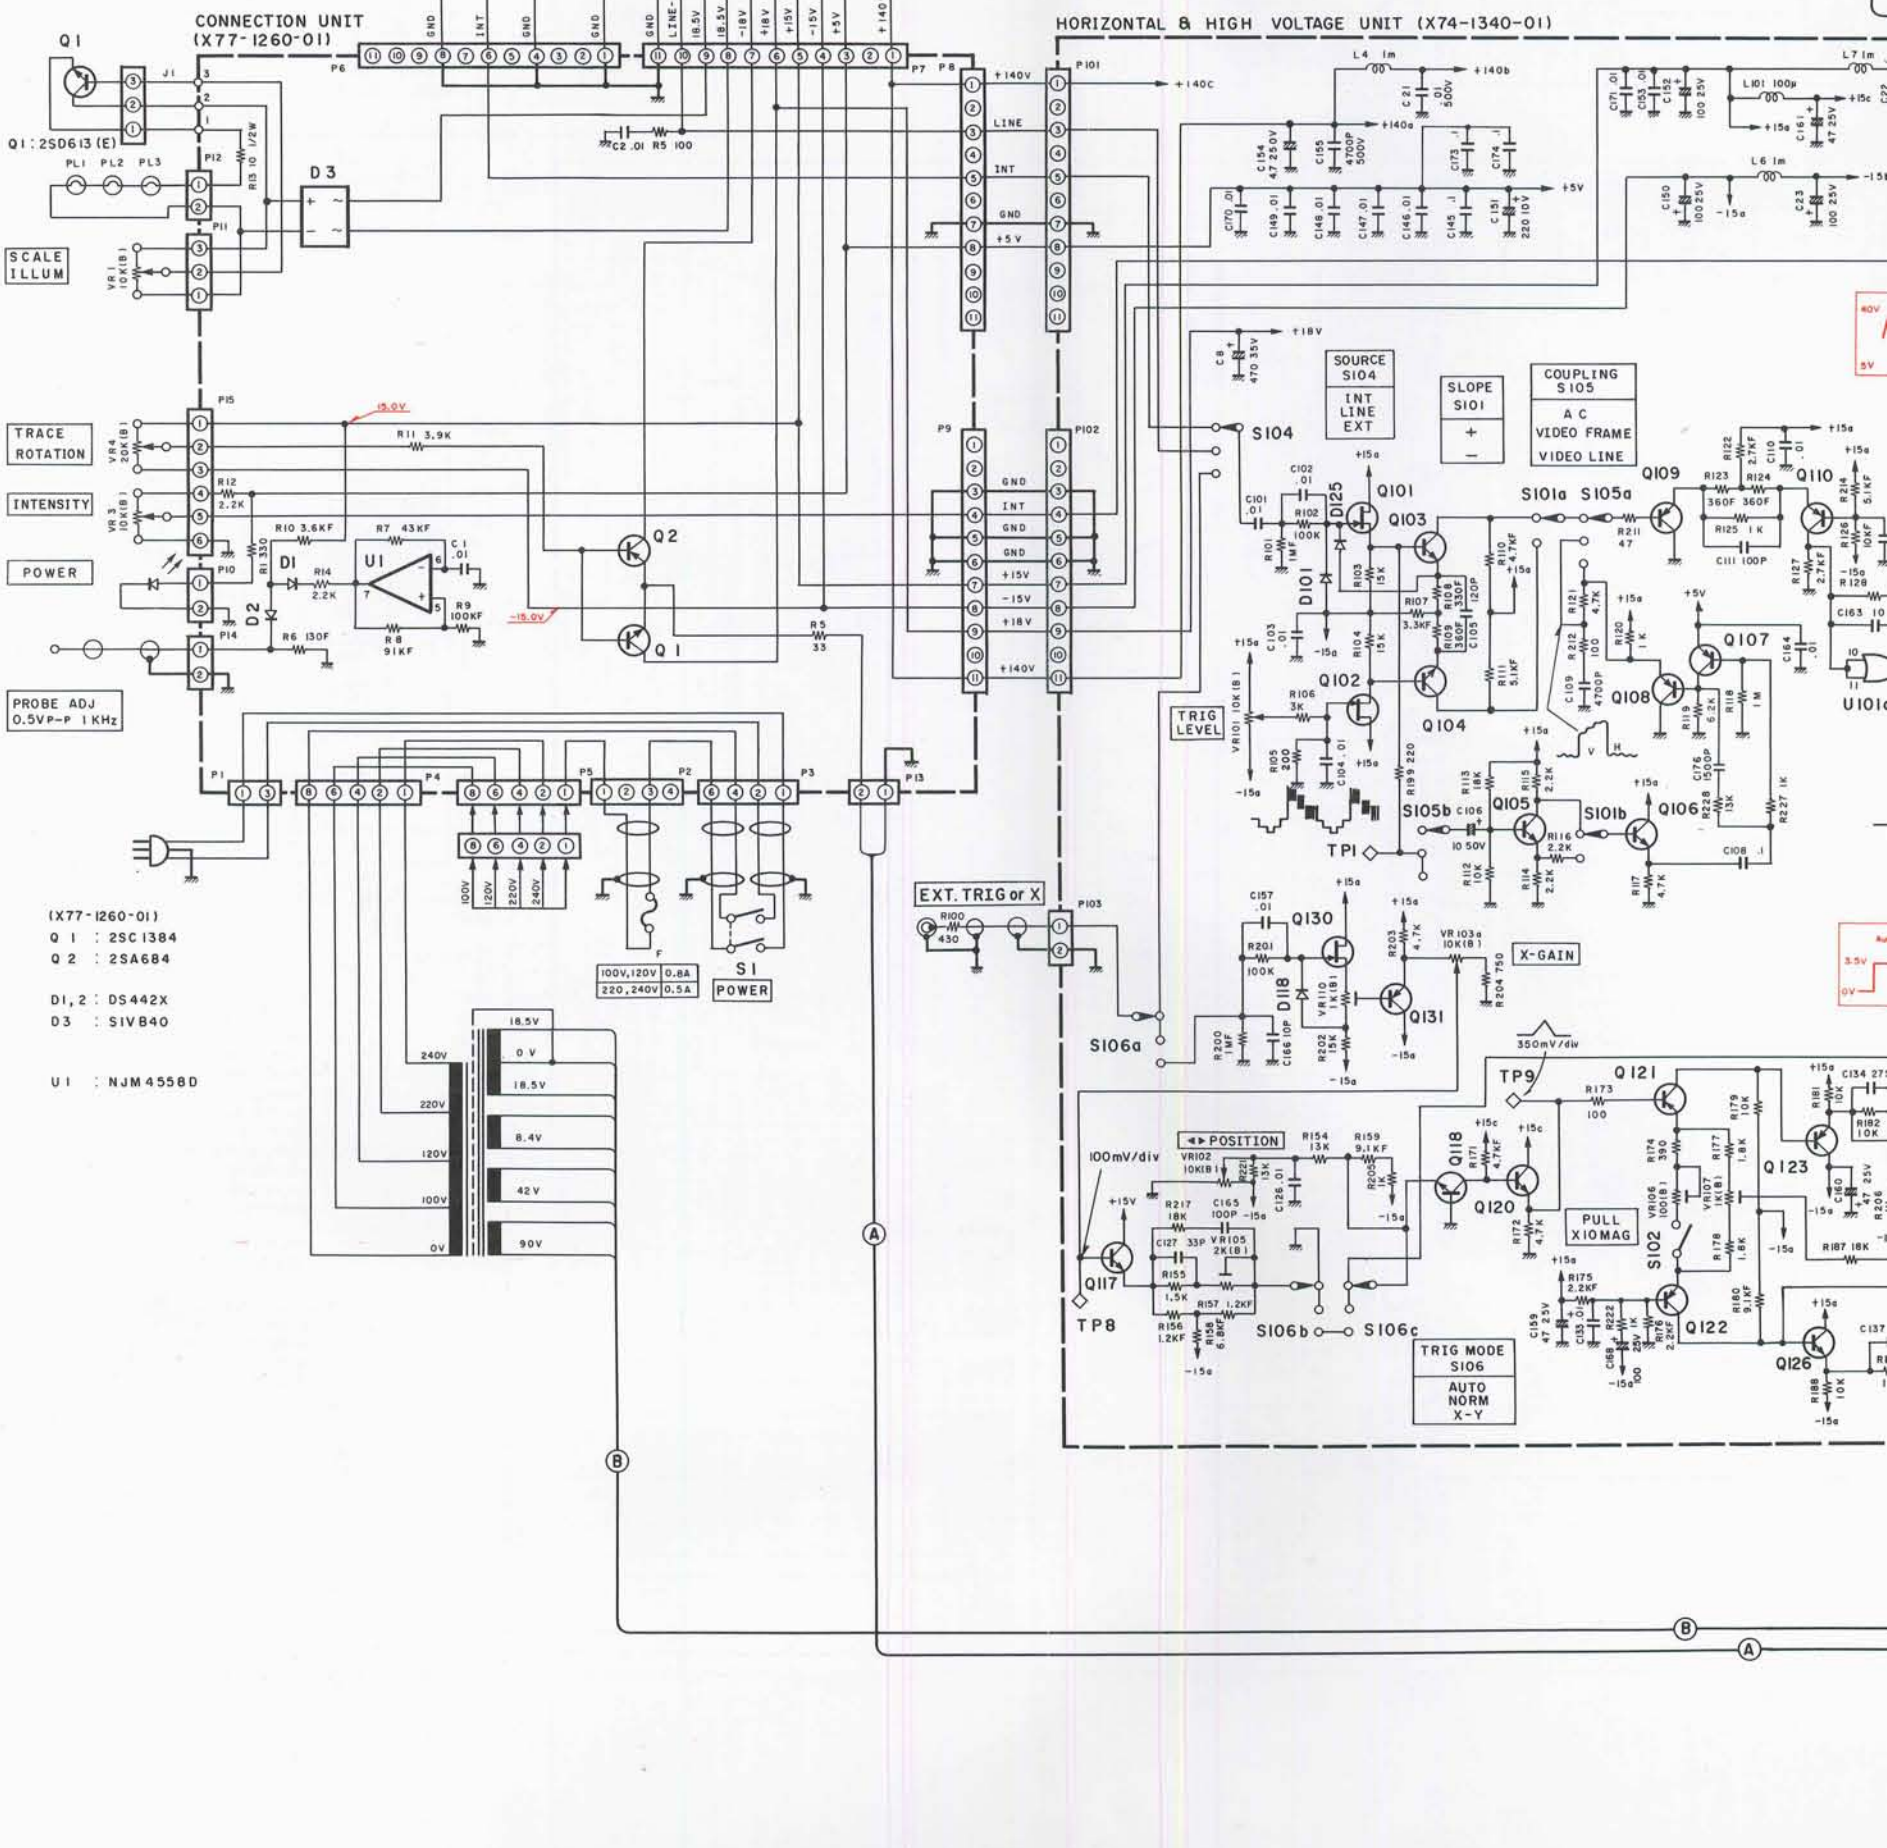


(X77-1260-01)
Q1 : 2SC1384
Q2 : 2SA684

D1,2 : DS442X
D3 : SIVB40

U1 : NJM4558D

VERTICAL AMP & POWER UNIT (X73-1490-01)

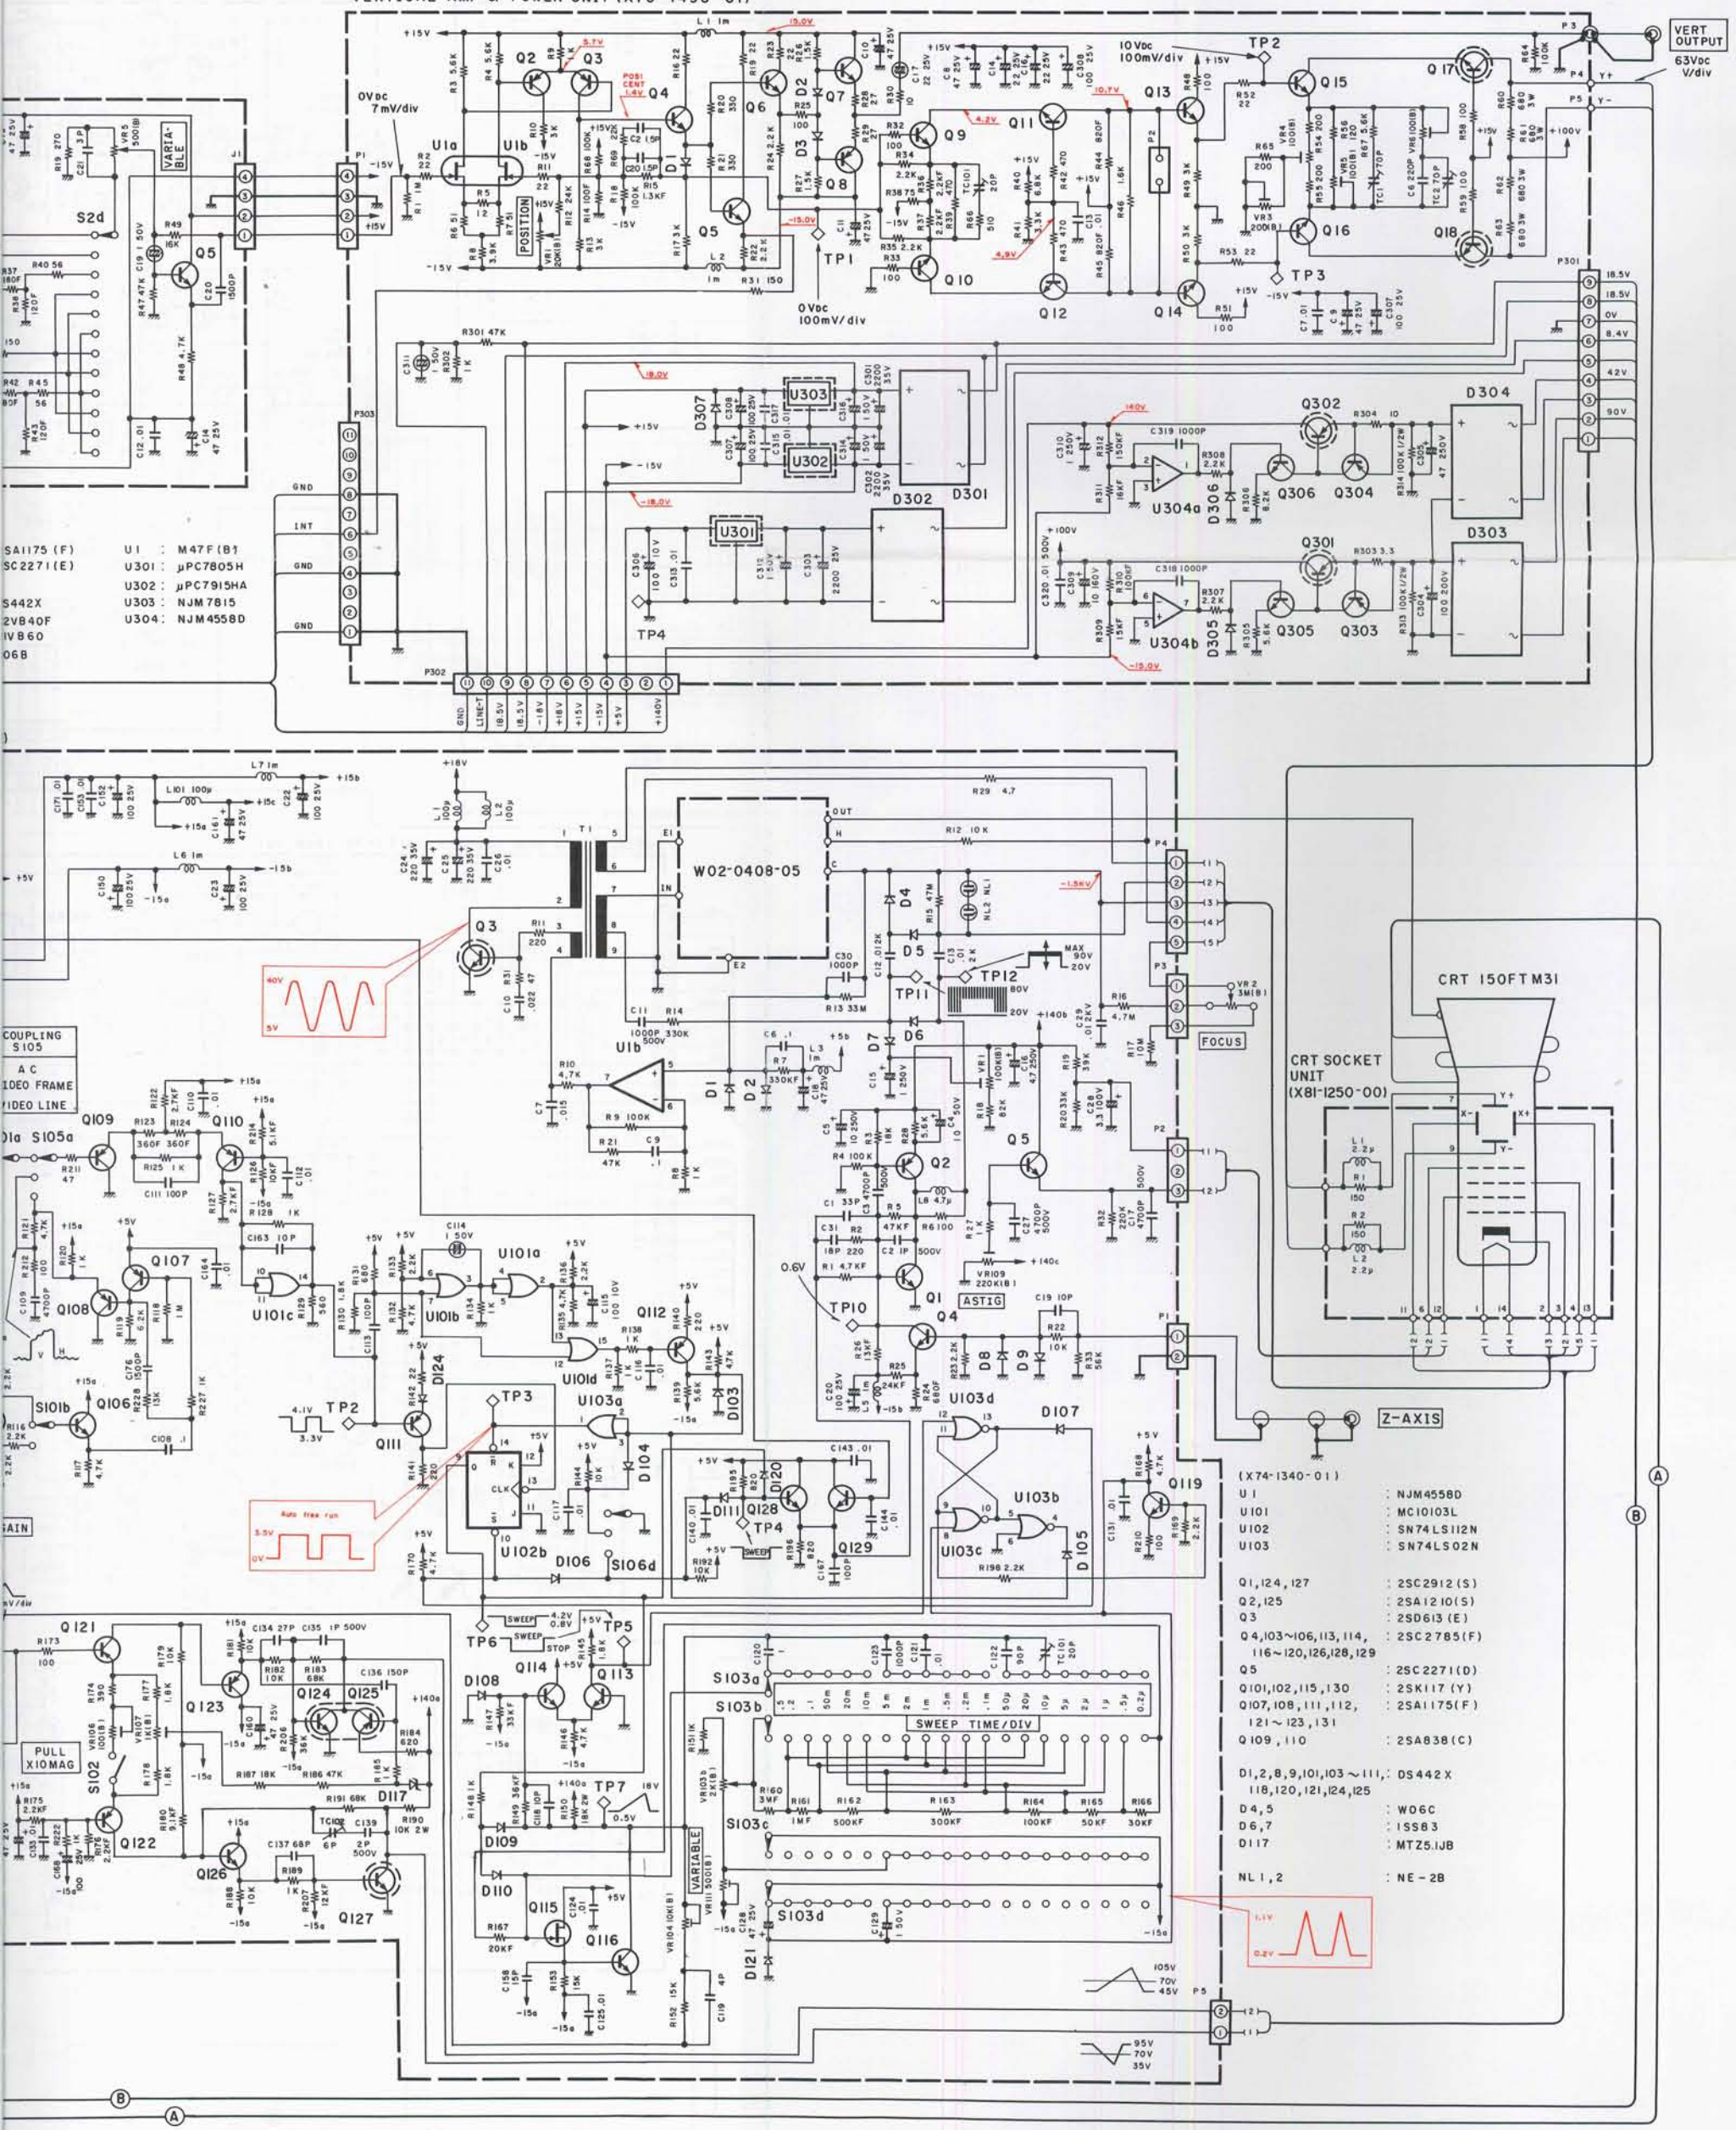


SA1175 (F)	U1	: M47F(B)
SC2271(E)	U301	: μPC7805H
S442X	U302	: μPC7915HA
2VB40F	U303	: NJM7815
IVB60	U304	: NJM4558D
068		

(X74-1340-01)

U1	: NJM4558D
U101	: MC10103L
U102	: SN74LS112N
U103	: SN74LS02N
Q1,124,127	: 2SC2912(S)
Q2,125	: 2SA1210(S)
Q3	: 2SD613(E)
Q4,103~106,113,114, 116~120,126,128,129	: 2SC2785(F)
Q5	: 2SC2271(D)
Q101,102,115,130	: 2SK117(Y)
Q107,108,111,112, 121~123,131	: 2SA1175(F)
Q109,110	: 2SA838(C)
D1,2,8,9,101,103~111, 118,120,121,124,125	: DS442X
D4,5	: W06C
D6,7	: 1SS83
D117	: MTZ5.1JB
NL1,2	: NE-28

CS-1012 SCHEMATIC DIAGRAM

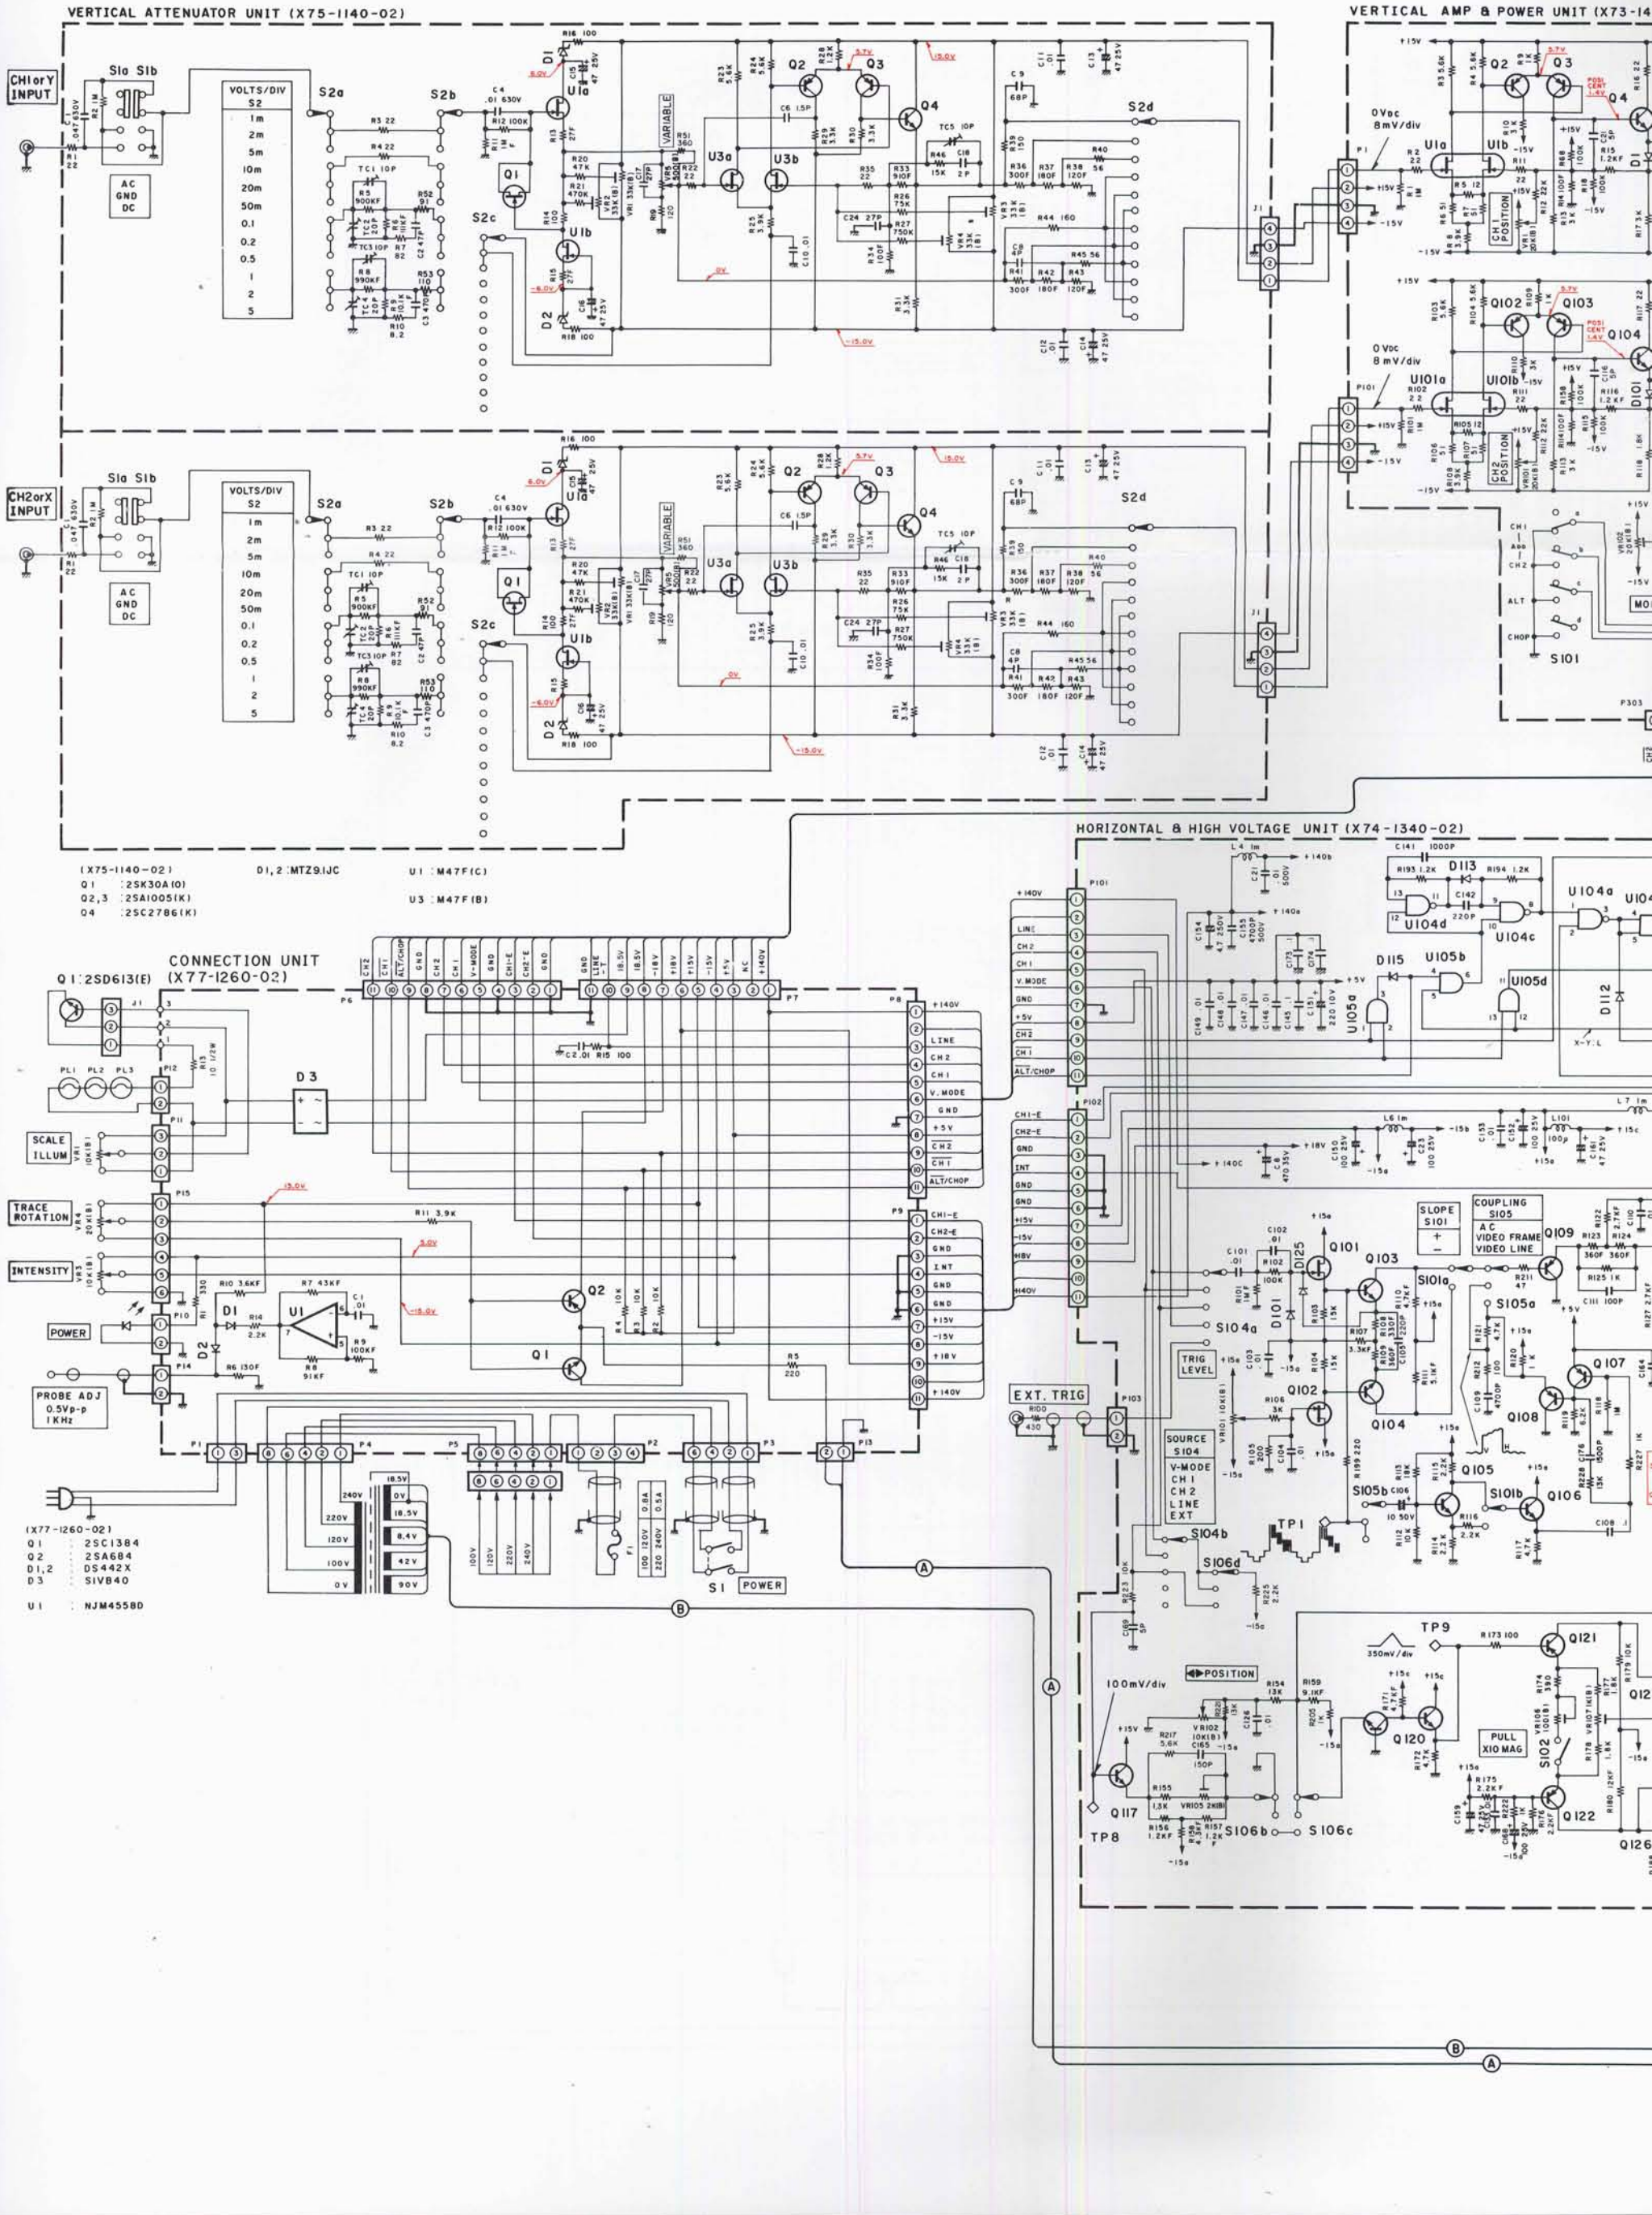

VERTICAL AMP & POWER UNIT (X73-1498-02)

CH1 OUTPUT

10Vdc 100mV/div

63Vdc 5V/div

0Vdc 8mV/div

0Vdc 100mV/div

Q2,3,8,102,103	: 2SA1005(K)	D1~3,101~107,305,306	: DS442X
Q5~7,9~14,105~112, 114,115	: 2SC2785(F)	D301,302	: S2VB40F
Q15,16	: 2SC1973	D303,304	: SIVB60
Q17,18	: 2SC2912(R,S)	D307	: V06B
Q4,104	: 2SC2786(K)	U1,101	: M47F(B)
Q113,303,304	: 2SA1175(F)	U301	: μPC7805H
Q301,302	: 2SA1009(L,K)	U302	: μPC7915HA
Q305,306	: 2SC2271(E)	U303	: NJM7815
		U304	: NJM4558D
		D108	: MTZ10JC


IT (X74-1340-02)

CRT 150GTM31

CRT SOCKET UNIT (X81-1250-01)

(X74-1340-02)	
U1	: NJM4558D
U101	: MC10103L
U102	: SN74LS112N
U103	: SN74LS02N
U104	: SN74LS00N
U105	: SN74LS08N
Q1,124,127	: 2SC2912(S)
Q2,125	: 2SA1210(S)
Q3	: 2SD613(E)
Q4,103~106,113,114,116~120,126,128,129	: 2SC2785(F)
Q5	: 2SC2271(D)
Q101,102,115	: 2SK117(Y)
Q107 112,121 123	: 2SA1175(F)
NL1,2	: NE-28
D1,2,8,9,101,103~113,115,121,124,125	: DS442X
D4,5	: W06C
D6,7,116,123	: 1SS83
D117	: MTZ5.1JB

CS-1010 SCHEMATIC DIAGRAM

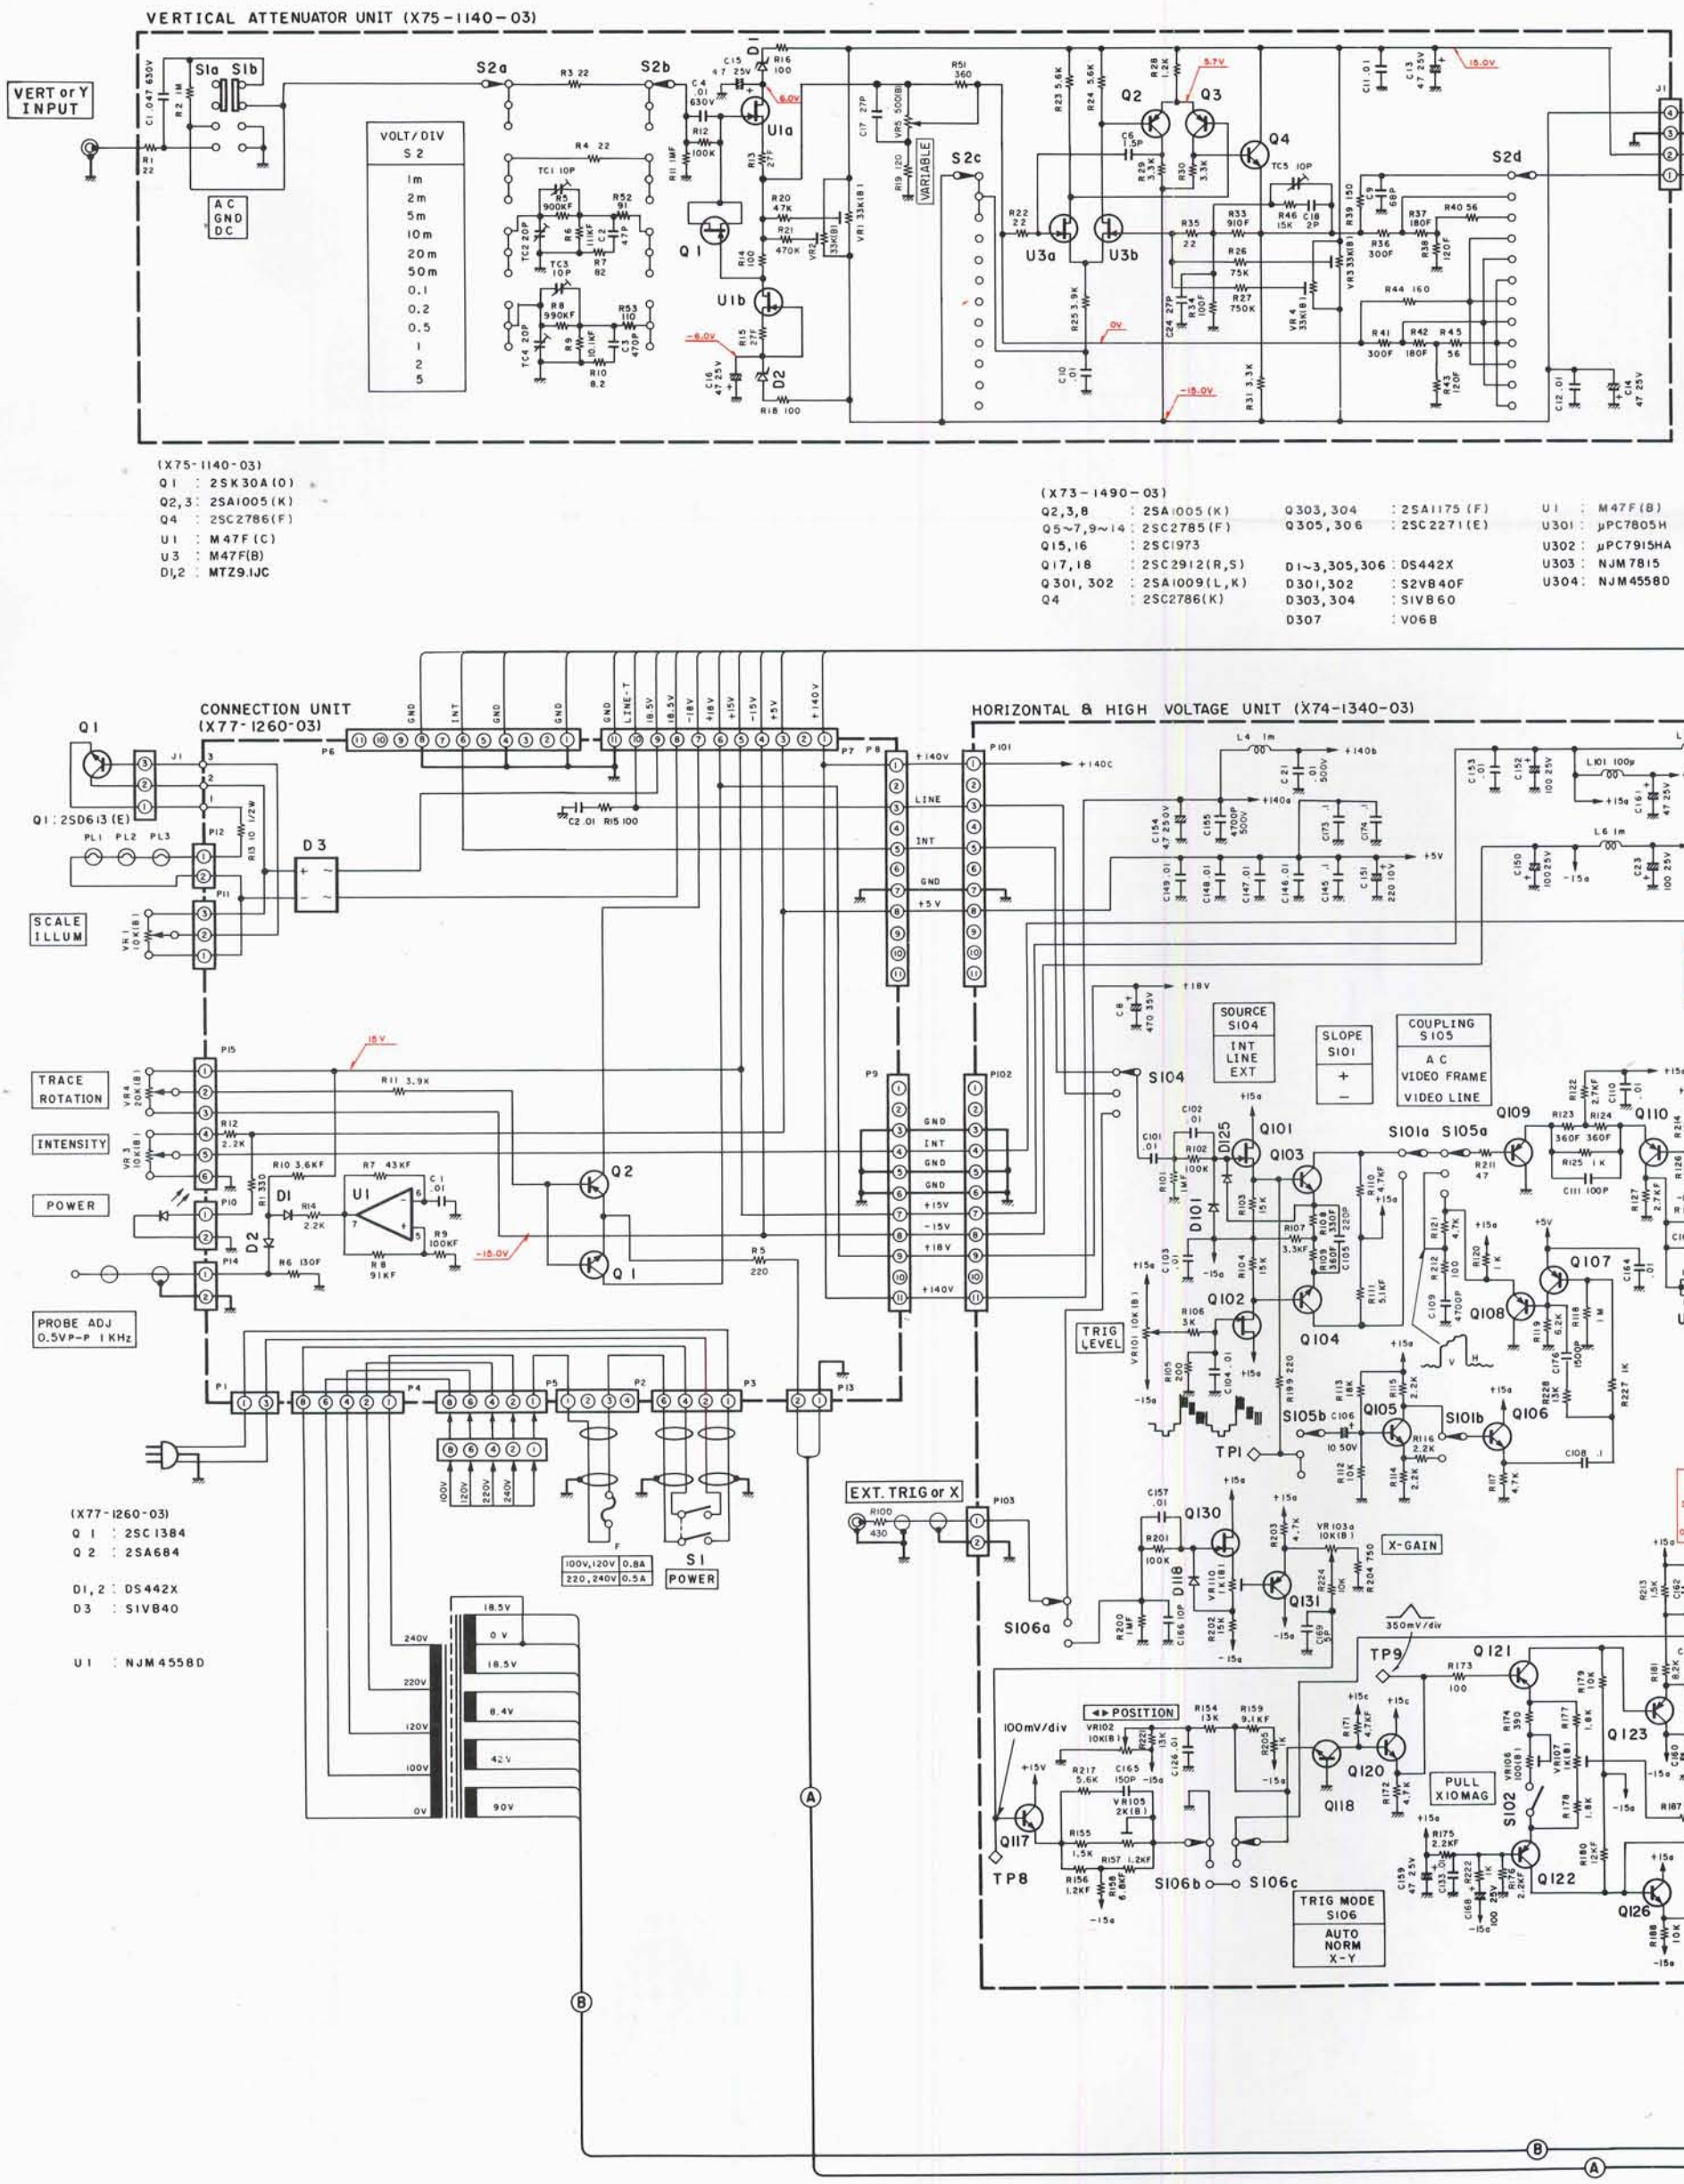

VERTICAL AMP & POWER UNIT (X73-1490-03)

2SA1175 (F)	U1	M47F(B)
2SC2271(E)	U301	μPC7805H
	U302	μPC7915HA
DS442X	U303	NJM7815
S2V840F	U304	NJM4558D
SiV860		
V068		

(X74-1340-03)


U1	NJM4558D
U101	MC10103L
U102	SN74LS112N
U103	SN74LS02N
Q1,124,127	2SC2912(S)
Q2,125	2SA1210(S)
Q3	2SD613(E)
Q4,103~106,113,114,116~120,126,128,129	2SC2785(F)
Q5	2SC2271(D)
Q101,102,115,130	2SK117(Y)
Q107~112,121~123,131	2SA1175(F)
D1,2,8,9,101,103~111,118,120,121,124,125	DS442X
D4,5	W06C
D6,7,116,123	1SS83
D117	MTZ9.1JB
NL1,2	NE-28

W02-0409-05

CRT 150GTM31

CRT SOCKET UNIT (X81-1250-01)

CS-1021 SCHEMATIC DIAGRAM

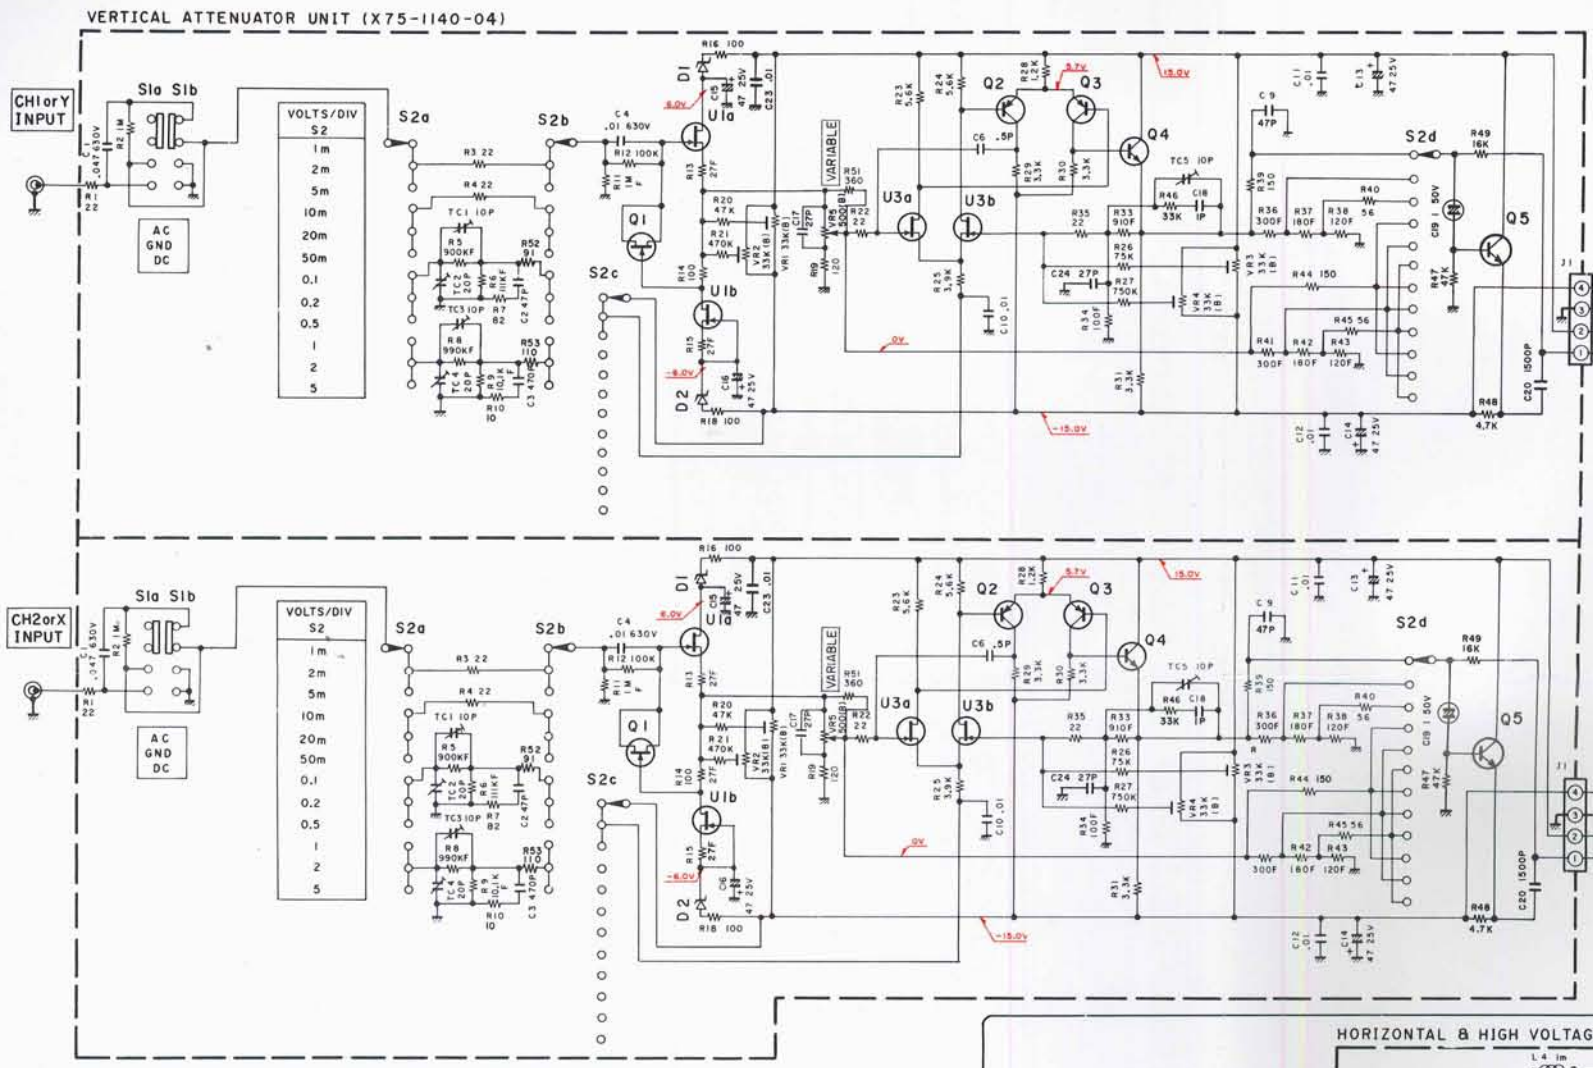

V.FINAL UNIT(X73-1630-00)

VERTICAL AMP & POWER UNIT (X73-1490-04)

Q1,2,4,6 : 2SC2912(R or S)
Q3,5 : 2SA1210(R or S)
D1~4 : DS442X

Q2,3,102,103	: 2SA1005(K)
Q4,5,9~14,104,105, 107~112,115	: 2SC2786(K)
Q15,16	: 2SC2407
Q106,114	: 2SC2785(F)
Q113,303,304	: 2SA1175(F)
Q301,302	: 2SA1009(L,K)
Q305,306	: 2SC2271(E)

D1,101~107,305,306	: DS442X
D301,302	: S2VB40F
D303,304	: S1VB60
D307	: V06B
D108	: MTZ10JC
U1,101	: M47F(B)
U301	: μPC7805H
U302	: μPC7915HA
U303	: NJM7815
U304	: NJM4558D

CRT 150GTM31A

CRT SOCKET UNIT (X81-1250-04)

(X74-1340-04)

U1	: NJM4558D
U101	: MC10103L
U102	: SN74LS112N
U103	: SN74LS02N
U104	: SN74LS00N
U105	: SN74LS08N
Q1,124,127	: 2SC2912(S)
Q2,125	: 2SA1210(S)
Q3	: 2SD613 (E)
Q4,103~106,113,114,116~120,126,128,129	: 2SC2785 (F)
Q5	: 2SC2271 (D)
Q101,102,115	: 2SK117(Y)
Q107,108,111,112,121~123	: 2SA1175(F)
Q109,110	: 2SA838(C)
NL1,2	: NE-28
D1,2,8,9,101,103~113,115,121,124,125	: DS442X
D4,5	: W06C
D6,7,116,123	: 1SS83
D117	: MTZ5.1JB

A product of
KENWOOD CORPORATION
17-5, 2-chome, Shibuya, Shibuya-ku, Tokyo 150, Japan

PRINTED IN JAPAN B51-1033-10 (T)

SCHEMATIC DIAGRAM
PARTS LIST
P.C. BOARD

KENWOOD

CS-1022
CS-1021
CS-1012
CS-1010

COMPOSIT

Serial No. 7020001 ~

PARTS LIST

VERTICAL ATTENUATOR UNIT

X75-1160-00 (CS-1022, 1021)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	A22-0828-13	SUB PANEL			
	E04-0259-05	BNC RECEPTACLE			
	E33-4038-00	WIRE ASSY			
	F10-1564-04	SHIELD PLATE			
	F10-1566-04	SHIELD PLATE			
	J25-2997-23	PCB (UNMOUNTED)			
	K21-0852-13	KNOB			
	K21-0855-14	KNOB			
	N30-3006-46	SCREW, PAN HD M 3X6			
	N89-3006-41	SCREW, BINDING TAP TITE			
	001-0801-05	COATING WIRE			
	212-2014-05	TUBE (PLASTIC)			
C001	C91-0501-05	CAP. METAL FILM	0.047	10%	630V
C002	CM93BD2A470J	CAP. MICA	47P	5%	100V
C003	CM93BD2A471J	CAP. MICA	470P	5%	100V
C004	C91-0502-05	CAP. METAL FILM	0.01	20%	630V
C005	CE04W1H100M	CAP. ELECTRO	10	20%	50V
C006	CC45CH1H1R5C	CAP. CERAMIC	1.5P	0.25P	50V
C009	CC45CH1H470J	CAP. CERAMIC	47P	5%	50V
C010	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C011	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C012	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C013	CE04FW1E470M	CAP. ELECTRO	47	20%	25V
C014	CE04FW1E470M	CAP. ELECTRO	47	20%	25V
C015	CE04FW1E470M	CAP. ELECTRO	47	20%	25V
C016	CE04FW1E470M	CAP. ELECTRO	47	20%	25V
C017	CC45CH1H030C	CAP. CERAMIC	3P	0.25P	50V
C018	CC45CH1H020C	CAP. CERAMIC	2P	0.25P	50V
C019	CE04BW1H010M	CAP. ELECTRO	1	20%	50V
C020	CK45B1H222K	CAP. CERAMIC	2200P	10%	50V
C023	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C024	NO USE				
C025	CC45CH1H1R5C	CAP. CERAMIC	1.5P	0.25P	50V
C026	CC45CH2H090D	CAP. CERAMIC	9P	0.5P	500V
C027	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
D001	MTZ9.1JC	DIODE ZENER	9V		
D002	MTZ9.1JC	DIODE ZENER	9V		
J001	E31-2367-15	LEAD WIRE WITH CONNECTOR			
Q001	2SK30A(O)	FET,N-CHANNEL			
Q002	2SA1005(K)	TR. SI, PNP			
Q003	2SA1005(K)	TR. SI, PNP			
Q004	2SC3354(T,S)	TR. SI, NPN			
Q005	2SC2786(K)	TR. SI, NPN			
R001	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R002	RD14BB2E105J	RES. CARBON	1M	5%	1/4W
R003	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R004	RD14BB2E220J	RES. CARBON	22	5%	1/4W

REF.NO	PARTS NO	NAME & DESCRIPTION			
R005	RN14BK2E9003F	RES. METAL FILM	900K	1%	1/4W
R006	RN14BK2E1113F	RES. METAL FILM	111K	1%	1/4W
R007	RD14BB2E820J	RES. CARBON	82	5%	1/4W
R008	RN14BK2E9903F	RES. METAL FILM	990K	1%	1/4W
R009	RN14BK2E1012F	RES. METAL FILM	10.1K	1%	1/4W
R010	RD14BB2E100J	RES. CARBON	10	5%	1/4W
R011	RN14BK2E1004F	RES. METAL FILM	1M	1%	1/4W
R012	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R013	RN14BK2E1101F	RES. METAL FILM	1.1K	1%	1/4W
R014	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R015	RN14BK2E1101F	RES. METAL FILM	1.1K	1%	1/4W
R016	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R017	RD14BB2C302J	RES. CARBON	3K	5%	1/6W
R018	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R019	RD14BB2E271J	RES. CARBON	270	5%	1/4W
R020	RD14BB2C564J	RES. CARBON	560K	5%	1/6W
R021	RD14BB2E125J	RES. CARBON	1.2M	5%	1/4W
R022	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R023	RN14BK2E5601F	RES. METAL FILM	5.6K	1%	1/4W
R024	RN14BK2E5601F	RES. METAL FILM	5.6K	1%	1/4W
R025	RD14BB2E392J	RES. CARBON	3.9K	5%	1/4W
R026	RD14BB2E753J	RES. CARBON	75K	5%	1/4W
R027	RD14BB2E754J	RES. CARBON	750K	5%	1/4W
R028	RD14BB2E112J	RES. CARBON	1.1K	5%	1/4W
R029	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W
R030	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R031	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R032	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W
R033	RN14BK2E9100F	RES. METAL FILM	910	1%	1/4W
R034	RN14BK2E1000F	RES. METAL FILM	100	1%	1/4W
R035	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R036	RN14BK2E3000F	RES. METAL FILM	300	1%	1/4W
R037	RN14BK2E1800F	RES. METAL FILM	180	1%	1/4W
R038	RN14BK2E1200F	RES. METAL FILM	120	1%	1/4W
R039	RD14BB2E151J	RES. CARBON	150	5%	1/4W
R040	RD14BB2E560J	RES. CARBON	56	5%	1/4W
R041	RN14BK2E3000F	RES. METAL FILM	300	1%	1/4W
R042	RN14BK2E1800F	RES. METAL FILM	180	1%	1/4W
R043	RN14BK2E1200F	RES. METAL FILM	120	1%	1/4W
R044	RD14BB2E151J	RES. CARBON	150	5%	1/4W
R045	RD14BB2E560J	RES. CARBON	56	5%	1/4W
R046	RD14BB2E303J	RES. CARBON	30K	5%	1/4W
R047	RD14BB2E473J	RES. CARBON	47K	5%	1/4W
R048	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R049	RD14BB2C223J	RES. CARBON	22K	5%	1/6W
R050	E31-2170-05	JUMPING WIRE			
R051	NO USE				
R052	RD14BB2C910J	RES. CARBON	91	5%	1/6W
R053	RD14BB2C111J	RES. CARBON	110	5%	1/6W
R054	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R055	RD14BB2C302J	RES. CARBON	3K	5%	1/6W
R056	RD14BB2C333J	RES. CARBON	33K	5%	1/6W
S001	S32-4007-05	LEVER SWITCH			
S002	S02-3501-25	ROTARY SWITCH			

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION
TC001	C05-0427-05	CAP. TRIMMER 10P
TC002	C05-0428-05	CAP. TRIMMER 20P
TC003	C05-0427-05	CAP. TRIMMER 10P
TC004	C05-0428-05	CAP. TRIMMER 20P
TC005	C05-0427-05	CAP. TRIMMER 10P
U001	UPA71A(L)	FET, N-CHANNEL
U002	2SA1349(GR,BL)	TR. SI, PNP
U003	2SK389(GR)	FET, N-CHANNEL
VR001	R12-3537-05	RES. SEMI FIXED 20K B
VR002	R12-3537-05	RES. SEMI FIXED 20K B
VR003	R12-3537-05	RES. SEMI FIXED 20K B
VR004	R12-3537-05	RES. SEMI FIXED 20K B
VR005	S02-3501-25	ROTARY SWITCH

VERTICAL ATTENUATOR UNIT

X75-1160-02, 03 (CS-1012, 1010)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	A22-0828-13	SUB PANEL			
	E04-0259-05	BNC RECEPTACLE			
	E33-4038-00	WIRE ASSY			
	F10-1564-04	SHIELD PLATE			
	F10-1566-04	SHIELD PLATE			
	J25-2997-23	PCB (UNMOUNTED)			
	K21-0852-13	KNOB			
	K21-0855-14	KNOB			
	N30-3006-46	SCREW, PAN HD M 3X6			
	N89-3006-41	SCREW, BINDING TAP TITE			
	001-0801-05	COATING WIRE			
	212-2014-05	TUBE (PLASTIC)			
C001	C91-0501-05	CAP. METAL FILM	0.047	10%	630V
C002	CM93BD2A470J	CAP. MICA	47P	5%	100V
C003	CM93BD2A471J	CAP. MICA	470P	5%	100V
C004	C91-0502-05	CAP. METAL FILM	0.01	20%	630V
C005	CE04W1H100M	CAP. ELECTRO	10	20%	50V
C006	CC45CH1H1R5C	CAP. CERAMIC	1.5P	0.25P	50V
C009	CC45CH1H470J	CAP. CERAMIC	47P	5%	50V
C010	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C011	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C012	CK45F1H103Z	CAP. CERAMIC	0.01		50V
C013	CE04FW1E470M	CAP. ELECTRO	47	20%	25V
C014	CE04FW1E470M	CAP. ELECTRO	47	20%	25V
C015	CE04FW1E470M	CAP. ELECTRO	47	20%	25V
C016	CE04FW1E470M	CAP. ELECTRO	47	20%	25V
C017	CC45CH1H030C	CAP. CERAMIC	3P	0.25P	50V
C018	CC45CH1H020C	CAP. CERAMIC	2P	0.25P	50V
C019	CE04BW1H010M	CAP. ELECTRO	1	20%	50V
C020	CK45B1H222K	CAP. CERAMIC	2200P	10%	50V
C023	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C024	NO USE				
C025	CC45CH1H1R5C	CAP. CERAMIC	1.5P	0.25P	50V
C026	CC45CH2H090D	CAP. CERAMIC	9P	0.5P	500V
C027	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
D001	MTZ9.1JC	DIODE ZENER	9V		
D002	MTZ9.1JC	DIODE ZENER	9V		
J001	E31-2367-15	LEAD WIRE WITH CONNECTOR			
Q001	2SK30A(O)	FET,N-CHANNEL			
Q002	2SA1005(K)	TR. SI, PNP			
Q003	2SA1005(K)	TR. SI, PNP			
Q004	2SC2786(K)	TR. SI, NPN			
Q005	2SC2786(K)	TR. SI, NPN			
R001	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R002	RD14BB2E105J	RES. CARBON	1M	5%	1/4W
R003	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R004	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R005	RN14BK2E9003F	RES. METAL FILM	900K	1%	1/4W
R006	RN14BK2E1113F	RES. METAL FILM	111K	1%	1/4W
R007	RD14BB2E820J	RES. CARBON	82	5%	1/4W
R008	RN14BK2E9903F	RES. METAL FILM	990K	1%	1/4W
R009	RN14BK2E1012F	RES. METAL FILM	10.1K	1%	1/4W
R010	RD14BB2E100J	RES. CARBON	10	5%	1/4W
R011	RN14BK2E1004F	RES. METAL FILM	1M	1%	1/4W
R012	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R013	RN14BK2E1101F	RES. METAL FILM	1.1K	1%	1/4W
R014	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R015	RN14BK2E1101F	RES. METAL FILM	1.1K	1%	1/4W
R016	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R017	RD14BB2C302J	RES. CARBON	3K	5%	1/6W
R018	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R019	RD14BB2E271J	RES. CARBON	270	5%	1/4W
R020	RD14BB2C564J	RES. CARBON	560K	5%	1/6W
R021	RD14BB2E125J	RES. CARBON	1.2M	5%	1/4W
R022	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R023	RN14BK2E5601F	RES. METAL FILM	5.6K	1%	1/4W
R024	RN14BK2E5601F	RES. METAL FILM	5.6K	1%	1/4W
R025	RD14BB2E392J	RES. CARBON	3.9K	5%	1/4W
R026	RD14BB2E753J	RES. CARBON	75K	5%	1/4W
R027	RD14BB2E754J	RES. CARBON	750K	5%	1/4W
R028	RD14BB2E112J	RES. CARBON	1.1K	5%	1/4W
R029	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W
R030	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R031	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R032	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W
R033	RN14BK2E9100F	RES. METAL FILM	910	1%	1/4W
R034	RN14BK2E1000F	RES. METAL FILM	100	1%	1/4W
R035	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R036	RN14BK2E3000F	RES. METAL FILM	300	1%	1/4W
R037	RN14BK2E1800F	RES. METAL FILM	180	1%	1/4W
R038	RN14BK2E1200F	RES. METAL FILM	120	1%	1/4W
R039	RD14BB2E151J	RES. CARBON	150	5%	1/4W
R040	RD14BB2E560J	RES. CARBON	56	5%	1/4W
R041	RN14BK2E3000F	RES. METAL FILM	300	1%	1/4W
R042	RN14BK2E1800F	RES. METAL FILM	180	1%	1/4W
R043	RN14BK2E1200F	RES. METAL FILM	120	1%	1/4W
R044	RD14BB2E151J	RES. CARBON	150	5%	1/4W
R045	RD14BB2E560J	RES. CARBON	56	5%	1/4W
R046	RD14BB2E303J	RES. CARBON	30K	5%	1/4W
R047	RD14BB2E473J	RES. CARBON	47K	5%	1/4W
R048	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R049	RD14BB2C223J	RES. CARBON	22K	5%	1/6W
R050	E31-2170-05	JUMPING WIRE			
R051	NO USE				
R052	RD14BB2C910J	RES. CARBON	91	5%	1/6W
R053	RD14BB2C111J	RES. CARBON	110	5%	1/6W
R054	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R055	RD14BB2C302J	RES. CARBON	3K	5%	1/6W
R056	RD14BB2C333J	RES. CARBON	33K	5%	1/6W
S001	S32-4007-05	LEVER SWITCH			
S002	S02-3501-25	ROTARY SWITCH			
TC001	C05-0427-05	CAP. TRIMMER 10P			
TC002	C05-0428-05	CAP. TRIMMER 20P			
TC003	C05-0427-05	CAP. TRIMMER 10P			
TC004	C05-0428-05	CAP. TRIMMER 20P			
TC005	C05-0427-05	CAP. TRIMMER 10P			
U001	UPA71A(L)	FET, N-CHANNEL			
U002	2SA1349(GR,BL)	TR. SI, PNP			
U003	2SK389(GR)	FET, N-CHANNEL			
VR001	R12-3537-05	RES. SEMI FIXED 20K B			
VR002	R12-3537-05	RES. SEMI FIXED 20K B			
VR003	R12-3537-05	RES. SEMI FIXED 20K B			
VR004	R12-3537-05	RES. SEMI FIXED 20K B			
VR005	S02-3501-25	ROTARY SWITCH			

PARTS LIST

VERTICAL AMP & POWER UNIT

X73-1720-00 (CS-1022)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	E23-0526-04	EARTH PLATE			
	E31-2303-05	LEAD WIRE WITH CONNECTOR			
	E31-2706-05	LEAD WIRE WITH CONNECTOR			
	E33-4031-00	WIRE ASSY			
	F01-0835-05	HEAT SINK			
	F01-0836-04	HEAT SINK			
	J25-2999-23	PCB (UNMOUNTED)			
	J61-0517-05	STADOFF CLIP			
	N19-0191-05	WASHER NONMETAL			
	N19-0702-04	WASHER			
	N30-3008-46	SCREW, PAN HD	M 3X8		
	R92-0150-05	JUMPING RES.	ZERO OHM		
C006	CC45CH1H221J	CAP. CERAMIC	220P	5%	50V
C007	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C008	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C009	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C010	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C011	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C012	NO USE				
C013	CC45CH1H470J	CAP. CERAMIC	47P	5%	50V
C014	CE04W1E220M	CAP. ELECTRO	22	20%	25V
C015	NO USE				
C016	CE04W1E220M	CAP. ELECTRO	22	20%	25V
C017	CE04BW1E220M	CAP. ELECTRO	22	20%	25V
C021	CC45CH1H020C	CAP. CERAMIC	2P	0.25P	50V
C022	CC45CH1H1R5C	CAP. CERAMIC	1.5P	0.25P	50V
C023	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C104	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C105	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C106	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C109	CC45CH1H470J	CAP. CERAMIC	47P	5%	50V
C110	CC45CH1H470J	CAP. CERAMIC	47P	5%	50V
C111	CE04BW1H010M	CAP. ELECTRO	1	20%	50V
C112	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C116	CC45CH1H1R5C	CAP. CERAMIC	1.5P	0.25P	50V
C117	CC45CH1H1R5C	CAP. CERAMIC	1.5P	0.25P	50V
C118	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C119	NO USE				
C120	CC45CH1H121J	CAP. CERAMIC	120P	5%	50V
C301	CE04W1V222M	CAP. ELECTRO	2200	20%	35V
C302	CE04W1V222M	CAP. ELECTRO	2200	20%	35V
C303	CE04W1E222M	CAP. ELECTRO	2200	20%	25V
C304	C90-0910-05	CAP. ELECTRO	100	20%	200V
C305	CE04W2E470	CAP. ELECTRO	47		250V
C306	CE04W1A101M	CAP. ELECTRO	100	20%	10V
C307	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C308	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C309	CE04W2C100	CAP. ELECTRO	10		160V
C310	CE04W2E010	CAP. ELECTRO	1		250V
C311	CE04BW1H010M	CAP. ELECTRO	1	20%	50V
C312	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C313	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C314	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C315	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C316	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C317	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V
C318	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C319	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C320	CK45B2H103K	CAP. CERAMIC	0.01	10%	500V
C321	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C324	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
D001	DS442X	DIODE			
D002	DS442X	DIODE			
D003	DS442X	DIODE			
D101	DS442X	DIODE			
D102	DS442X	DIODE			
D103	DS442X	DIODE			
D104	DS442X	DIODE			
D105	DS442X	DIODE			
D106	DS442X	DIODE			
D107	DS442X	DIODE			
D108	MTZ10JC	DIODE, ZENER	10V		

REF.NO	PARTS NO	NAME & DESCRIPTION			
D301	S2VB40F1	DIODE			
D302	S2VB40F1	DIODE			
D303	S1VB60	DIODE			
D304	S1VB60	DIODE			
D305	DS442X	DIODE			
D306	DS442X	DIODE			
D307	V06B	DIODE			
L001	L40-1025-03	FERRI INDUCTOR			
L002	L40-1025-03	FERRI INDUCTOR			
P001	E40-0473-05	PIN CONNECTOR	4 P		
P002	E40-0273-05	PIN CONNECTOR	2 P		
P003	E04-0154-05	BNC RECEPTACLE			
P004	E23-0046-04	TERMINAL			
P005	E23-0046-04	TERMINAL			
P101	E40-0473-05	PIN CONNECTOR	4 P		
P301	E40-0930-05	PIN CONNECTOR	9 P		
P302	E40-1116-05	PIN CONNECTOR	11 P		
P303	E40-1116-05	PIN CONNECTOR	11 P		
Q002	2SA1005(K)	TR. SI, PNP			
Q003	2SA1005(K)	TR. SI, PNP			
Q004	2SC3354(T,S)	TR. SI, NPN			
Q005	2SC2786(K)	TR. SI, NPN			
Q006	2SC2786(K)	TR. SI, NPN			
Q007	2SC2786(K)	TR. SI, NPN			
Q008	2SA1005(K)	TR. SI, PNP			
Q009	2SC2786(K)	TR. SI, NPN			
Q010	2SC2786(K)	TR. SI, NPN			
Q011	2SC2786(K)	TR. SI, NPN			
Q012	2SC2786(K)	TR. SI, NPN			
Q013	2SC2786(K)	TR. SI, NPN			
Q014	2SC2786(K)	TR. SI, NPN			
Q015	2SC2407	TR. SI, NPN			
Q016	2SC2407	TR. SI, NPN			
Q017	2SC2912(R,S)	TR. SI, NPN			
Q018	2SC2912(R,S)	TR. SI, NPN			
Q102	2SA1005(K)	TR. SI, PNP			
Q103	2SA1005(K)	TR. SI, PNP			
Q104	2SC3354(T,S)	TR. SI, NPN			
Q105	2SC2786(K)	TR. SI, NPN			
Q106	2SC2785(F)	TR. SI, NPN			
Q107	2SC2786(K)	TR. SI, NPN			
Q108	2SC2786(K)	TR. SI, NPN			
Q109	2SC2786(K)	TR. SI, NPN			
Q110	2SC2786(K)	TR. SI, NPN			
Q111	2SC2786(K)	TR. SI, NPN			
Q112	2SC2786(K)	TR. SI, NPN			
Q113	2SA1175(F)	TR. SI, PNP			
Q114	2SC2785(F)	TR. SI, NPN			
Q115	2SC2786(K)	TR. SI, NPN			
Q301	2SA1009A(J,K)	TR. SI, PNP			
Q302	2SA1009A(J,K)	TR. SI, PNP			
Q303	2SA1175(F)	TR. SI, PNP			
Q304	2SA1175(F)	TR. SI, PNP			
Q305	2SC2271(E)	TR. SI, NPN			
Q306	2SC2271(E)	TR. SI, NPN			
R001	RD14BB2E105J	RES. CARBON	1M	5%	1/4W
R002	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R003	RN14BK2E5601F	RES. METAL FILM	5.6K	1%	1/4W
R004	RN14BK2E5601F	RES. METAL FILM	5.6K	1%	1/4W
R005	RD14BB2C120J	RES. CARBON	12	5%	1/6W
R006	RD14BB2C510J	RES. CARBON	51	5%	1/6W
R007	RD14BB2C510J	RES. CARBON	51	5%	1/6W
R008	RD14BB2E392J	RES. CARBON	3.9K	5%	1/4W
R009	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R010	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R011	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R012	RD14BB2C243J	RES. CARBON	24K	5%	1/6W
R013	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R014	RN14BK2C1000F	RES. METAL FILM	100	1%	1/6W
R015	RN14BK2C1301F	RES. METAL FILM	1.3K	1%	1/6W
R016	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R017	RD14BB2C302J	RES. CARBON	3K	5%	1/6W
R018	RD14BB2C753J	RES. CARBON	75K	5%	1/6W
R019	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R020	RD14BB2E331J	RES. CARBON	330	5%	1/4W
R021	RD14BB2E331J	RES. CARBON	330	5%	1/4W
R022	NO USE				
R023	RD14BB2E220J	RES. CARBON	22	5%	1/4W

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION			
R024	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R025	RD14BB2E510J	RES. CARBON	51	5%	1/4W
R026	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R027	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R028	RD14BB2E270J	RES. CARBON	27	5%	1/4W
R029	RD14BB2E270J	RES. CARBON	27	5%	1/4W
R030	RD14BB2E300J	RES. CARBON	30	5%	1/4W
R031	RD14BB2E151J	RES. CARBON	150	5%	1/4W
R032	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R033	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R034	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R035	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R036	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R037	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R038	RD14BB2E750J	RES. CARBON	75	5%	1/4W
R039	RD14BB2E431J	RES. CARBON	430	5%	1/4W
R040	RD14BB2E682J	RES. CARBON	6.8K	5%	1/4W
R041	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R042	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R043	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R044	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R045	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R046	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R047	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R048	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R049	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R050	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R051	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R052	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R053	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R054	RD14BB2E201J	RES. CARBON	200	5%	1/4W
R055	RD14BB2E201J	RES. CARBON	200	5%	1/4W
R056	RD14BB2E121J	RES. CARBON	120	5%	1/4W
R057	NO USE				
R058	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R059	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R060	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R061	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R062	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R063	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R064	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R065	RD14BB2E201J	RES. CARBON	200	5%	1/4W
R066	RD14BB2E561J	RES. CARBON	560	5%	1/4W
R067	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R070	RD14BB2C153J	RES. CARBON	15K	5%	1/6W
R071	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R101	RD14BB2E105J	RES. CARBON	1M	5%	1/4W
R102	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R103	RN14BK2E5601F	RES. METAL FILM	5.6K	1%	1/4W
R104	RN14BK2E5601F	RES. METAL FILM	5.6K	1%	1/4W
R105	RD14BB2C120J	RES. CARBON	12	5%	1/6W
R106	RD14BB2C510J	RES. CARBON	51	5%	1/6W
R107	RD14BB2C510J	RES. CARBON	51	5%	1/6W
R108	RD14BB2C392J	RES. CARBON	3.9K	5%	1/6W
R109	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R110	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R111	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R112	RD14BB2C243J	RES. CARBON	24K	5%	1/6W
R113	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R114	RN14BK2C1000F	RES. METAL FILM	100	1%	1/6W
R115	RD14BB2C753J	RES. CARBON	75K	5%	1/6W
R116	RN14BK2C1301F	RES. METAL FILM	1.3K	1%	1/6W
R117	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R118	RD14BB2E182J	RES. CARBON	1.8K	5%	1/4W
R119	NO USE				
R120	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R121	RD14BB2E561J	RES. CARBON	560	5%	1/4W
R122	NO USE				
R123	RD14BB2E333J	RES. CARBON	33K	5%	1/4W
R124	RD14BB2E151J	RES. CARBON	150	5%	1/4W
R125	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R126	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R127	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W
R128	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R129	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R130	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R131	RD14BB2E750J	RES. CARBON	75	5%	1/4W
R132	RN14BK2E2001F	RES. METAL FILM	2K	1%	1/4W
R133	RN14BK2E2001F	RES. METAL FILM	2K	1%	1/4W
R134	RD14BB2E510J	RES. CARBON	51	5%	1/4W
R135	RD14BB2E511J	RES. CARBON	510	5%	1/4W
R136	RD14BB2E123J	RES. CARBON	12K	5%	1/4W
R137	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R138	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R139	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R140	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R141	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R142	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R143	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R144	RD14BB2E272J	RES. CARBON	2.7K	5%	1/4W
R145	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R146	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R147	RD14BB2E272J	RES. CARBON	2.7K	5%	1/4W
R148	RD14BB2E223J	RES. CARBON	22K	5%	1/4W
R149	RD14BB2E682J	RES. CARBON	6.8K	5%	1/4W
R150	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R151	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R152	RD14BB2E151J	RES. CARBON	150	5%	1/4W
R153	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R154	NO USE				
R155	RD14BB2E470J	RES. CARBON	47	5%	1/4W
R156	NO USE				
R157	RD14BB2E821J	RES. CARBON	820	5%	1/4W
R158	NO USE				
R159	RD14BB2E682J	RES. CARBON	6.8K	5%	1/4W
R160	RD14BB2C153J	RES. CARBON	15K	5%	1/6W
R301	RD14BB2E473J	RES. CARBON	47K	5%	1/4W
R302	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R303	RD14BB2E3R3J	RES. CARBON	3.3	5%	1/4W
R304	RD14BB2E100J	RES. CARBON	10	5%	1/4W
R305	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R306	RD14BB2E822J	RES. CARBON	8.2K	5%	1/4W
R307	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R308	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R309	RN14BK2E1502F	RES. METAL FILM	15K	1%	1/4W
R310	RN14BK2E1003F	RES. METAL FILM	100K	1%	1/4W
R311	RN14BK2E1602F	RES. METAL FILM	16K	1%	1/4W
R312	RN14BK2E1503F	RES. METAL FILM	150K	1%	1/4W
R313	RD14BY2H104J	RES. CARBON	100K	5%	1/2W
R314	RD14BY2H104J	RES. CARBON	100K	5%	1/2W
S101	S42-4509-05	PUSH SWITCH			
S102	S42-4509-05	PUSH SWITCH			
TC001	C05-0425-05	CAP. TRIMMER	70P		
TC002	C05-0425-05	CAP. TRIMMER	70P		
TC101	C05-0434-05	CAP. TRIMMER	20P		
TC102	C05-0434-05	CAP. TRIMMER	20P		
TP001	E23-0046-04	TERMINAL			
TP002	E23-0046-04	TERMINAL			
TP003	E23-0046-04	TERMINAL			
TP101	E23-0046-04	TERMINAL			
TP102	E23-0046-04	TERMINAL			
TP103	E23-0046-04	TERMINAL			
TP104	E23-0046-04	TERMINAL			
U001	2SK389(GR)	FET, N-CHANNEL			
U101	2SK389(GR)	FET, N-CHANNEL			
U301	UPC7805H	IC, VOLTAGE REGULATOR			
U302	UPC7915HA	IC, VOLTAGE REGULATOR			
U303	NJM7815A	IC, VOLTAGE REGULATOR			
U304	NJM4558D	IC, OP AMP			
VR001	R05-3509-05	V.R.	20K B		
VR002	R12-3541-05	RES. SEMI FIXED	20K B		
VR003	R12-0566-05	RES. SEMI FIXED	200 B		
VR004	R12-0565-05	RES. SEMI FIXED	100 B		
VR005	R12-0561-05	RES. SEMI FIXED	100 B		
VR006	R12-0565-05	RES. SEMI FIXED	100 B		
VR101	R05-3509-05	V.R.	20K B		
VR102	R12-3541-05	RES. SEMI FIXED	20K B		
VR103	R12-0565-05	RES. SEMI FIXED	100 B		
VR104	R12-0567-05	RES. SEMI FIXED	500 B		
VR105	R12-3541-05	RES. SEMI FIXED	20K B		

PARTS LIST

VERTICAL AMP & POWER UNIT

X73-1720-02 (CS-1012)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	E23-0526-04	EARTH PLATE			
	E31-2706-05	LEAD WIRE WITH CONNECTOR			
	E33-4031-00	WIRE ASSY			
	F01-0835-05	HEAT SINK			
	F01-0836-04	HEAT SINK			
	J25-2999-23	PCB (UNMOUNTED)			
	J61-0517-05	STADOFF CLIP			
	N19-0191-05	WASHER NONMETAL			
	N19-0702-04	WASHER			
	N30-3008-46	SCREW, PAN HD	M 3X8		
	R92-0150-05	JUMPING RES.	ZERO OHM		
C006	CC45SL1H471J	CAP. CERAMIC	470P	5%	50V
C007	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C008	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C009	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C010	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C011	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C012	NO USE				
C013	CC45CH1H470J	CAP. CERAMIC	47P	5%	50V
C014	CE04W1E220M	CAP. ELECTRO	22	20%	25V
C015	NO USE				
C016	CE04W1E220M	CAP. ELECTRO	22	20%	25V
C017	CE04BW1E220M	CAP. ELECTRO	22	20%	25V
C021	CC45CH1H020C	CAP. CERAMIC	2P	0.25P	50V
C022	CC45CH1H1R5C	CAP. CERAMIC	1.5P	0.25P	50V
C023	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C104	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C105	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C106	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C107	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C108	NO USE				
C109	CC45CH1H470J	CAP. CERAMIC	47P	5%	50V
C110	CC45CH1H470J	CAP. CERAMIC	47P	5%	50V
C111	CE04BW1H010M	CAP. ELECTRO	1	20%	50V
C112	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C116	CC45CH1H1R5C	CAP. CERAMIC	1.5P	0.25P	50V
C117	CC45CH1H1R5C	CAP. CERAMIC	1.5P	0.25P	50V
C118	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C301	CE04W1V222M	CAP. ELECTRO	2200	20%	35V
C302	CE04W1V222M	CAP. ELECTRO	2200	20%	35V
C303	CE04W1E222M	CAP. ELECTRO	2200	20%	25V
C304	C90-0910-05	CAP. ELECTRO	100	20%	200V
C305	CE04W2E470	CAP. ELECTRO	47		250V
C306	CE04W1A101M	CAP. ELECTRO	100	20%	10V
C307	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C308	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C309	CE04W2C100	CAP. ELECTRO	10		160V
C310	CE04W2E010	CAP. ELECTRO	1		250V
C311	CE04BW1H010M	CAP. ELECTRO	1	20%	50V
C312	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C313	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C314	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C315	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C316	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C317	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V
C318	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C319	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C320	CK45B2H103K	CAP. CERAMIC	0.01	10%	500V
C321	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C324	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
D001	DS442X	DIODE			
D002	DS442X	DIODE			
D003	DS442X	DIODE			
D101	DS442X	DIODE			
D102	DS442X	DIODE			
D103	DS442X	DIODE			
D104	DS442X	DIODE			
D105	DS442X	DIODE			
D106	DS442X	DIODE			
D107	DS442X	DIODE			
D108	MTZ10JC	DIODE, ZENER	10V		

REF.NO	PARTS NO	NAME & DESCRIPTION			
D301	S2VB40F1	DIODE			
D302	S2VB40F1	DIODE			
D303	S1VB60	DIODE			
D304	S1VB60	DIODE			
D305	DS442X	DIODE			
D306	DS442X	DIODE			
D307	V06B	DIODE			
L001	L40-1025-03	FERRI INDUCTOR			
L002	L40-1025-03	FERRI INDUCTOR			
P001	E40-0473-05	PIN CONNECTOR	4 P		
P002	E40-0273-05	PIN CONNECTOR	2 P		
P003	E04-0154-05	BNC RECEPTACLE			
P004	E23-0046-04	TERMINAL			
P005	E23-0046-04	TERMINAL			
P101	E40-0473-05	PIN CONNECTOR	4 P		
P301	E40-0930-05	PIN CONNECTOR	9 P		
P302	E40-1116-05	PIN CONNECTOR	11 P		
P303	E40-1116-05	PIN CONNECTOR	11 P		
Q002	2SA1005(K)	TR. SI, PNP			
Q003	2SA1005(K)	TR. SI, PNP			
Q004	2SC2786(K)	TR. SI, NPN			
Q005	2SC2785(F)	TR. SI, NPN			
Q006	2SC2785(F)	TR. SI, NPN			
Q007	2SC2785(F)	TR. SI, NPN			
Q008	2SA1005(K)	TR. SI, PNP			
Q009	2SC2785(F)	TR. SI, NPN			
Q010	2SC2785(F)	TR. SI, NPN			
Q011	2SC2785(F)	TR. SI, NPN			
Q012	2SC2785(F)	TR. SI, NPN			
Q013	2SC2785(F)	TR. SI, NPN			
Q014	2SC2785(F)	TR. SI, NPN			
Q015	2SC1973	TR. SI, NPN			
Q016	2SC1973	TR. SI, NPN			
Q017	2SC2912(R,S)	TR. SI, NPN			
Q018	2SC2912(R,S)	TR. SI, NPN			
Q102	2SA1005(K)	TR. SI, PNP			
Q103	2SA1005(K)	TR. SI, PNP			
Q104	2SC2786(K)	TR. SI, NPN			
Q105	2SC2785(F)	TR. SI, NPN			
Q106	2SC2785(F)	TR. SI, NPN			
Q107	2SC2785(F)	TR. SI, NPN			
Q108	2SC2785(F)	TR. SI, NPN			
Q109	2SC2785(F)	TR. SI, NPN			
Q110	2SC2785(F)	TR. SI, NPN			
Q111	2SC2785(F)	TR. SI, NPN			
Q112	2SC2785(F)	TR. SI, NPN			
Q113	2SA1175(F)	TR. SI, PNP			
Q114	2SC2785(F)	TR. SI, NPN			
Q115	2SC2785(F)	TR. SI, NPN			
Q301	2SA1009A(J,K)	TR. SI, PNP			
Q302	2SA1009A(J,K)	TR. SI, PNP			
Q303	2SA1175(F)	TR. SI, PNP			
Q304	2SA1175(F)	TR. SI, PNP			
Q305	2SC2271(E)	TR. SI, NPN			
Q306	2SC2271(E)	TR. SI, NPN			
R001	RD14BB2E105J	RES. CARBON	1M	5%	1/4W
R002	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R003	RN14BK2E5601F	RES. METAL FILM	5.6K	1%	1/4W
R004	RN14BK2E5601F	RES. METAL FILM	5.6K	1%	1/4W
R005	RD14BB2C120J	RES. CARBON	12	5%	1/6W
R006	RD14BB2C510J	RES. CARBON	51	5%	1/6W
R007	RD14BB2C510J	RES. CARBON	51	5%	1/6W
R008	RD14BB2E392J	RES. CARBON	3.9K	5%	1/4W
R009	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R010	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R011	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R012	RD14BB2C243J	RES. CARBON	24K	5%	1/6W
R013	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R014	NO USE				
R015	RN14BK2C1301F	RES. METAL FILM	1.3K	1%	1/6W
R016	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R017	RD14BB2C302J	RES. CARBON	3K	5%	1/6W
R018	RD14BB2C753J	RES. CARBON	75K	5%	1/6W
R019	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R020	RD14BB2E331J	RES. CARBON	330	5%	1/4W
R021	RD14BB2E331J	RES. CARBON	330	5%	1/4W
R022	NO USE				
R023	RD14BB2E220J	RES. CARBON	22	5%	1/4W

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION			
R024	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R025	RD14BB2E510J	RES. CARBON	51	5%	1/4W
R026	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R027	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R028	RD14BB2E270J	RES. CARBON	27	5%	1/4W
R029	RD14BB2E270J	RES. CARBON	27	5%	1/4W
R030	RD14BB2E300J	RES. CARBON	30	5%	1/4W
R031	RD14BB2E470J	RES. CARBON	47	5%	1/4W
R032	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R033	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R034	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R035	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R036	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R037	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R038	RD14BB2E750J	RES. CARBON	75	5%	1/4W
R039	RD14BB2E431J	RES. CARBON	430	5%	1/4W
R040	RD14BB2E682J	RES. CARBON	6.8K	5%	1/4W
R041	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R042	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R043	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R044	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R045	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R046	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R047	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R048	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R049	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R050	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R051	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R052	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R053	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R054	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R055	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R056	RD14BB2E750J	RES. CARBON	75	5%	1/4W
R057	RD14BB2E121J	RES. CARBON	120	5%	1/4W
R058	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R059	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R060	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R061	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R062	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R063	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R064	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R065	RD14BB2E201J	RES. CARBON	200	5%	1/4W
R066	RD14BB2E182J	RES. CARBON	1.8K	5%	1/4W
R067	RD14BB2E272J	RES. CARBON	2.7K	5%	1/4W
R070	RD14BB2C153J	RES. CARBON	15K	5%	1/6W
R071	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R101	RD14BB2E105J	RES. CARBON	1M	5%	1/4W
R102	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R103	RN14BK2E5601F	RES. METAL FILM	5.6K	1%	1/4W
R104	RN14BK2E5601F	RES. METAL FILM	5.6K	1%	1/4W
R105	RD14BB2C120J	RES. CARBON	12	5%	1/6W
R106	RD14BB2C510J	RES. CARBON	51	5%	1/6W
R107	RD14BB2C510J	RES. CARBON	51	5%	1/6W
R108	RD14BB2C392J	RES. CARBON	3.9K	5%	1/6W
R109	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R110	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R111	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R112	RD14BB2C243J	RES. CARBON	24K	5%	1/6W
R113	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R114	NO USE				
R115	RD14BB2C753J	RES. CARBON	75K	5%	1/6W
R116	RN14BK2C1301F	RES. METAL FILM	1.3K	1%	1/6W
R117	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R118	RD14BB2E182J	RES. CARBON	1.8K	5%	1/4W
R119	NO USE				
R120	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R121	RD14BB2E561J	RES. CARBON	560	5%	1/4W
R122	NO USE				
R123	RD14BB2E333J	RES. CARBON	33K	5%	1/4W
R124	RD14BB2E470J	RES. CARBON	47	5%	1/4W
R125	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R126	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R127	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W
R128	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R129	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R130	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R131	RD14BB2E750J	RES. CARBON	75	5%	1/4W
R132	RN14BK2E2001F	RES. METAL FILM	2K	1%	1/4W
R133	RN14BK2E2001F	RES. METAL FILM	2K	1%	1/4W
R134	RD14BB2E510J	RES. CARBON	51	5%	1/4W
R135	RD14BB2E511J	RES. CARBON	510	5%	1/4W
R136	RD14BB2E123J	RES. CARBON	12K	5%	1/4W
R137	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R138	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R139	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R140	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R141	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R142	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R143	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R144	RD14BB2E272J	RES. CARBON	2.7K	5%	1/4W
R145	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R146	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R147	RD14BB2E272J	RES. CARBON	2.7K	5%	1/4W
R148	RD14BB2E223J	RES. CARBON	22K	5%	1/4W
R149	RD14BB2E682J	RES. CARBON	6.8K	5%	1/4W
R150	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R151	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R152	RD14BB2E151J	RES. CARBON	150	5%	1/4W
R153	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R154	NO USE				
R155	RD14BB2E470J	RES. CARBON	47	5%	1/4W
R156	NO USE				
R157	RD14BB2E362J	RES. CARBON	3.6K	5%	1/4W
R158	NO USE				
R159	RD14BB2E223J	RES. CARBON	22K	5%	1/4W
R160	RD14BB2C153J	RES. CARBON	15K	5%	1/6W
R301	RD14BB2E473J	RES. CARBON	47K	5%	1/4W
R302	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R303	RD14BB2E3R3J	RES. CARBON	3.3	5%	1/4W
R304	RD14BB2E100J	RES. CARBON	10	5%	1/4W
R305	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R306	RD14BB2E822J	RES. CARBON	8.2K	5%	1/4W
R307	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R308	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R309	RN14BK2E1502F	RES. METAL FILM	15K	1%	1/4W
R310	RN14BK2E1003F	RES. METAL FILM	100K	1%	1/4W
R311	RN14BK2E1602F	RES. METAL FILM	16K	1%	1/4W
R312	RN14BK2E1503F	RES. METAL FILM	150K	1%	1/4W
R313	RD14BY2H104J	RES. CARBON	100K	5%	1/2W
R314	RD14BY2H104J	RES. CARBON	100K	5%	1/2W
S101	S42-4509-05	PUSH SWITCH			
S102	S42-4509-05	PUSH SWITCH			
TC001	C05-0425-05	CAP. TRIMMER	70P		
TC002	C05-0425-05	CAP. TRIMMER	70P		
TC101	C05-0434-05	CAP. TRIMMER	20P		
TC102	C05-0434-05	CAP. TRIMMER	20P		
TP001	E23-0046-04	TERMINAL			
TP002	E23-0046-04	TERMINAL			
TP003	E23-0046-04	TERMINAL			
TP101	E23-0046-04	TERMINAL			
TP102	E23-0046-04	TERMINAL			
TP103	E23-0046-04	TERMINAL			
TP104	E23-0046-04	TERMINAL			
U001	2SK389(GR)	FET, N-CHANNEL			
U101	2SK389(GR)	FET, N-CHANNEL			
U301	UPC7805H	IC, VOLTAGE REGULATOR			
U302	UPC7915HA	IC, VOLTAGE REGULATOR			
U303	NJM7815A	IC, VOLTAGE REGULATOR			
U304	NJM4558D	IC, OP AMP			
VR001	R05-3509-05	V.R.	20K B		
VR002	R12-3541-05	RES. SEMI FIXED	20K B		
VR003	R12-0566-05	RES. SEMI FIXED	200 B		
VR004	R12-0565-05	RES. SEMI FIXED	100 B		
VR005	R12-0561-05	RES. SEMI FIXED	100 B		
VR006	R12-0565-05	RES. SEMI FIXED	100 B		
VR014	RN14BK2C1000F	RES. METAL FILM	100	1%	1/6W
VR101	R05-3509-05	V.R.	20K B		
VR102	R12-3541-05	RES. SEMI FIXED	20K B		
VR103	R12-0565-05	RES. SEMI FIXED	100 B		
VR104	R12-0567-05	RES. SEMI FIXED	500 B		
VR105	R12-3541-05	RES. SEMI FIXED	20K B		
VR114	RN14BK2C1000F	RES. METAL FILM	100	1%	1/6W

PARTS LIST

VERTICAL AMP & POWER UNIT

X73-1720-03 (CS-1010)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	E23-0526-04	EARTH PLATE			
	E31-2706-05	LEAD WIRE WITH CONNECTOR			
	E33-4032-00	WIRE ASSY			
	F01-0835-05	HEAT SINK			
	F01-0836-04	HEAT SINK			
	J25-2999-23	PCB (UNMOUNTED)			
	J61-0517-05	STADOFF CLIP			
	N19-0191-05	WASHER NONMETAL			
	N19-0702-04	WASHER			
	N30-3008-46	SCREW, PAN HD	M 3X8		
	R92-0150-05	JUMPING RES.	ZERO OHM		
C006	CC45SL1H471J	CAP. CERAMIC	470P	5%	50V
C007	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C008	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C009	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C010	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C011	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C012	NO USE				
C013	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C014	CE04W1E220M	CAP. ELECTRO	22	20%	25V
C015	NO USE				
C016	CE04W1E220M	CAP. ELECTRO	22	20%	25V
C017	CE04BW1E220M	CAP. ELECTRO	22	20%	25V
C021	CC45CH1H020C	CAP. CERAMIC	2P	0.25P	50V
C022	CC45CH1H1R5C	CAP. CERAMIC	1.5P	0.25P	50V
C023	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C301	CE04W1V222M	CAP. ELECTRO	2200	20%	35V
C302	CE04W1V222M	CAP. ELECTRO	2200	20%	35V
C303	CE04W1E222M	CAP. ELECTRO	2200	20%	25V
C304	C90-0910-05	CAP. ELECTRO	100	20%	200V
C305	CE04W2E470	CAP. ELECTRO	47		250V
C306	CE04W1A101M	CAP. ELECTRO	100	20%	10V
C307	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C308	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C309	CE04W2C100	CAP. ELECTRO	10		160V
C310	CE04W2E010	CAP. ELECTRO	1		250V
C311	CE04BW1H010M	CAP. ELECTRO	1	20%	50V
C312	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C313	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C314	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C315	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C316	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C317	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V
C318	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C319	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C320	CK45B2H103K	CAP. CERAMIC	0.01	10%	500V
C321	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C324	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
D001	DS442X	DIODE			
D002	DS442X	DIODE			
D003	DS442X	DIODE			
D301	S2VB40F1	DIODE			
D302	S2VB40F1	DIODE			
D303	S1VB60	DIODE			
D304	S1VB60	DIODE			
D305	DS442X	DIODE			
D306	DS442X	DIODE			
D307	V06B	DIODE			
L001	L40-1025-03	FERRI INDUCTOR			
L002	L40-1025-03	FERRI INDUCTOR			
P001	E40-0473-05	PIN CONNECTOR	4 P		
P002	E40-0273-05	PIN CONNECTOR	2 P		
P003	E04-0154-05	BNC RECEPTACLE			
P004	E23-0046-04	TERMINAL			
P005	E23-0046-04	TERMINAL			
P301	E40-0930-05	PIN CONNECTOR	9 P		
P302	E40-1116-05	PIN CONNECTOR	11 P		
P303	E40-1116-05	PIN CONNECTOR	11 P		
Q002	2SA1005(K)	TR. SI, PNP			
Q003	2SA1005(K)	TR. SI, PNP			
Q004	2SC2786(K)	TR. SI, NPN			
Q005	2SC2785(F)	TR. SI, NPN			
Q007	2SC2785(F)	TR. SI, NPN			
Q008	2SA1005(K)	TR. SI, PNP			
Q009	2SC2785(F)	TR. SI, NPN			
Q010	2SC2785(F)	TR. SI, NPN			
Q011	2SC2785(F)	TR. SI, NPN			
Q012	2SC2785(F)	TR. SI, NPN			
Q013	2SC2785(F)	TR. SI, NPN			
Q014	2SC2785(F)	TR. SI, NPN			
Q015	2SC1973	TR. SI, NPN			
Q016	2SC1973	TR. SI, NPN			
Q017	2SC2912(R,S)	TR. SI, NPN			
Q018	2SC2912(R,S)	TR. SI, NPN			
Q301	2SA1009A(J,K)	TR. SI, PNP			
Q302	2SA1009A(J,K)	TR. SI, PNP			
Q303	2SA1175(F)	TR. SI, PNP			
Q304	2SA1175(F)	TR. SI, PNP			
Q305	2SC2271(E)	TR. SI, NPN			
Q306	2SC2271(E)	TR. SI, NPN			
R001	RD14BB2E105J	RES. CARBON	1M	5%	1/4W
R002	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R003	RN14BK2E5601F	RES. METAL FILM	5.6K	1%	1/4W
R004	RN14BK2E5601F	RES. METAL FILM	5.6K	1%	1/4W
R005	RD14BB2C120J	RES. CARBON	12	5%	1/6W
R006	RD14BB2C510J	RES. CARBON	51	5%	1/6W
R007	RD14BB2C510J	RES. CARBON	51	5%	1/6W
R008	RD14BB2E392J	RES. CARBON	3.9K	5%	1/4W
R009	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R010	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R011	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R012	RD14BB2C243J	RES. CARBON	24K	5%	1/6W
R013	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R014	RN14BK2C1000F	RES. METAL FILM	100	1%	1/6W
R015	RN14BK2C1301F	RES. METAL FILM	1.3K	1%	1/6W
R016	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R017	RD14BB2C302J	RES. CARBON	3K	5%	1/6W
R018	RD14BB2C753J	RES. CARBON	75K	5%	1/6W
R019	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R020	RD14BB2E331J	RES. CARBON	330	5%	1/4W
R021	RD14BB2E331J	RES. CARBON	330	5%	1/4W
R022	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R023	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R024	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R025	RD14BB2E510J	RES. CARBON	51	5%	1/4W
R026	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R027	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R028	RD14BB2E270J	RES. CARBON	27	5%	1/4W
R029	RD14BB2E270J	RES. CARBON	27	5%	1/4W
R030	RD14BB2E300J	RES. CARBON	30	5%	1/4W
R031	RD14BB2E470J	RES. CARBON	47	5%	1/4W
R032	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R033	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R034	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R035	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R036	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R037	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R038	RD14BB2E750J	RES. CARBON	75	5%	1/4W
R039	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R040	RD14BB2E682J	RES. CARBON	6.8K	5%	1/4W
R041	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R042	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R043	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R044	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R045	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R046	RD14BB2E162J	RES. CARBON	1.6K	5%	1/4W
R047	NO USE				
R048	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R049	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R050	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R051	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R052	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R053	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R054	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R055	RD14BB2E221J	RES. CARBON	220	5%	1/4W
R056	RD14BB2E750J	RES. CARBON	75	5%	1/4W
R057	RD14BB2E121J	RES. CARBON	120	5%	1/4W
R058	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R059	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R060	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R061	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R062	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R063	RS14GB3F681J	RES. METAL FILM	680	5%	3W
R064	RD14BB2E104J	RES. CARBON	100K	5%	1/4W
R065	RD14BB2E201J	RES. CARBON	200	5%	1/4W

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION			
R066	RD14BB2E182J	RES. CARBON	1.8K	5%	1/4W
R067	RD14BB2E272J	RES. CARBON	2.7K	5%	1/4W
R070	RD14BB2C153J	RES. CARBON	15K	5%	1/6W
R071	RD14BB2C104J	RES. CARBON	100	5%	1/6W
R301	RD14BB2E473J	RES. CARBON	47K	5%	1/4W
R302	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R303	RD14BB2E3R3J	RES. CARBON	3.3	5%	1/4W
R304	RD14BB2E100J	RES. CARBON	10	5%	1/4W
R305	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R306	RD14BB2E822J	RES. CARBON	8.2K	5%	1/4W
R307	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R308	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R309	RN14BK2E1502F	RES. METAL FILM	15K	1%	1/4W
R310	RN14BK2E1003F	RES. METAL FILM	100K	1%	1/4W
R311	RN14BK2E1602F	RES. METAL FILM	16K	1%	1/4W
R312	RN14BK2E1503F	RES. METAL FILM	150K	1%	1/4W
R313	RD14BY2H104J	RES. CARBON	100K	5%	1/2W
R314	RD14BY2H104J	RES. CARBON	100K	5%	1/2W
TC001	C05-0425-05	CAP. TRIMMER	70P		
TC002	C05-0425-05	CAP. TRIMMER	70P		
TC101	C05-0434-05	CAP. TRIMMER	20P		
TP001	E23-0046-04	TERMINAL			
TP002	E23-0046-04	TERMINAL			
TP003	E23-0046-04	TERMINAL			
U001	2SK389(GR)	FET, N-CHANNEL			
U301	UPC7805H	IC, VOLTAGE REGULATOR			
U302	UPC7915HA	IC, VOLTAGE REGULATOR			
U303	NJM7815A	IC, VOLTAGE REGULATOR			
U304	NJM4558D	IC, OP AMP			
VR001	R05-3509-05	V.R.	20K B		
VR002	R12-3541-05	RES. SEMI FIXED	20K B		
VR003	R12-0566-05	RES. SEMI FIXED	200 B		
VR004	R12-0565-05	RES. SEMI FIXED	100 B		
VR005	R12-0561-05	RES. SEMI FIXED	100 B		
VR006	R12-0565-05	RES. SEMI FIXED	100 B		

VERTICAL AMP & POWER UNIT

X73-1720-04 (CS-1021)

REF.NO	PARTS NO	NAME & DESCRIPTION			
	E23-0526-04	EARTH PLATE			
	E31-2584-05	LEAD WIRE WITH CONNECTOR			
	E31-2585-05	LEAD WIRE WITH CONNECTOR			
	E31-2706-05	LEAD WIRE WITH CONNECTOR			
	E33-4031-00	WIRE ASSY			
	F01-0836-04	HEAT SINK			
	J25-2999-23	PCB (UNMOUNTED)			
	N19-0191-05	WASHER NONMETAL			
	N19-0702-04	WASHER			
	N30-3008-46	SCREW, PAN HD	M 3X8		
	R92-0150-05	JUMPING RES.	ZERO OHM		
C006	CC45CH1H121J	CAP. CERAMIC	120P	5%	50V
C007	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C008	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C009	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C013	CC45CH1H470J	CAP. CERAMIC	47P	5%	50V
C014	CE04W1E220M	CAP. ELECTRO	22	20%	25V
C015	NO USE				
C016	CE04W1E220M	CAP. ELECTRO	22	20%	25V
C021	CC45CH1H020C	CAP. CERAMIC	2P	0.25P	50V
C022	CC45CH1H1R5C	CAP. CERAMIC	1.5P	0.25P	50V
C023	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C103	CC45CH1H100D	CAP. CERAMIC	10P	0.5P	50V
C104	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C105	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C106	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C107	CE04W1E470M	CAP. ELECTRO	47	20%	25V
C108	NO USE				
C109	CC45CH1H470J	CAP. CERAMIC	47P	5%	50V
C110	CC45CH1H470J	CAP. CERAMIC	47P	5%	50V
C111	CE04BW1H010M	CAP. ELECTRO	1	20%	50V
C112	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C116	CC45CH1H020C	CAP. CERAMIC	2P	0.25P	50V
C117	CC45CH1H1R5C	CAP. CERAMIC	1.5P	0.25P	50V
C118	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C119	NO USE				
C120	CC45CH1H121J	CAP. CERAMIC	120P	5%	50V
C301	CE04W1V222M	CAP. ELECTRO	2200	20%	35V
C302	CE04W1V222M	CAP. ELECTRO	2200	20%	35V
C303	CE04W1E222M	CAP. ELECTRO	2200	20%	25V
C304	C90-0910-05	CAP. ELECTRO	100	20%	200V
C305	CE04W2E470	CAP. ELECTRO	47		250V
C306	CE04W1A101M	CAP. ELECTRO	100	20%	10V
C307	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C308	CE04W1E101M	CAP. ELECTRO	100	20%	25V
C309	CE04W2C100	CAP. ELECTRO	10		160V
C310	CE04W2E010	CAP. ELECTRO	1		250V
C311	CE04BW1H010M	CAP. ELECTRO	1	20%	50V
C312	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C313	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C314	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C315	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C316	CE04W1H010M	CAP. ELECTRO	1	20%	50V
C317	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V
C318	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C319	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V
C320	CK45B2H103K	CAP. CERAMIC	0.01	10%	500V
C321	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
C324	CK45B1H103K	CAP. CERAMIC	0.01	10%	50V
D001	DS442X	DIODE			
D101	DS442X	DIODE			
D102	DS442X	DIODE			
D103	DS442X	DIODE			
D104	DS442X	DIODE			
D105	DS442X	DIODE			
D106	DS442X	DIODE			
D107	DS442X	DIODE			
D108	MTZ10JC	DIODE, ZENER	10V		
D301	S2VB40F1	DIODE			
D302	S2VB40F1	DIODE			
D303	S1VB60	DIODE			
D304	S1VB60	DIODE			


PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION			
D305	DS442X	DIODE			
D306	DS442X	DIODE			
D307	V06B	DIODE			
P001	E40-0473-05	PIN CONNECTOR	4 P		
P002	E40-0273-05	PIN CONNECTOR	2 P		
P101	E40-0473-05	PIN CONNECTOR	4 P		
P301	E40-0930-05	PIN CONNECTOR	9 P		
P302	E40-1116-05	PIN CONNECTOR	11 P		
P303	E40-1116-05	PIN CONNECTOR	11 P		
Q002	2SA1005(K)	TR. SI, PNP			
Q003	2SA1005(K)	TR. SI, PNP			
Q004	2SC3354(T,S)	TR. SI, NPN			
Q005	2SC2786(K)	TR. SI, NPN			
Q009	2SC2786(K)	TR. SI, NPN			
Q010	2SC2786(K)	TR. SI, NPN			
Q011	2SC2786(K)	TR. SI, NPN			
Q012	2SC2786(K)	TR. SI, NPN			
Q013	2SC2786(K)	TR. SI, NPN			
Q014	2SC2786(K)	TR. SI, NPN			
Q015	2SC2407	TR. SI, NPN			
Q016	2SC2407	TR. SI, NPN			
Q102	2SA1005(K)	TR. SI, PNP			
Q103	2SA1005(K)	TR. SI, PNP			
Q104	2SC3354(T,S)	TR. SI, NPN			
Q105	2SC2786(K)	TR. SI, NPN			
Q106	2SC2785(F)	TR. SI, NPN			
Q107	2SC2786(K)	TR. SI, NPN			
Q108	2SC2786(K)	TR. SI, NPN			
Q109	2SC2786(K)	TR. SI, NPN			
Q110	2SC2786(K)	TR. SI, NPN			
Q111	2SC2786(K)	TR. SI, NPN			
Q112	2SC2786(K)	TR. SI, NPN			
Q113	2SA1175(F)	TR. SI, PNP			
Q114	2SC2785(F)	TR. SI, NPN			
Q115	2SC2786(K)	TR. SI, NPN			
Q301	2SA1009A(J,K)	TR. SI, PNP			
Q302	2SA1009A(J,K)	TR. SI, PNP			
Q303	2SA1175(F)	TR. SI, PNP			
Q304	2SA1175(F)	TR. SI, PNP			
Q305	2SC2271(E)	TR. SI, NPN			
Q306	2SC2271(E)	TR. SI, NPN			
R001	RD14BB2E105J	RES. CARBON	1M	5%	1/4W
R002	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R003	RN14BK2E5601F	RES. METAL FILM	5.6K	1%	1/4W
R004	RN14BK2E5601F	RES. METAL FILM	5.6K	1%	1/4W
R005	RD14BB2C120J	RES. CARBON	12	5%	1/6W
R006	RD14BB2C510J	RES. CARBON	51	5%	1/6W
R007	RD14BB2C510J	RES. CARBON	51	5%	1/6W
R008	RD14BB2E392J	RES. CARBON	3.9K	5%	1/4W
R009	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R010	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R011	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R012	RD14BB2C243J	RES. CARBON	24K	5%	1/6W
R013	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R016	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R017	RD14BB2C302J	RES. CARBON	3K	5%	1/6W
R018	RD14BB2C753J	RES. CARBON	75K	5%	1/6W
R019	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R020	NO USE				
R021	RD14BB2E331J	RES. CARBON	330	5%	1/4W
R031	RD14BB2E151J	RES. CARBON	150	5%	1/4W
R032	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R033	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R034	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R035	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R036	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R037	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R038	RD14BB2E750J	RES. CARBON	75	5%	1/4W
R039	RD14BB2E431J	RES. CARBON	430	5%	1/4W
R040	RD14BB2E682J	RES. CARBON	6.8K	5%	1/4W
R041	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R042	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R043	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R044	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R045	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R046	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R047	RN14BK2E8200F	RES. METAL FILM	820	1%	1/4W
R048	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R049	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R050	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R051	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R052	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R053	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R054	RD14BB2E331J	RES. CARBON	330	5%	1/4W
R055	RD14BB2E331J	RES. CARBON	330	5%	1/4W
R056	RD14BB2E750J	RES. CARBON	75	5%	1/4W
R065	RD14BB2E201J	RES. CARBON	200	5%	1/4W
R066	RD14BB2E201J	RES. CARBON	200	5%	1/4W
R067	RD14BB2E272J	RES. CARBON	2.7K	5%	1/4W
R070	RD14BB2C153J	RES. CARBON	15K	5%	1/6W
R101	RD14BB2E105J	RES. CARBON	1M	5%	1/4W
R102	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R103	RN14BK2E5601F	RES. METAL FILM	5.6K	1%	1/4W
R104	RN14BK2E5601F	RES. METAL FILM	5.6K	1%	1/4W
R105	RD14BB2C120J	RES. CARBON	12	5%	1/6W
R106	RD14BB2C510J	RES. CARBON	51	5%	1/6W
R107	RD14BB2C510J	RES. CARBON	51	5%	1/6W
R108	RD14BB2C392J	RES. CARBON	3.9K	5%	1/6W
R109	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R110	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R111	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R112	RD14BB2C243J	RES. CARBON	24K	5%	1/6W
R113	RD14BB2E302J	RES. CARBON	3K	5%	1/4W
R114	NO USE				
R115	RD14BB2C753J	RES. CARBON	75K	5%	1/6W
R116	NO USE				
R117	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R118	RD14BB2E182J	RES. CARBON	1.8K	5%	1/4W
R119	NO USE				
R120	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R121	RD14BB2E561J	RES. CARBON	560	5%	1/4W
R122	NO USE				
R123	RD14BB2E333J	RES. CARBON	33K	5%	1/4W
R124	RD14BB2E151J	RES. CARBON	150	5%	1/4W
R125	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R126	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R127	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W
R128	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R129	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R130	RN14BK2E2201F	RES. METAL FILM	2.2K	1%	1/4W
R131	RD14BB2E750J	RES. CARBON	75	5%	1/4W
R132	RN14BK2E2001F	RES. METAL FILM	2K	1%	1/4W
R133	RN14BK2E2001F	RES. METAL FILM	2K	1%	1/4W
R134	RD14BB2E510J	RES. CARBON	51	5%	1/4W
R135	RD14BB2E511J	RES. CARBON	510	5%	1/4W
R136	RD14BB2E123J	RES. CARBON	12K	5%	1/4W
R137	RD14BB2E472J	RES. CARBON	4.7K	5%	1/4W
R138	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R139	RD14BB2E332J	RES. CARBON	3.3K	5%	1/4W
R140	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R141	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R142	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R143	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R144	RD14BB2E272J	RES. CARBON	2.7K	5%	1/4W
R145	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R146	RD14BB2E153J	RES. CARBON	15K	5%	1/4W
R147	RD14BB2E272J	RES. CARBON	2.7K	5%	1/4W
R148	RD14BB2E223J	RES. CARBON	22K	5%	1/4W
R149	RD14BB2E682J	RES. CARBON	6.8K	5%	1/4W
R150	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R151	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R152	RD14BB2E151J	RES. CARBON	150	5%	1/4W
R153	RD14BB2E101J	RES. CARBON	100	5%	1/4W
R154	NO USE				
R155	RD14BB2E470J	RES. CARBON	47	5%	1/4W
R156	NO USE				
R157	RD14BB2E331J	RES. CARBON	330	5%	1/4W
R158	NO USE				
R159	RD14BB2E682J	RES. CARBON	6.8K	5%	1/4W
R160	RD14BB2C153J	RES. CARBON	15K	5%	1/6W
R301	RD14BB2E473J	RES. CARBON	47K	5%	1/4W
R302	RD14BB2E102J	RES. CARBON	1K	5%	1/4W
R303	RD14BB2E3R3J	RES. CARBON	3.3	5%	1/4W
R304	RD14BB2E100J	RES. CARBON	10	5%	1/4W
R305	RD14BB2E562J	RES. CARBON	5.6K	5%	1/4W
R306	RD14BB2E822J	RES. CARBON	8.2K	5%	1/4W
R307	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R308	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W


PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION			
R309	RN14BK2E1502F	RES. METAL FILM	15K	1%	1/4W
R310	RN14BK2E1003F	RES. METAL FILM	100K	1%	1/4W
R311	RN14BK2E1602F	RES. METAL FILM	16K	1%	1/4W
R312	RN14BK2E1503F	RES. METAL FILM	150K	1%	1/4W
R313	RD14BY2H104J	RES. CARBON	100K	5%	1/2W
R314	RD14BY2H104J	RES. CARBON	100K	5%	1/2W
S101	S42-4509-05	PUSH SWITCH			
S102	S42-4509-05	PUSH SWITCH			
TC001	C05-0425-05	CAP. TRIMMER	70P		
TC002	C05-0425-05	CAP. TRIMMER	70P		
TC101	C05-0435-05	CAP. TRIMMER	30P		
TC102	C05-0434-05	CAP. TRIMMER	20P		
TP001	E23-0046-04	TERMINAL			
TP002	E23-0046-04	TERMINAL			
TP003	E23-0046-04	TERMINAL			
TP101	E23-0046-04	TERMINAL			
TP102	E23-0046-04	TERMINAL			
TP103	E23-0046-04	TERMINAL			
TP104	E23-0046-04	TERMINAL			
U001	2SK389(GR)	FET, N-CHANNEL			
U101	2SK389(GR)	FET, N-CHANNEL			
U301	UPC7805H	IC, VOLTAGE REGULATOR			
U302	UPC7915HA	IC, VOLTAGE REGULATOR			
U303	NJM7815A	IC, VOLTAGE REGULATOR			
U304	NJM4558D	IC, OP AMP			
VR001	R05-3509-05	V.R.	20K B		
VR002	R12-3541-05	RES. SEMI FIXED	20K B		
VR003	R12-0566-05	RES. SEMI FIXED	200 B		
VR004	R12-0565-05	RES. SEMI FIXED	100 B		
VR005	R12-0561-05	RES. SEMI FIXED	100 B		
VR006	R12-0565-05	RES. SEMI FIXED	100 B		
VR014	RN14BK2C1000F	RES. METAL FILM	100	1%	1/6W
VR015	RN14BK2C1301F	RES. METAL FILM	1.3K	1%	1/6W
VR101	R05-3509-05	V.R.	20K B		
VR102	R12-3541-05	RES. SEMI FIXED	20K B		
VR103	R12-0565-05	RES. SEMI FIXED	100 B		
VR104	R12-0567-05	RES. SEMI FIXED	500 B		
VR105	R12-3541-05	RES. SEMI FIXED	20K B		
VR114	RN14BK2C1000F	RES. METAL FILM	100	1%	1/6W
VR115	NO USE				
VR116	RN14BK2C1301F	RES. METAL FILM	1.3K	1%	1/6W


SCHEMATIC DIAGRAM (CS-1022)

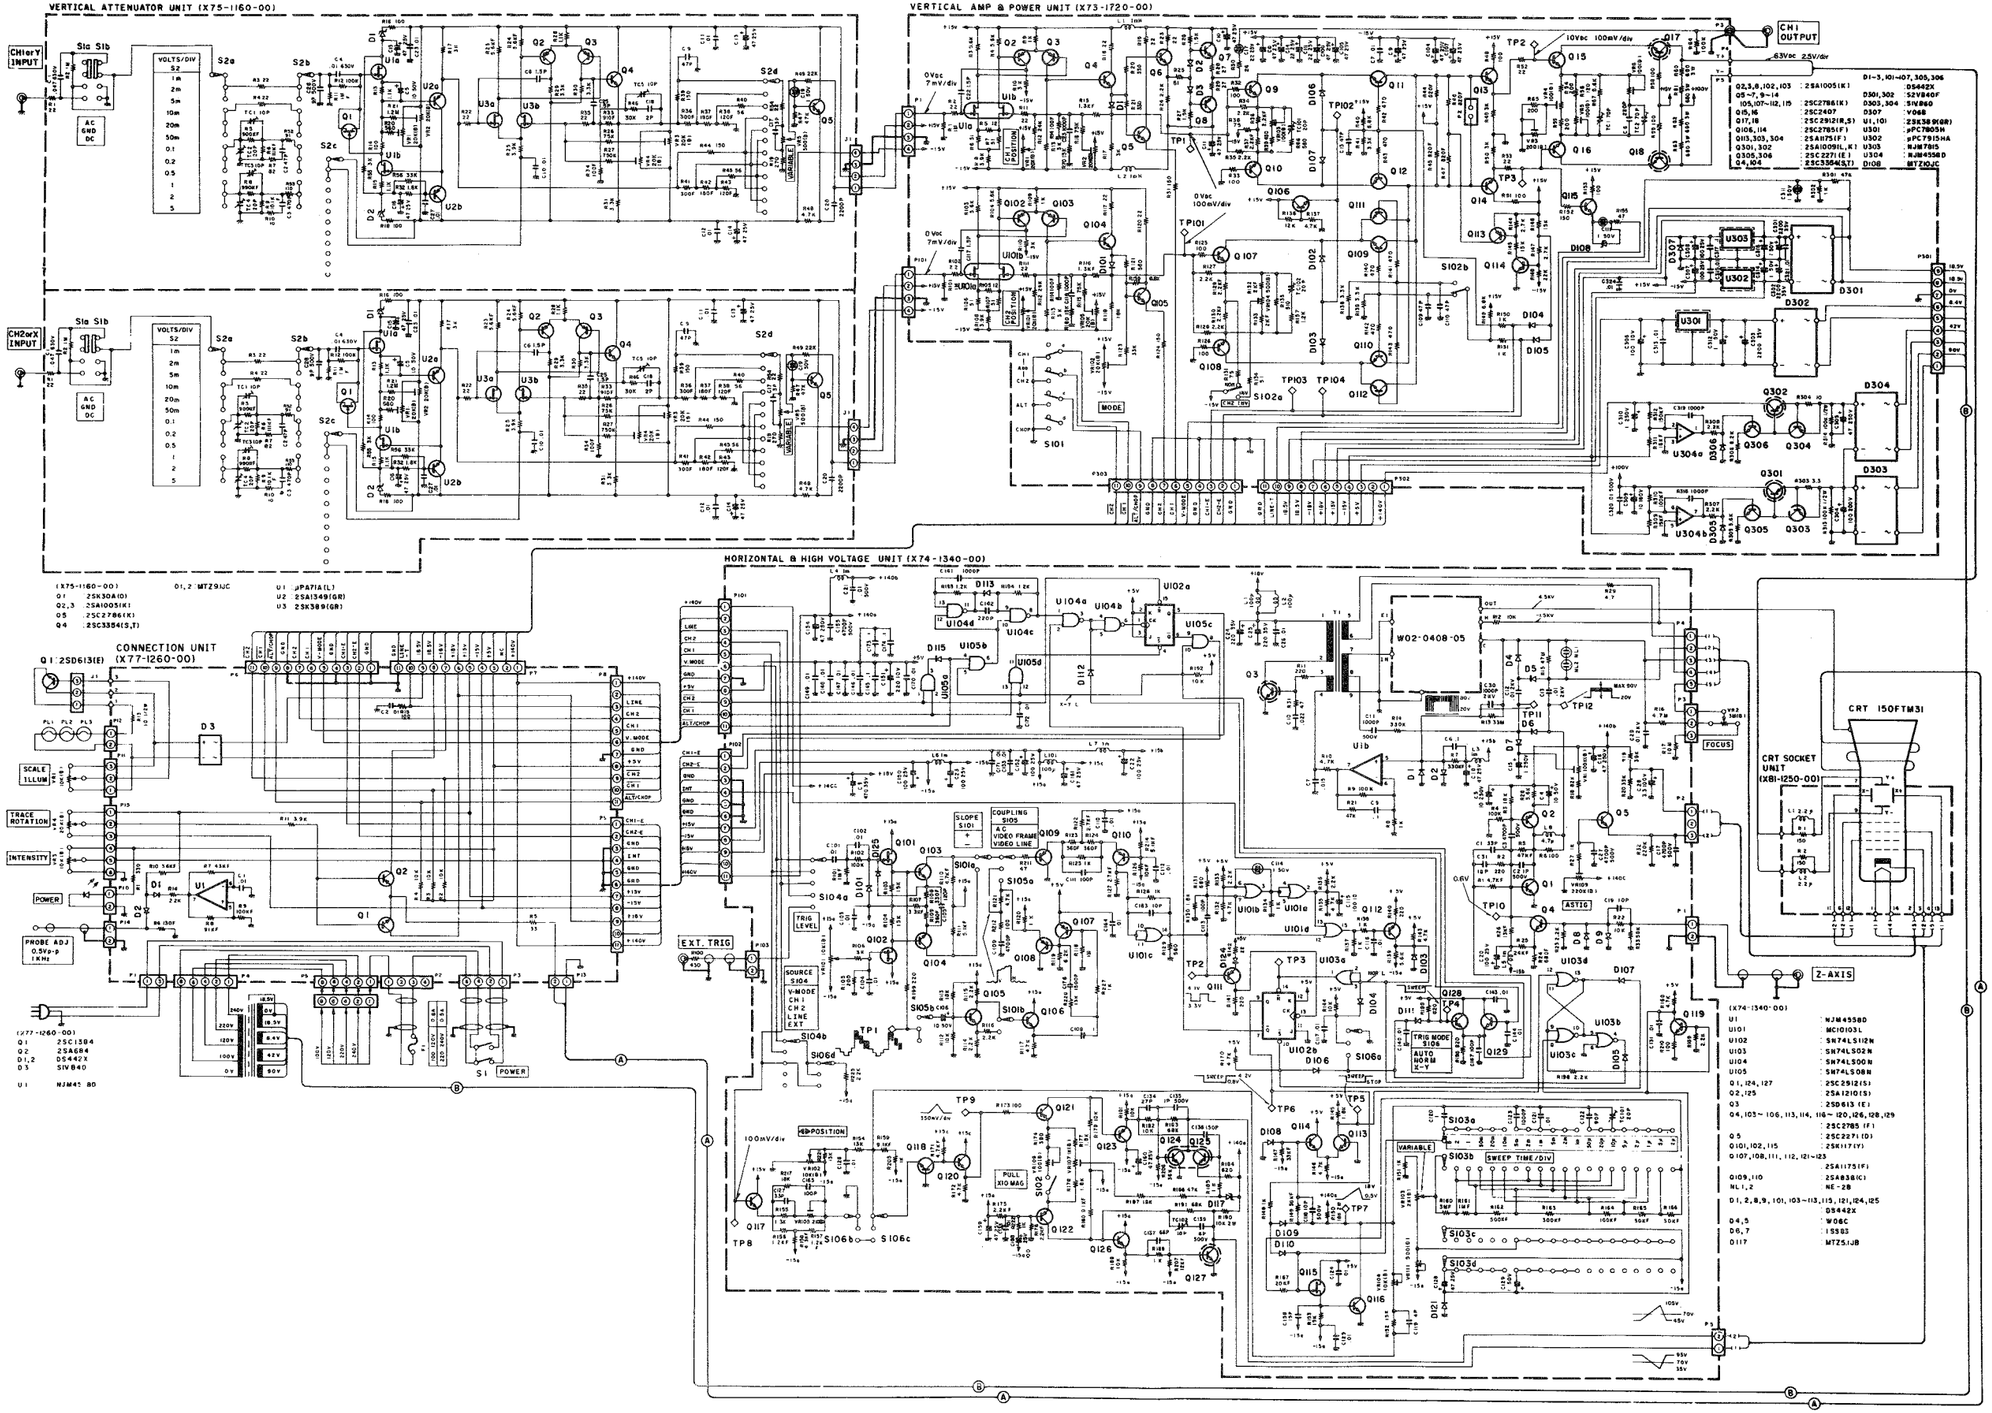

SCHEMATIC DIAGRAM (CS-1021)

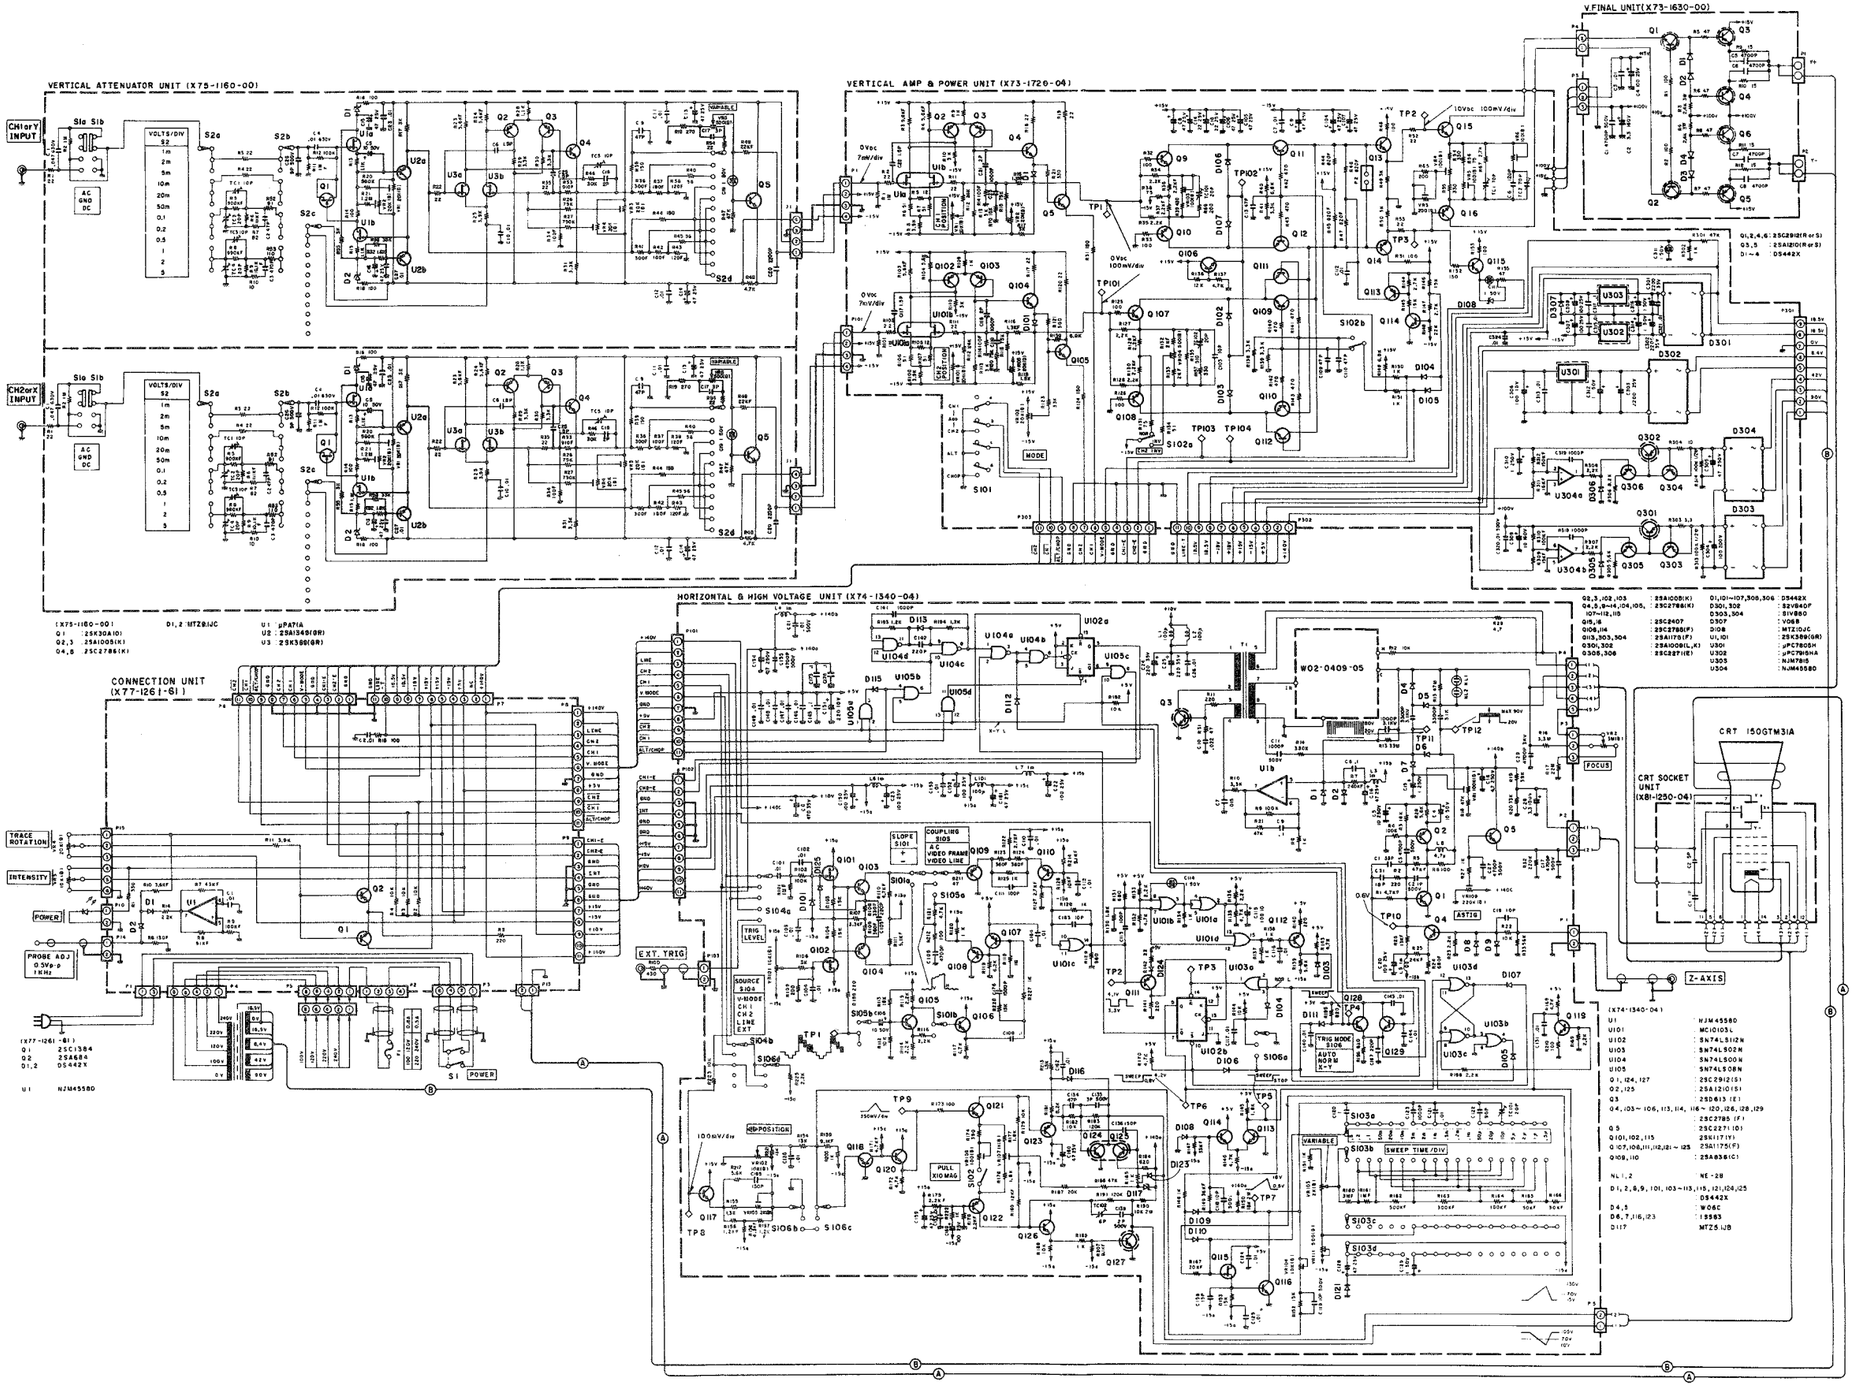


2SK389 (GR)




Pin No.	1	2	3	4	5	6	7
Name	D1	G1	S1	Sub	S2	G2	D2

2SA1349 (GR, BL)




Pin No.	1	2	3	4	5	6	7
Name	B1	C1	E1	Sub	E2	C2	B2

SCHEMATIC DIAGRAM (CS-1012)

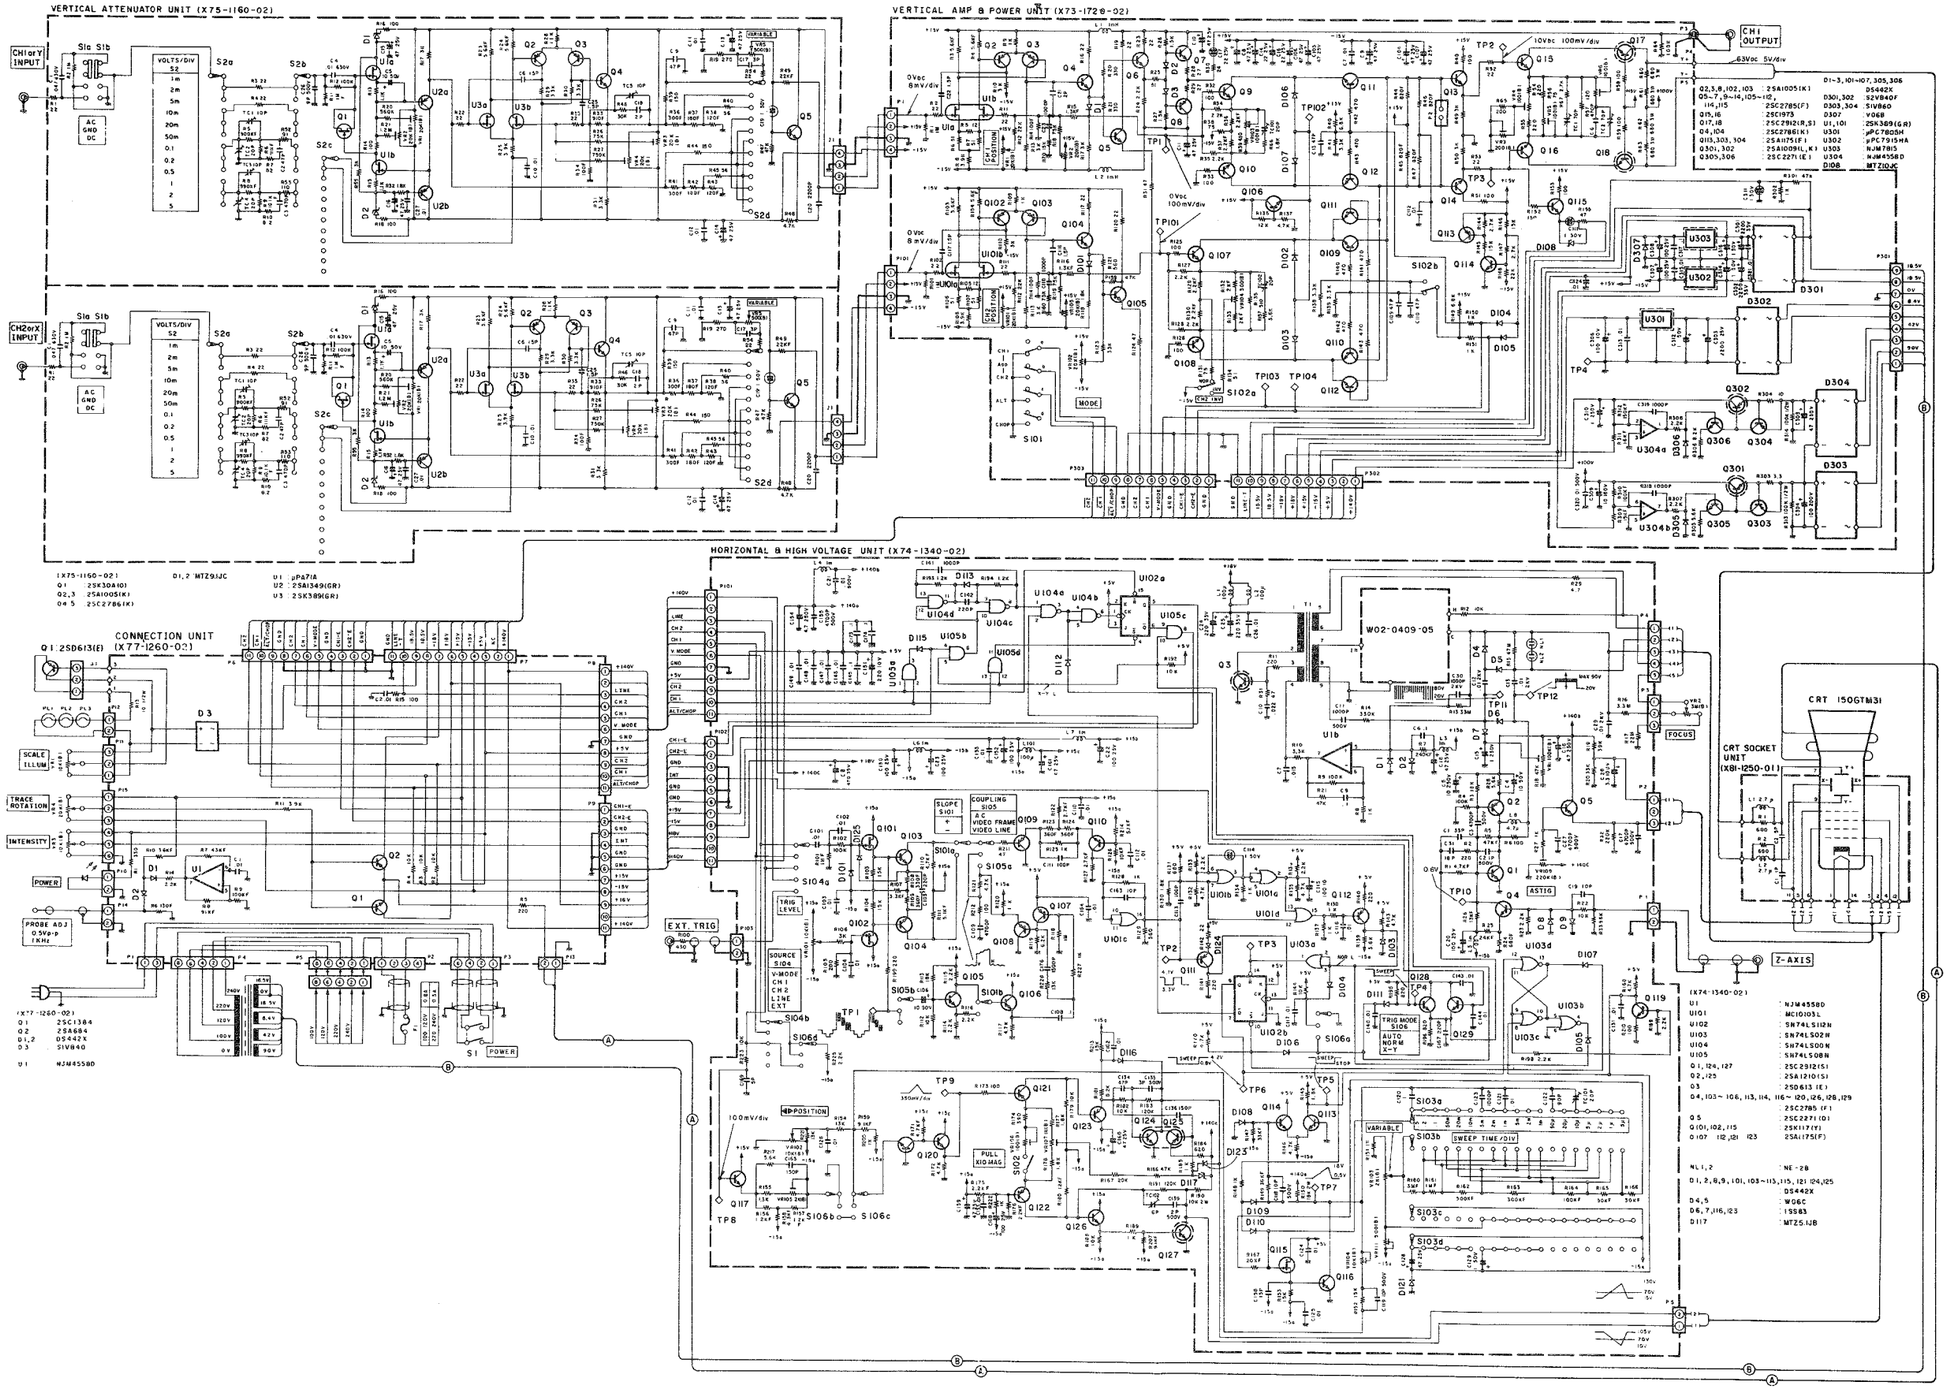


2SK389 (GR)




Pin No.	1	2	3	4	5	6	7
Name	D1	G1	S1	Sub	S2	G2	D2

2SA1349 (GR, BL)




Pin No.	1	2	3	4	5	6	7
Name	B1	C1	E1	Sub	E2	C2	B2

SCHEMATIC DIAGRAM (CS-1010)

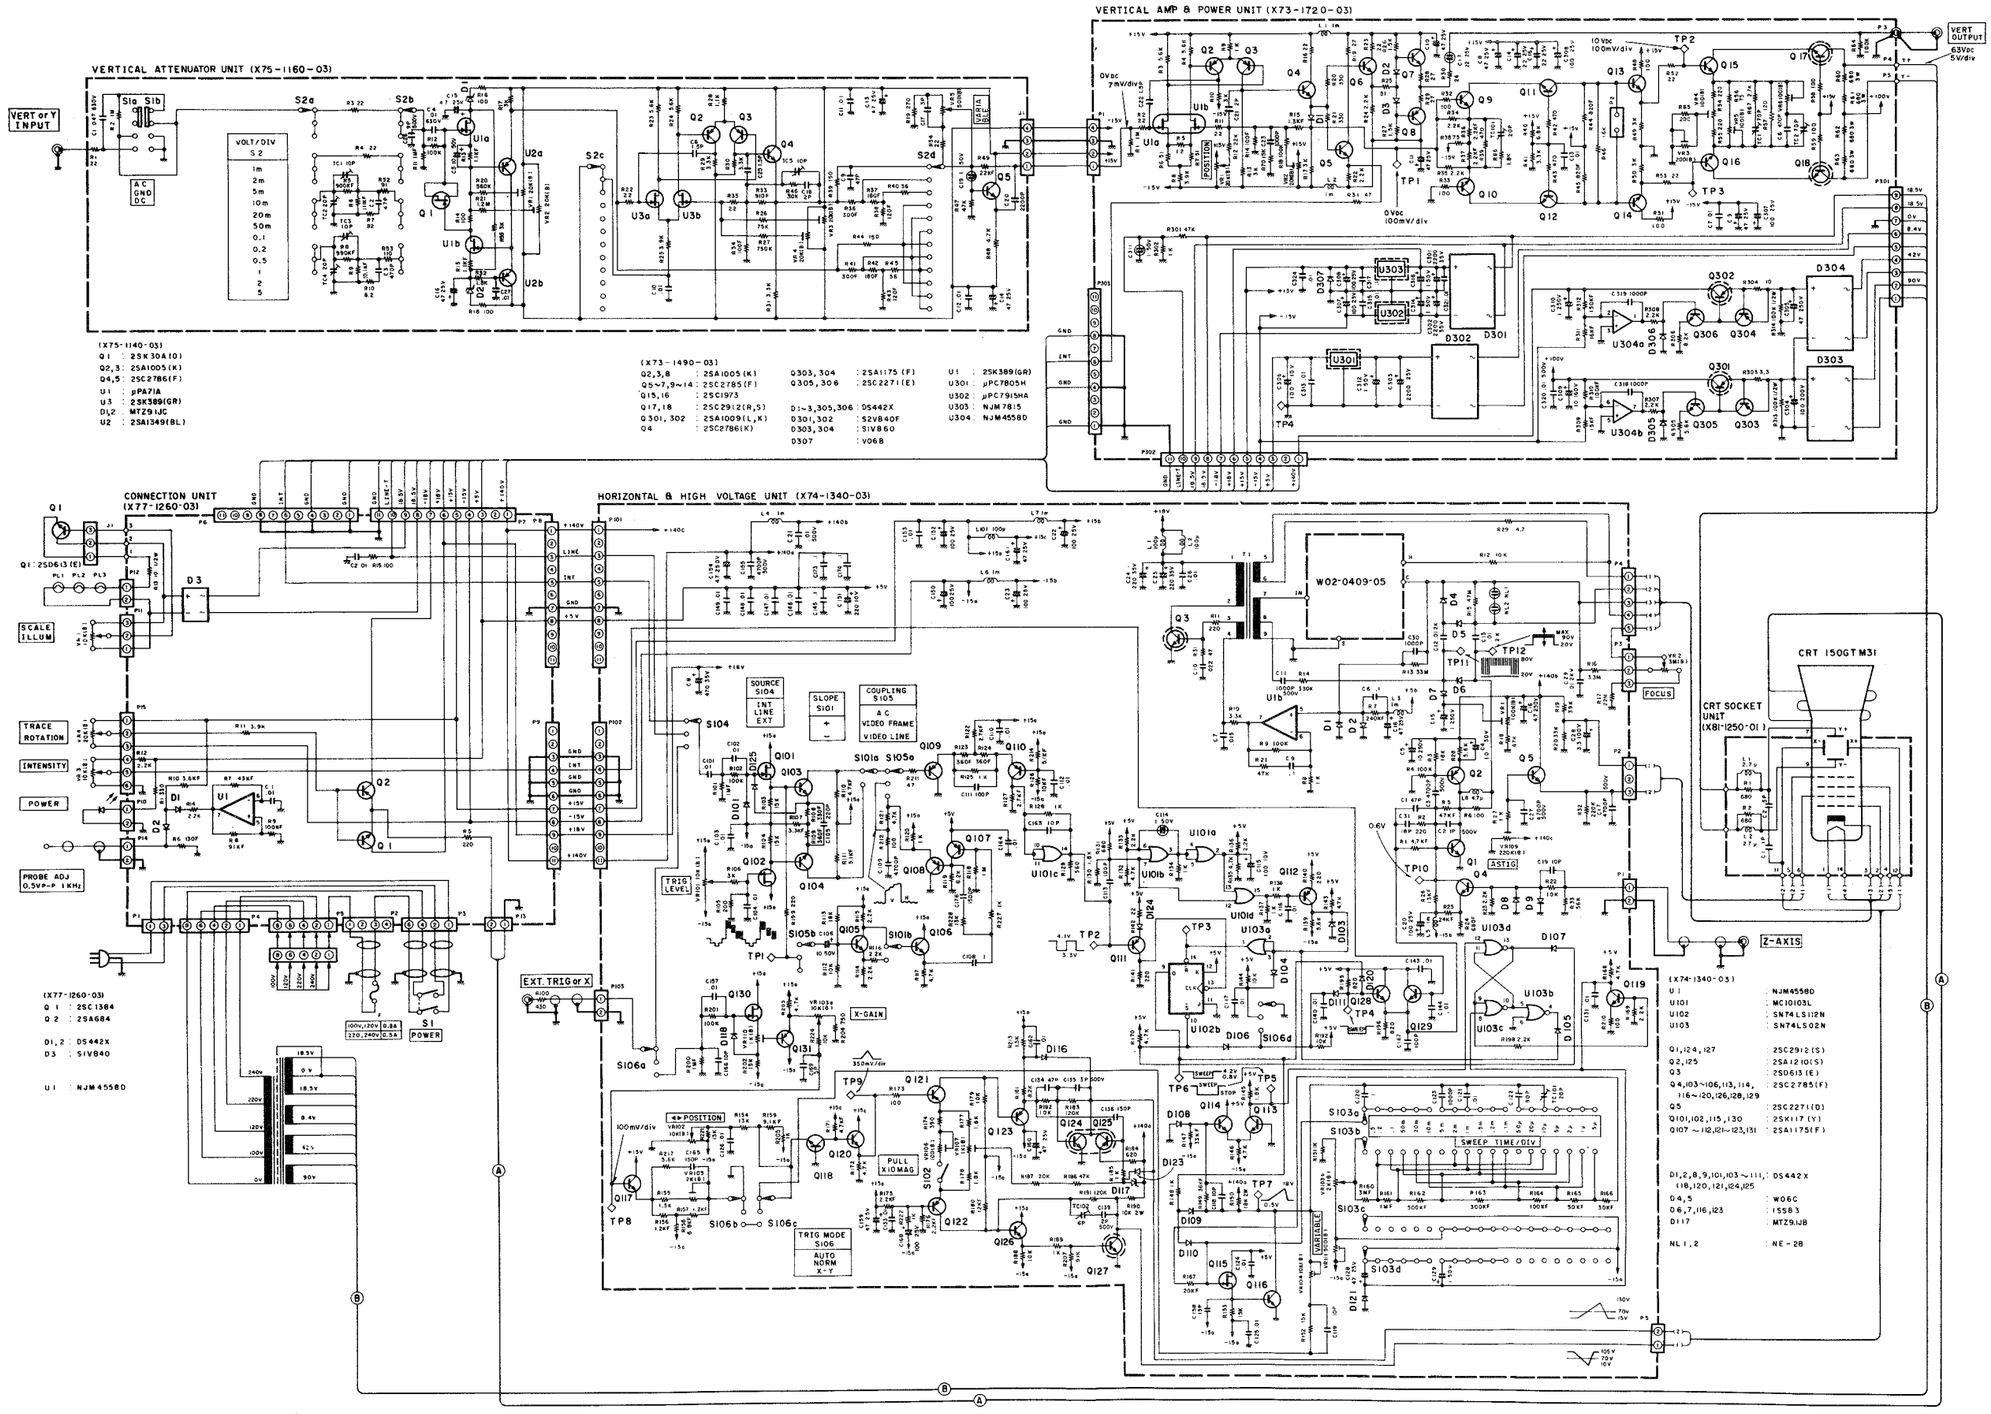


2SK389 (GR)



Pin No.	1	2	3	4	5	6	7
Name	D1	G1	S1	Sub	S2	G2	D2


2SA1349 (GR, BL)



Pin No.	1	2	3	4	5	6	7
Name	B1	C1	E1	Sub	E2	C2	B2


P.C. BOARD

VERTICAL AMP & POWER UNIT (X73-1720-00) (CS-1022)
(X73-1720-02) (CS-1012)
(X73-1720-03) (CS-1010)
(X73-1720-04) (CS-1021)

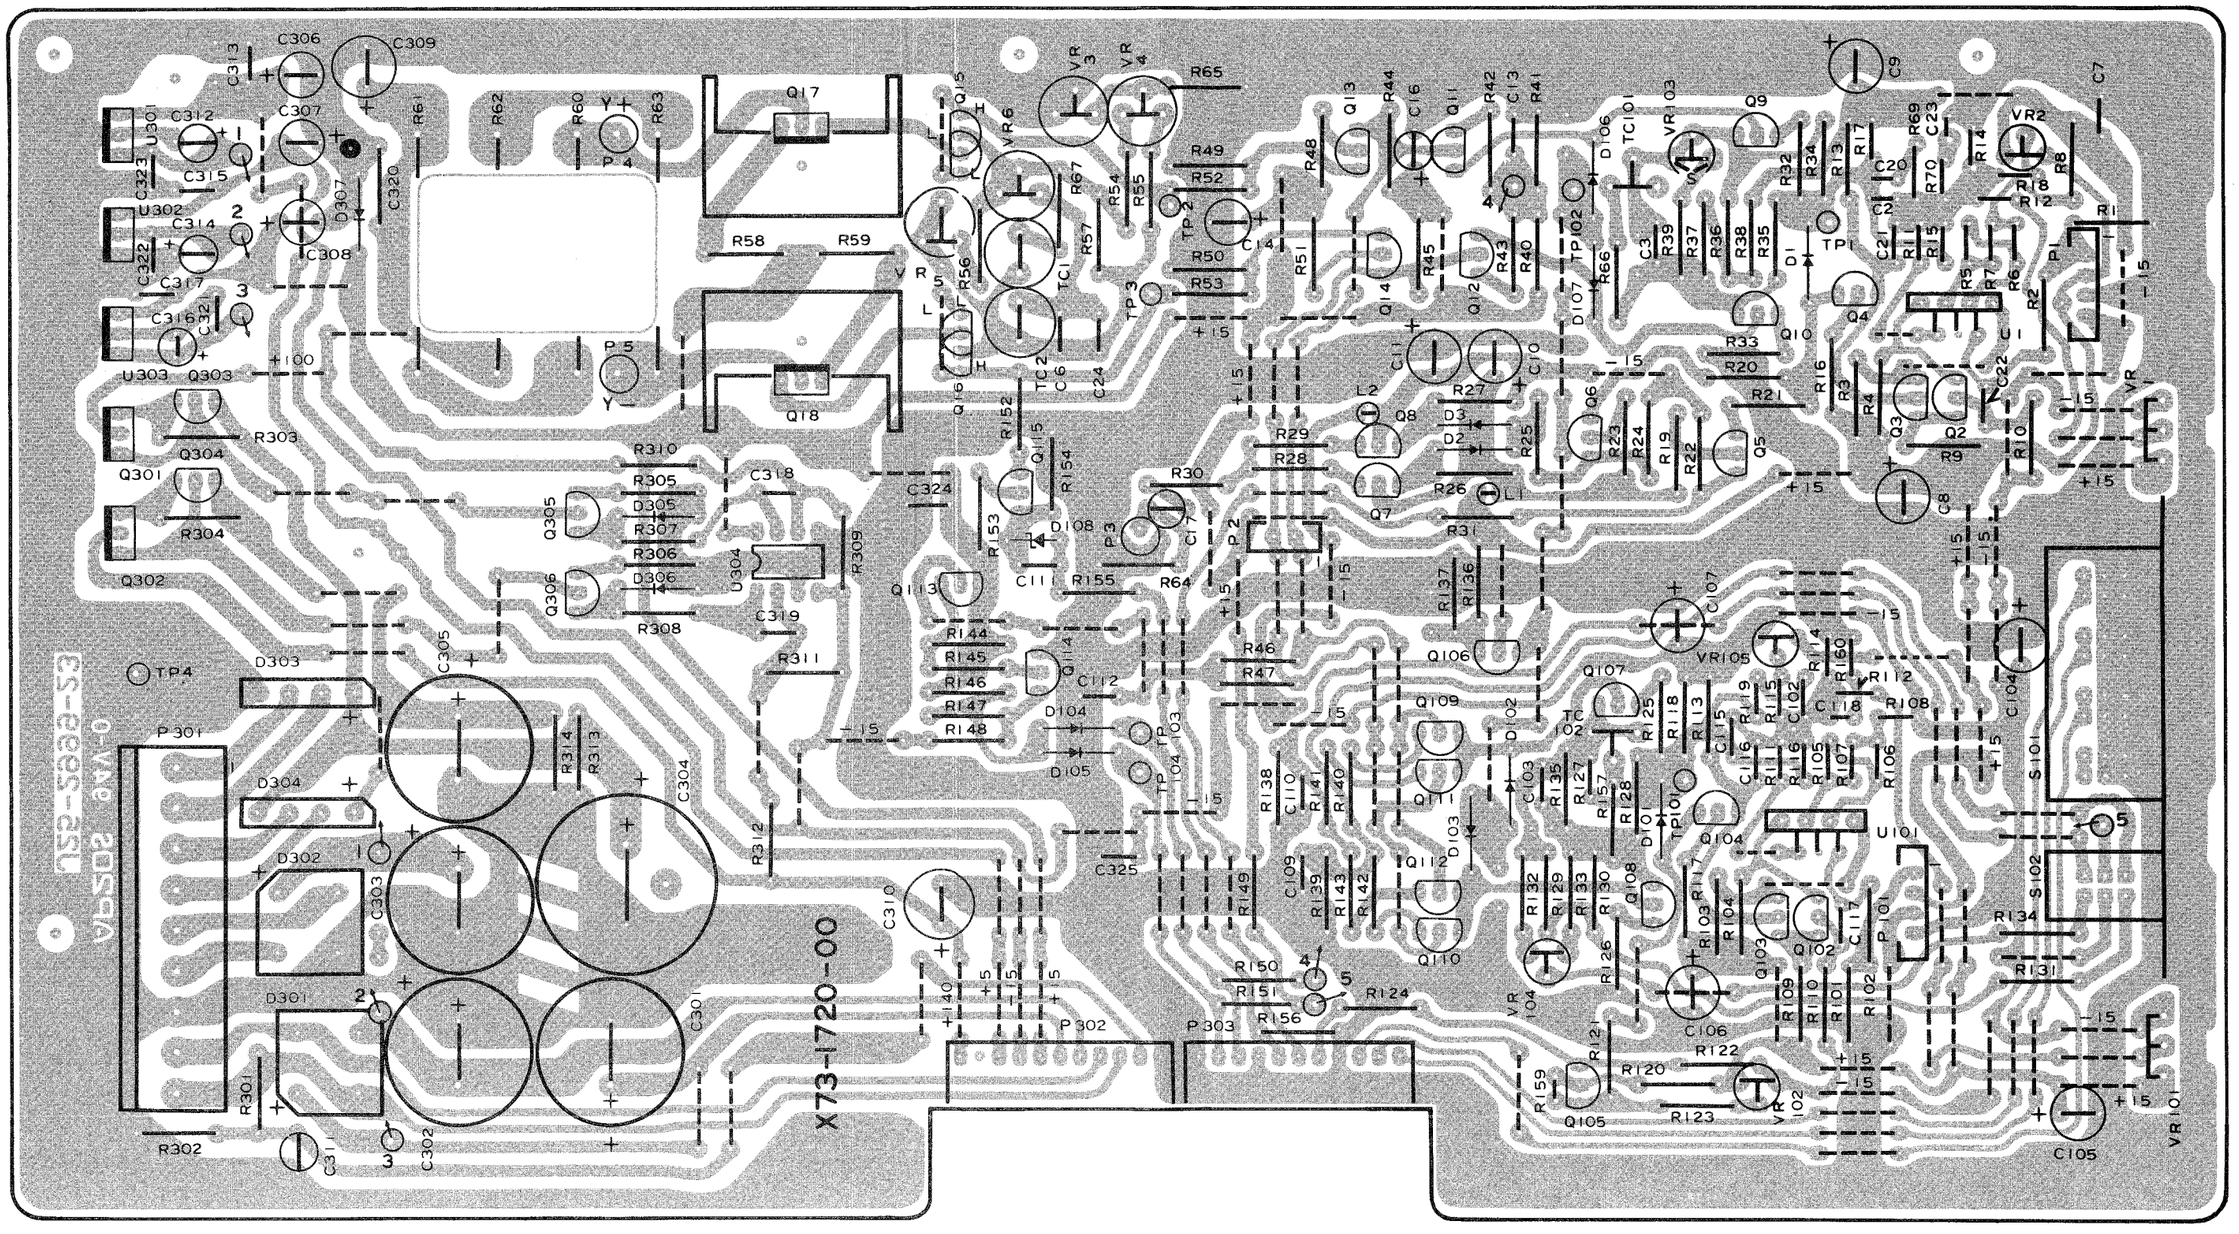

P.C. BOARD

VERTICAL ATTENUATOR UNIT (X75-1160-00) (CS-1022, 1021)
(X75-1160-02) (CS-1012)
(X75-1160-03) (CS-1010)

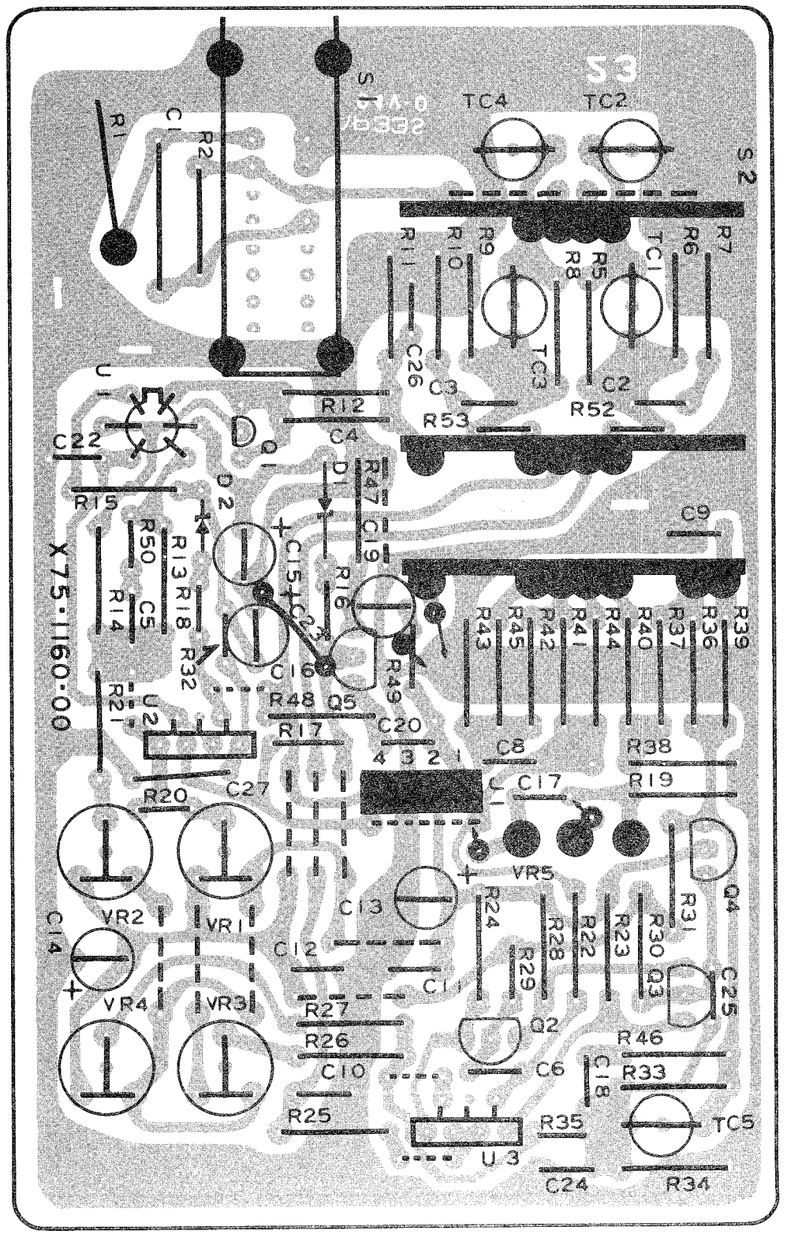

A product of
KENWOOD CORPORATION
17-5, 2-chome, Shibuya, Shibuya-ku, Tokyo 150, Japan

©PRINTED IN JAPAN B51-1059-00 (T)