


SPECIFICATIONS

Reverberation time	Effect 1 0-2.5 sec.
	Effect 2 30-80 msec.
Frequency response	 20 Hz-35 kHz, +0 dB, -0.5 dB
Harmonic distortion	 Less than 0.01% (20 Hz-20 kHz, output 1 V)
S/N ratio	 100 dB (Short-circuited IHF-A network)
Maximum output	 5 V (1 kHz, THD 0.05%, RL 47 kΩ)
Input impedance	 47 kΩ
Attenuation	 -6 dB at 1 kHz
Power consumption	 14 W
Dimensions	 440(W) x 57(H) x 150(D) mm
Weight	 2.0 kg (net)

Kenwood follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.


Kenwood poursuit une politique de progrès constants en ce qui concerne le développement. Pour cette raison, les spécifications sont sujettes à modifications sans préavis.

Kenwood strebt ständige Verbesserungen in der Entwicklung an. Daher bleiben Änderungen der technischen Daten jederzeit vorbehalten.

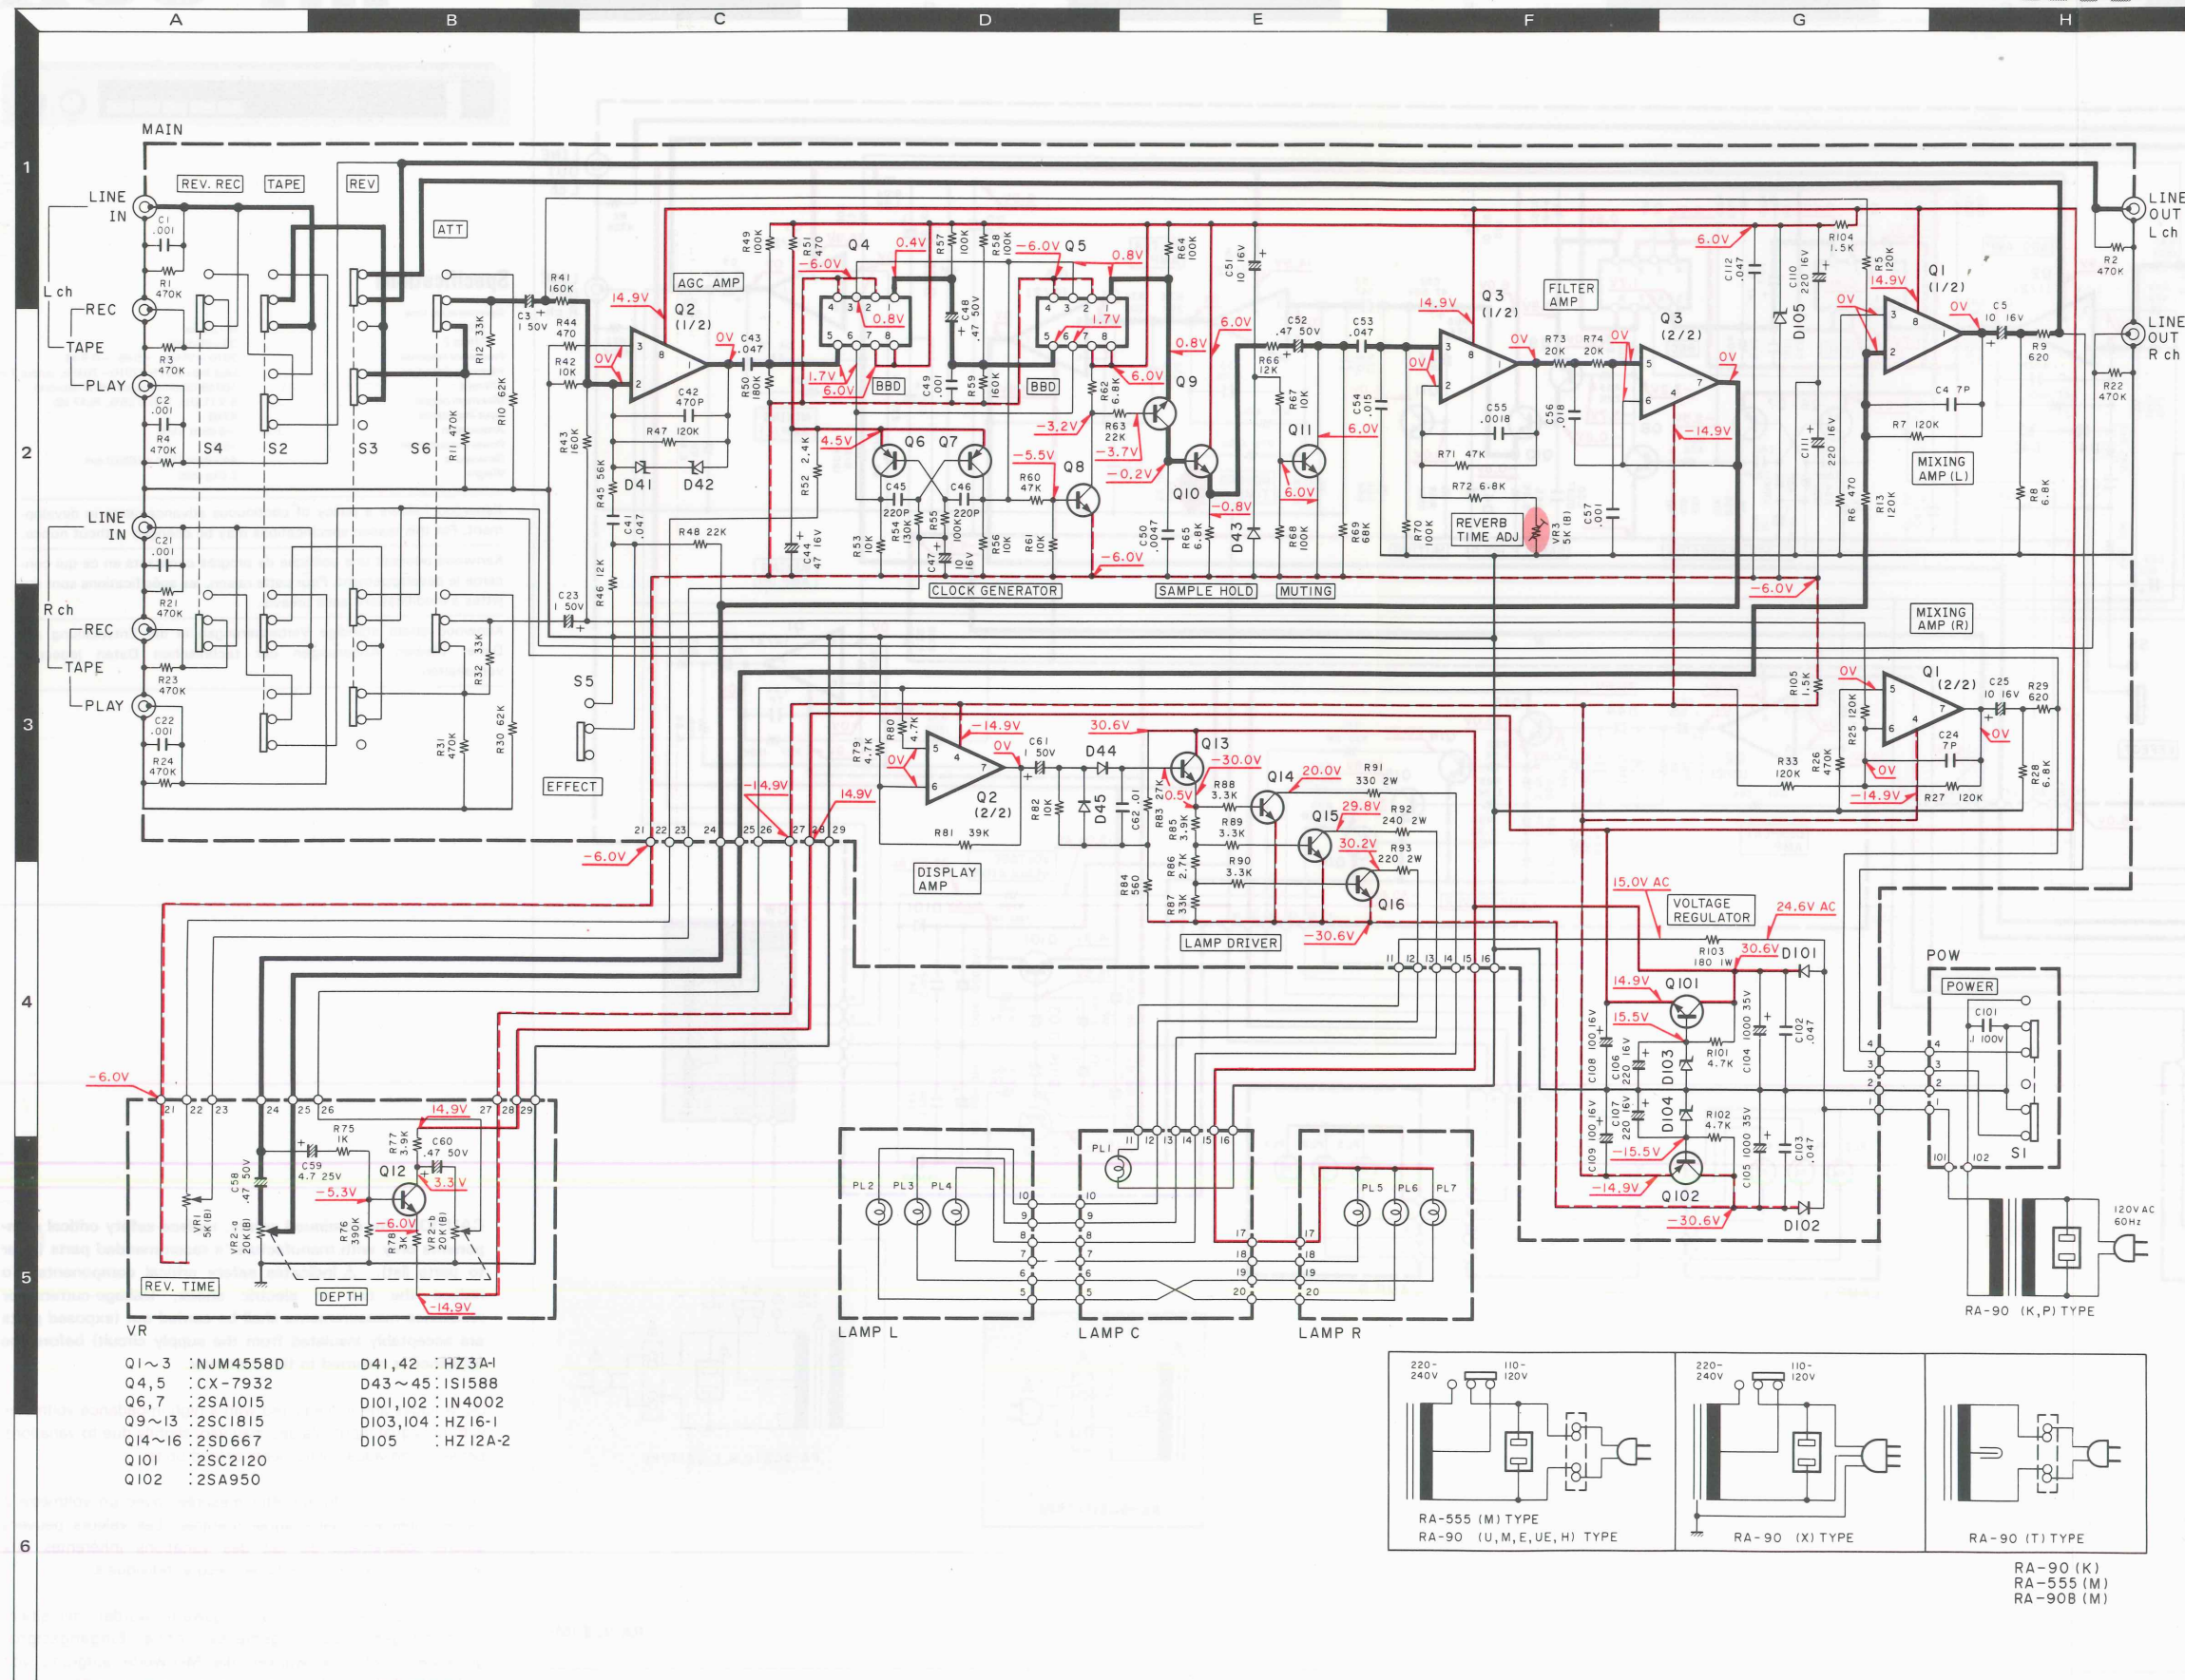


- DC voltages are measured by a VOM of 20 kΩ/V input impedance.
- Les tensions de courant continu sont mesurées par un multimètre d'une impédance d'entrée de 20 kΩ/V.
- Die Gleichstrom-Spannungen werden durch ein Vielfachmeßgerät von 20 kΩ/V Eingangs-Impedanz gemessen.

2SA950
2SA1015
2SC1815
2SC2120
2SD667



NJM4558D-X



CX-7932

