


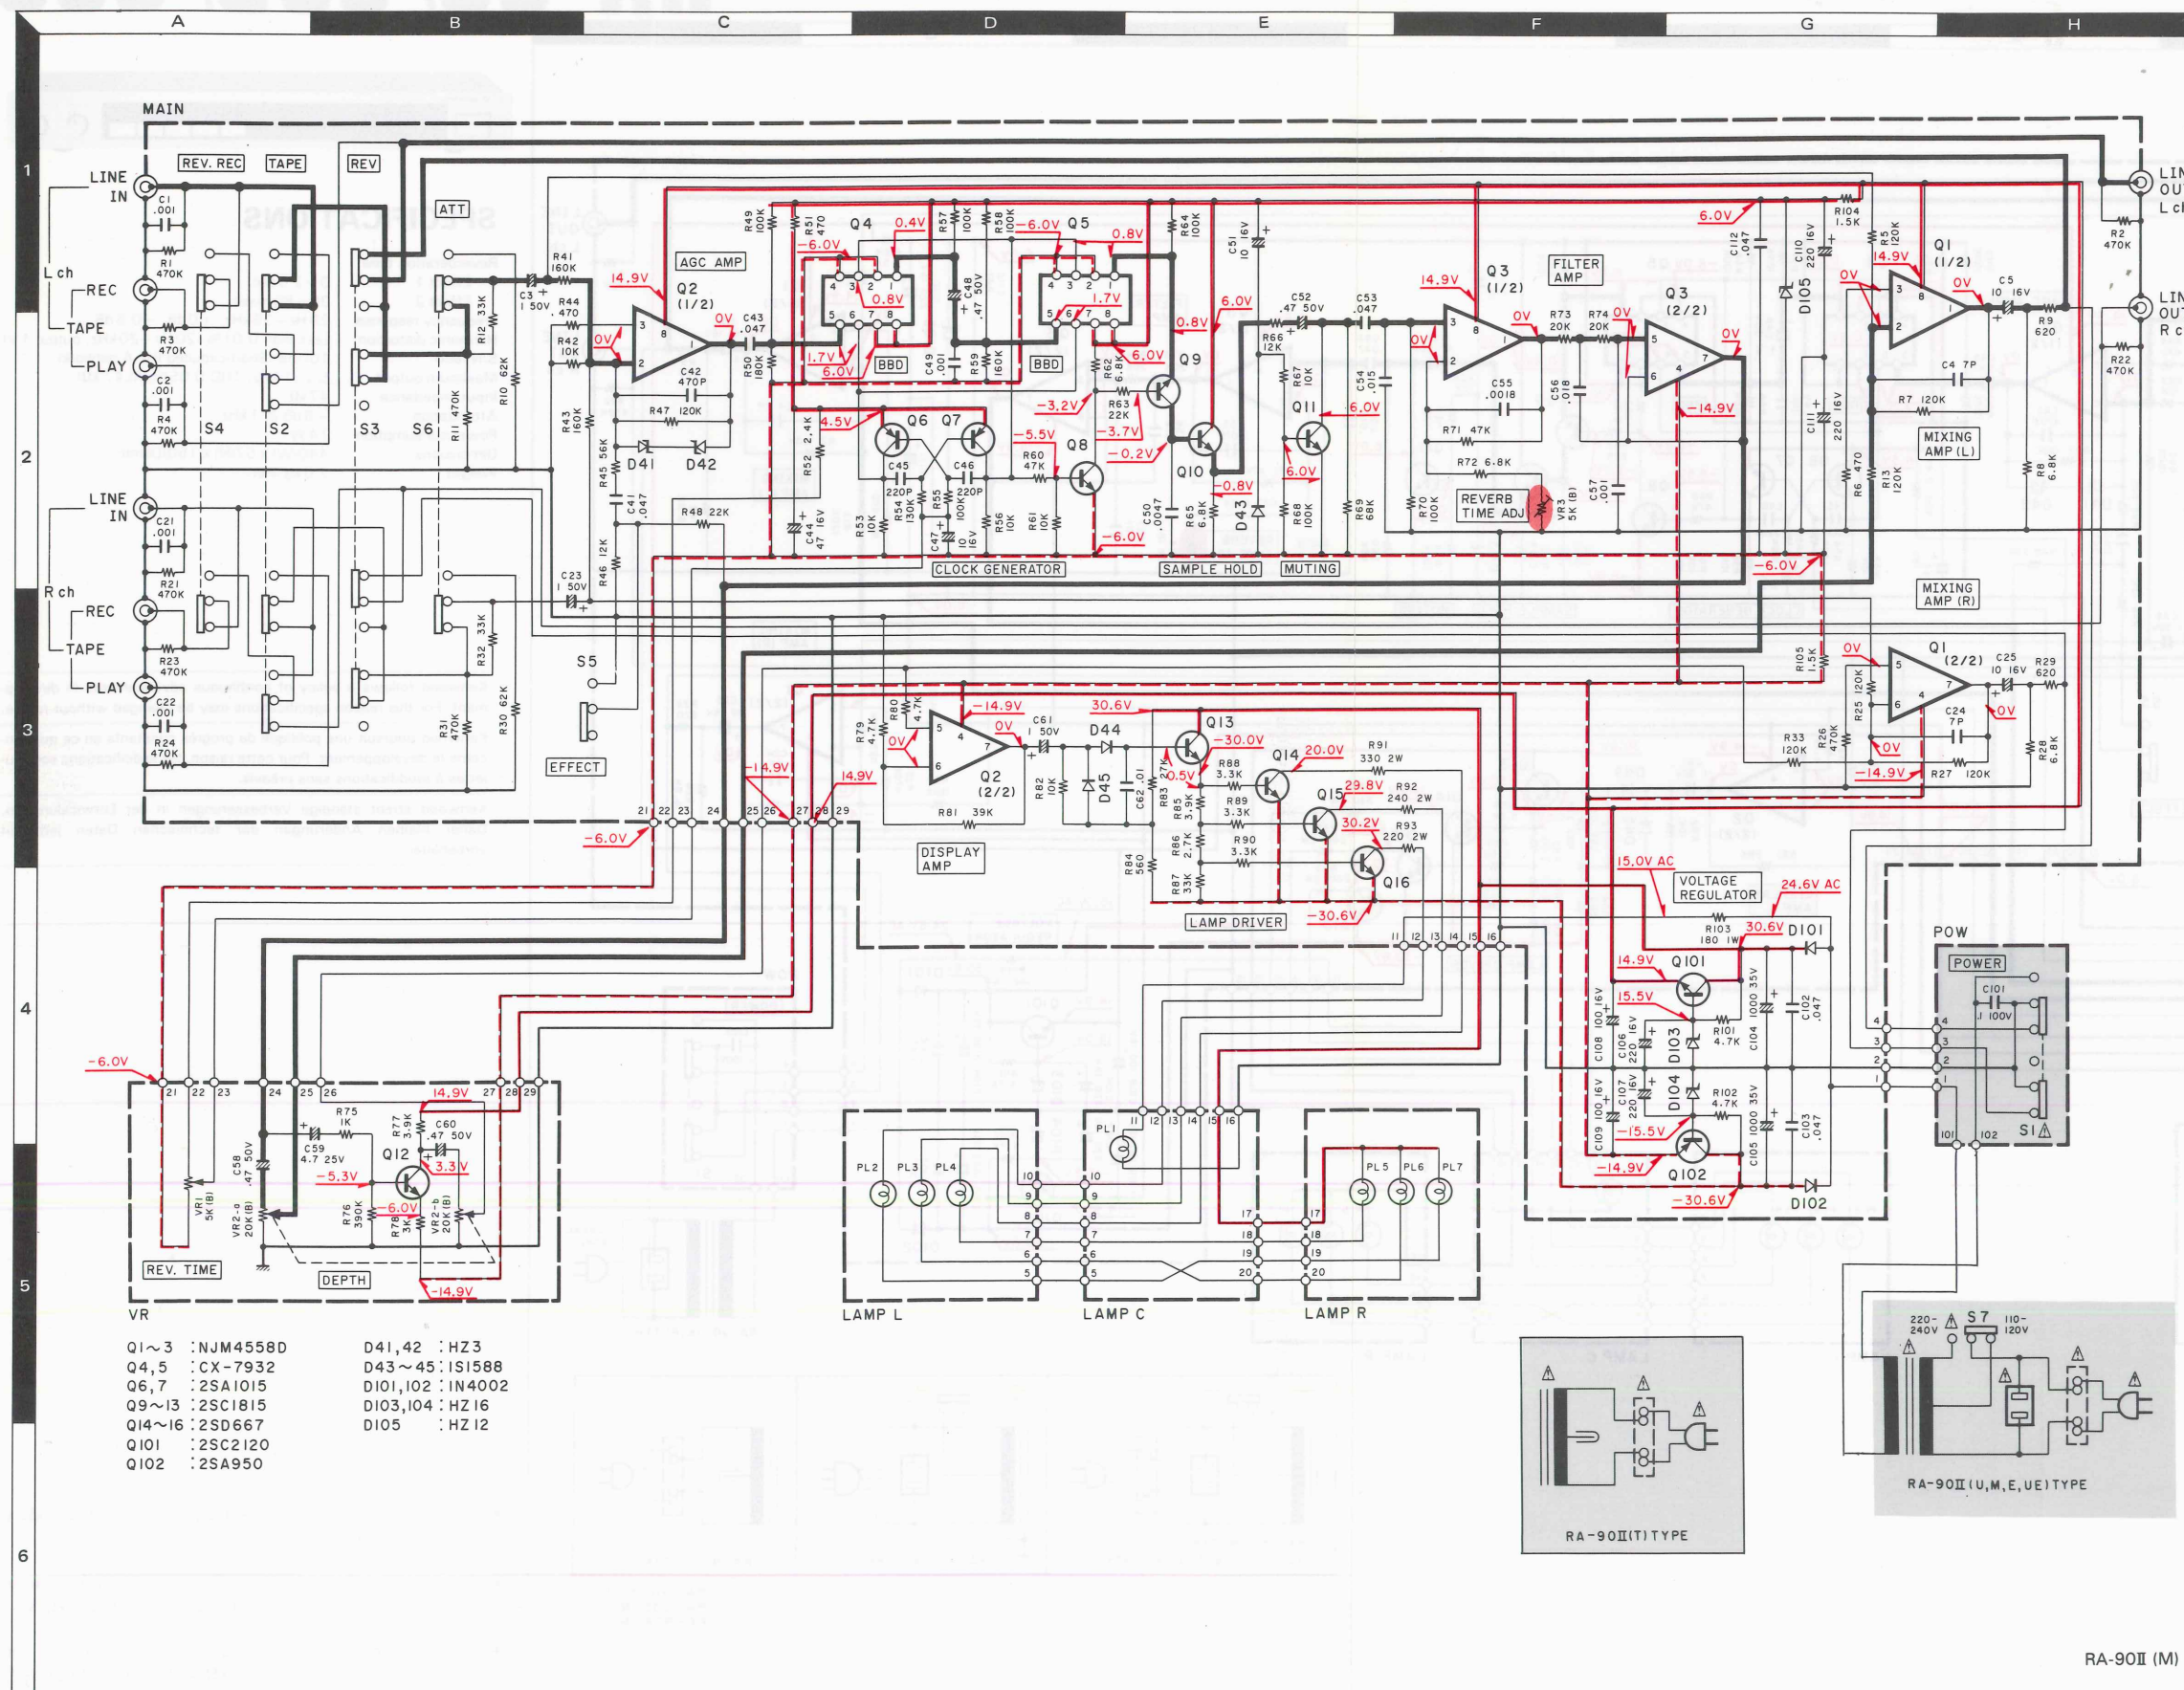



Specifications

Reverberation time	0-2.5 sec.
Effect 1	30-80 msec.
Effect 2	20 Hz-35 kHz, +0 dB, -0.5 dB
Frequency response	Less than 0.01% (20 Hz-20 kHz, output 1 V)
Harmonic distortion	100 dB (Short-circuited IHF-A network)
S/N ratio	5 V (1 kHz, THD 0.05%, RL47 k Ω)
Maximum output	47 k Ω
Input impedance	-6 dB at 1 kHz
Attenuation	15 W
Power consumption	440(W) x 57(H) x 168(D) mm
Dimensions	2.0 kg (net)
Weight	

Kenwood follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

Kenwood poursuit une politique de progrès constants en ce qui concerne le développement. Pour cette raison, les spécifications sont sujettes à modifications sans préavis.

Kenwood strebt ständige Verbesserungen in der Entwicklung an. Daher bleiben Änderungen der technischen Daten jederzeit vorbehalten.



RA-90II (M)

2SA950
2SA1015
2SC1815
2SC2120
2SD667

NJM4558D-X

CX-7932