


Capacitors - decimal values in MF all others in MMF unless otherwise specified, Voltages - measured from point indicated to B- with a VTVM.

# Red & Tweed 27F1 Two Tone Blue

MODELS



PARTS LOCATIONS

### To Ramove Chassis from Cabinet

- Pull off two knobs from front of cabinet.
- Remove screws which mount baffle and remove baffle. 3. Remove four screws from corners of phono mounting board.
- 4. Remove mounting board from cabinet.

50C5

PWR AMP

Remove two screws which hold chassis to mounting board and remove chassis.

108v

94V

El **3.2**Ω

BRN

RED

#### MOTOROLA INC


MODEL 37F1 Gray & Pink 37F2 Green & Black

> CHASSIS HS-541

12AV6 **VOLTAGE AMP** 

8

**R**3



## To Remove Chassis from Cabinet


- Remove perforated baffle board by removing three screws which hold the board in place.
- 2. Remove four screws located at the corners of the record changer mounting board.
- 3. Grasp record changer mounting board and lift record changer out of cabinet.
- 4. Pull off two control knobs from front of cabinet.
- 5. Remove two nuts which mount the chassis to the cabinet and remove the chassis.

### NOTES:

Capacitors - Decimal Values in MF, all others in MMF unless otherwise specified.

Voltages measured to B- with VTVM. Tol. + 10%

→=B- - L=Chassis

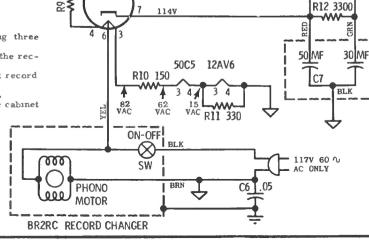

35W4 RECT