






# Motorola AUTO Radio

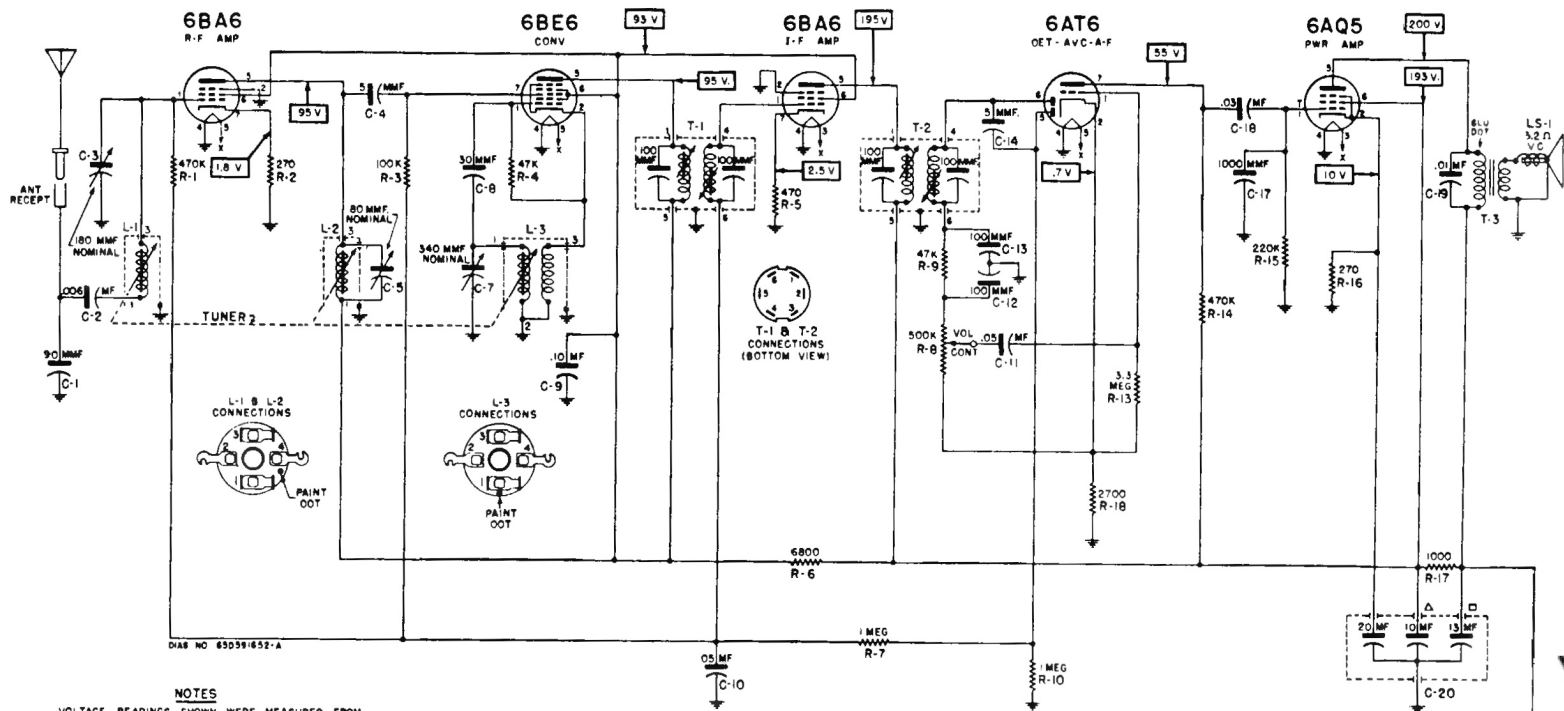

## NOTES

VOLTAGE READINGS SHOWN WERE MEASURED FROM POINT INDICATED TO CHASSIS WITH A VTVM. NO SIGNAL WAS TUNED IN. INPUT VOLTAGE WAS 6.3V DC AT BAT RECEPTACLE. VOLTAGE TOLERANCE  $\pm 10\%$ . ALL RESISTORS INDICATED IN OHMS. K-ONE THOUSAND (1000) OHMS.

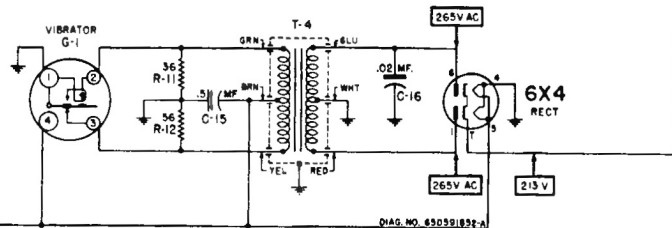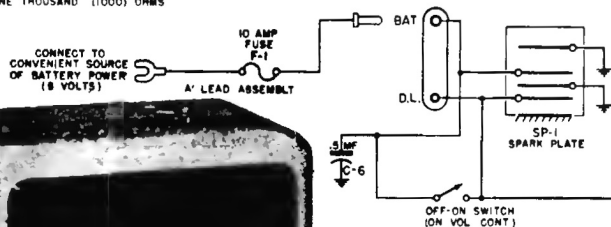

Compact automotive type superheterodyne receiver with self-contained speaker. Receiver is designed for installation in any car when used with appropriate Motorola control head.

I-F = 455 KC

FREQUENCY RANGE - 535 TO 1600 KC

MODEL  
500

