


TO REMOVE CHASSIS FROM CABINET

1. Remove amplifier control knobs.
2. Remove the screws at the corners of the record changer mounting board.
3. Grasp record changer base and tilt up front of mounting board. Disconnect leads from changer.
4. Completely remove record changer and mounting board.
5. Disconnect speaker leads.
6. Remove the screws that mount the amplifier chassis to the cabinet and remove chassis from cabinet.

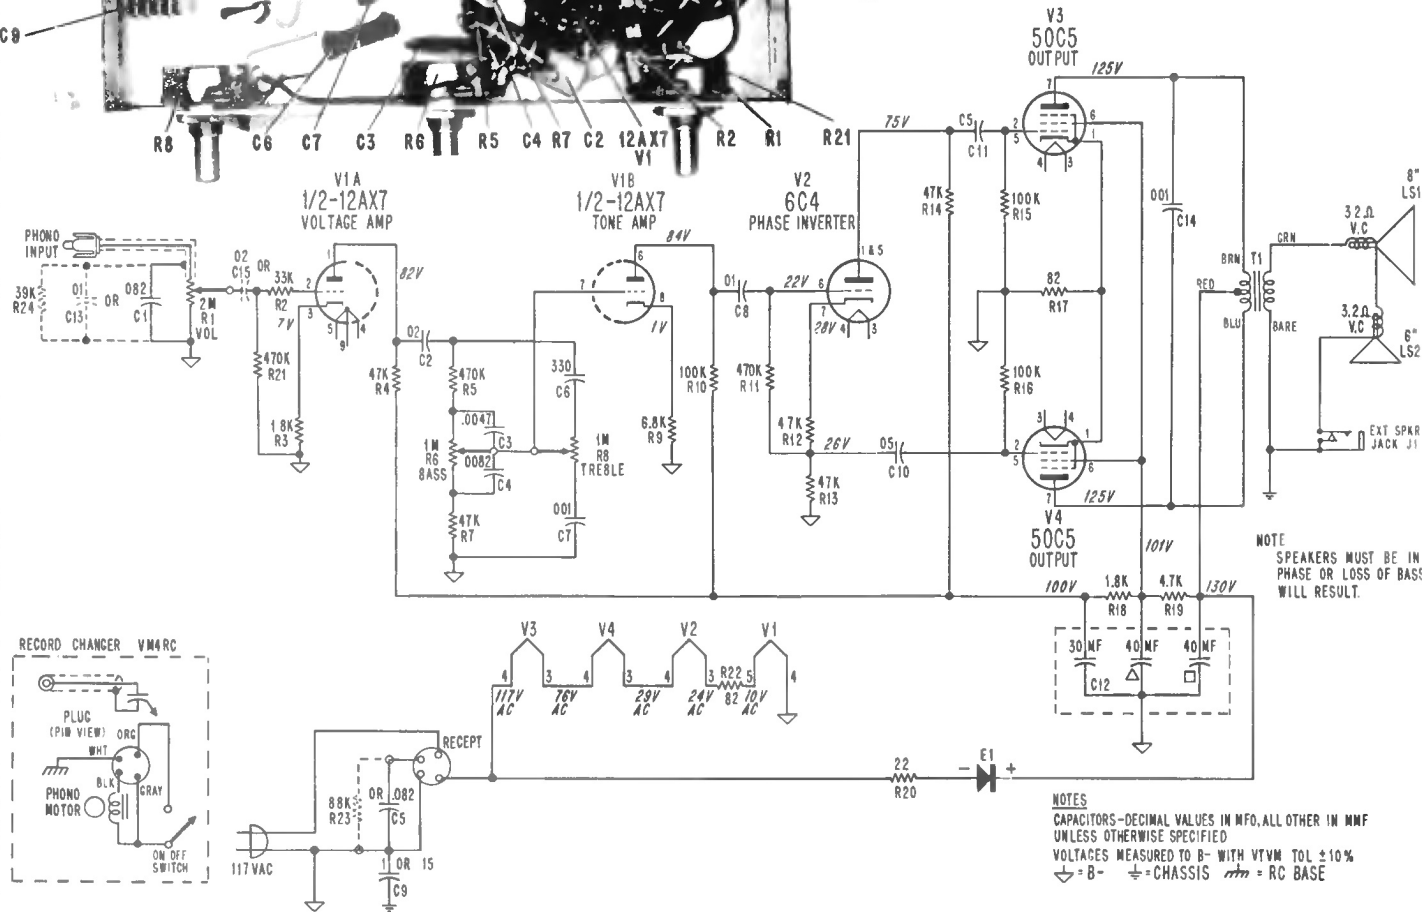

Motorola

MODELS
54HF1
54HF1B
CHASSIS
HS-443