

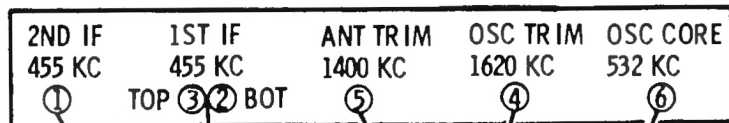


MOTOROLA

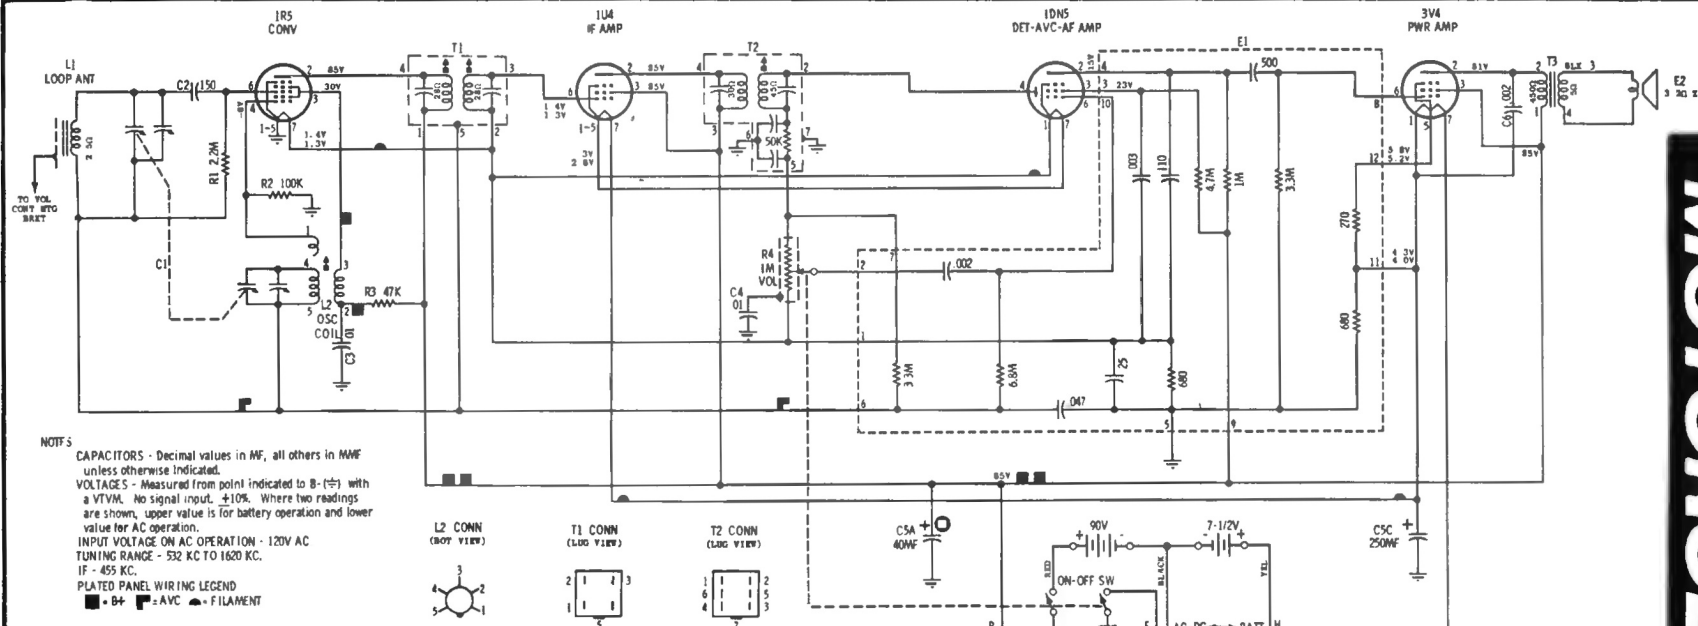

SPEAKER LEADS

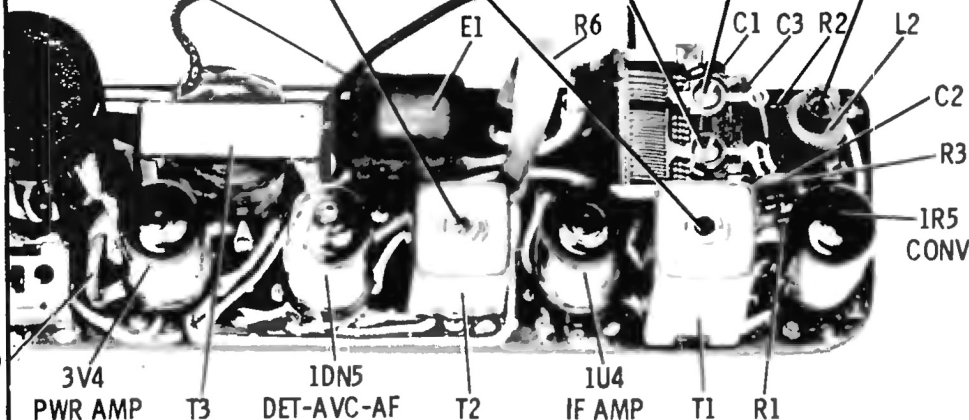

ALIGNMENT ADJUSTMENTS & PARTS LOCATIONS

MODELS
5P21B
5P21N
5P21R

CHASSIS
HS-633
HS-633
HS-633

TO REMOVE CHASSIS FROM CABINET

1. Pull the control knobs from front of radio.
2. Remove the volume control mounting palnut and the machine screws under tuning knob of radio.
3. Unsolder speaker leads.
4. Unsolder antenna leads.
5. Remove chassis from cabinet.