



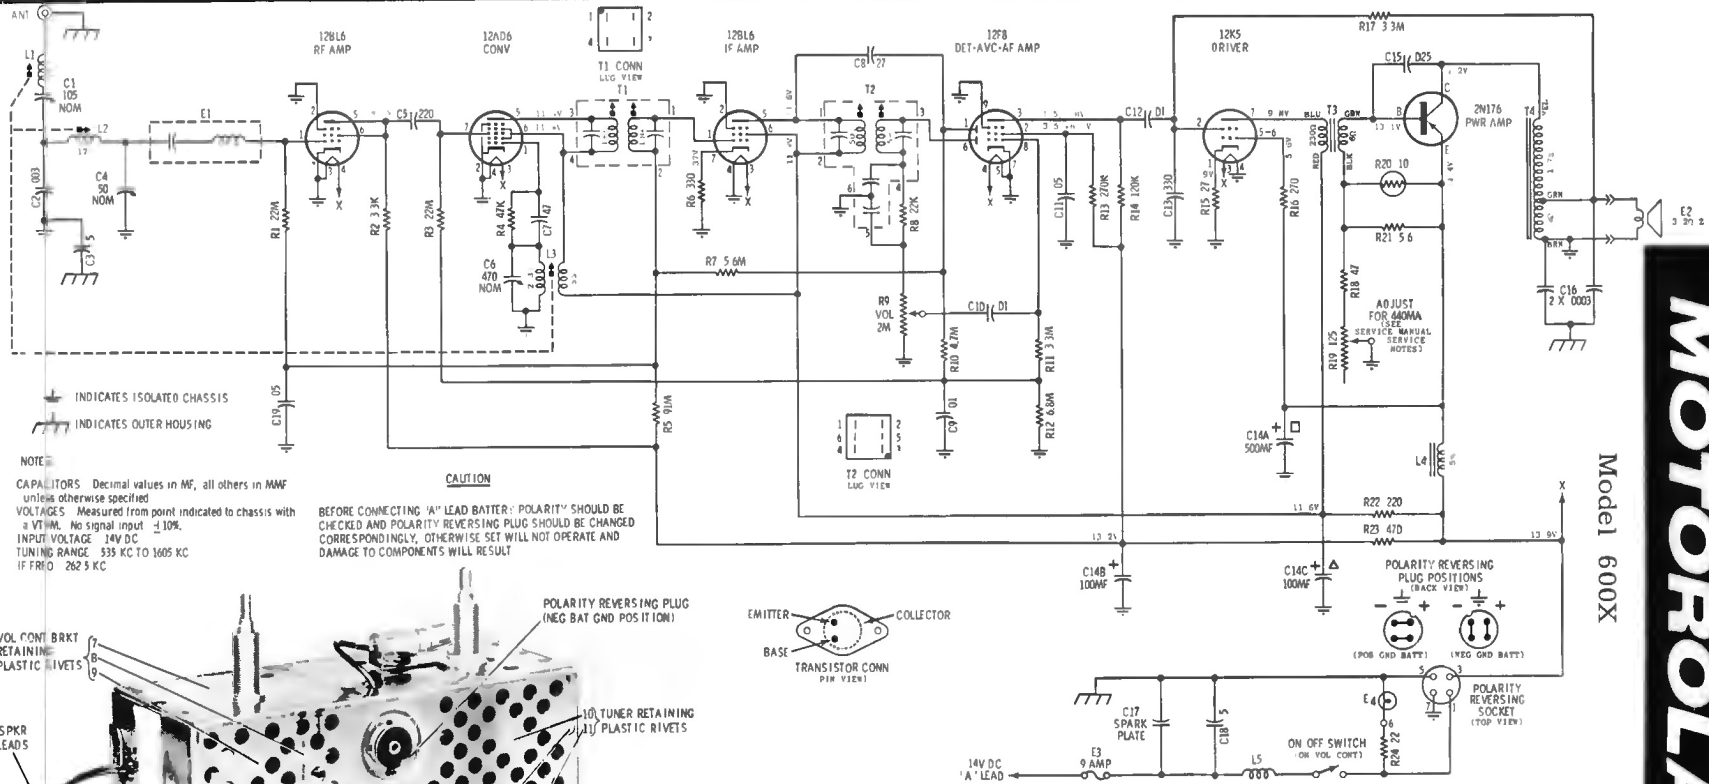


MOTOROLA

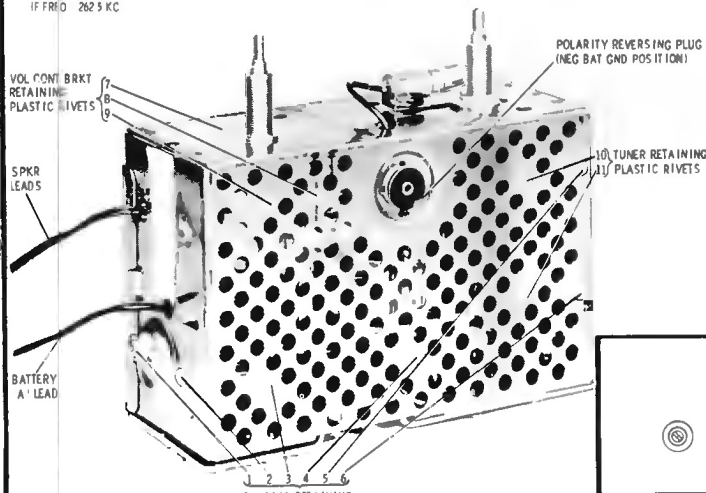

CHASSIS REMOVAL

- Remove cover and back plate.
- Remove chassis retainer plastic rivets 1, 2, 3, 4, 5 and 6 (see photo) by carefully pushing out center pin and then remove plastic rivet.
- Unsolder chassis leads to Polarity Reversing Socket.
- Unsolder chassis leads to mica capacitor (C16).
- Unsolder chassis leads going to antenna receptacle and volume control.
- Unsolder chassis leads to tuner.
- Remove chassis.

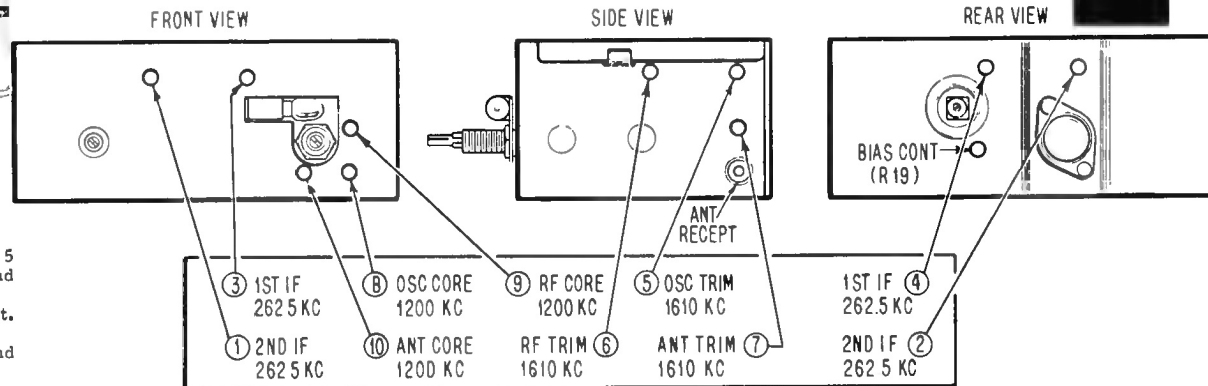

ALIGNMENT ADJUSTMENTS