
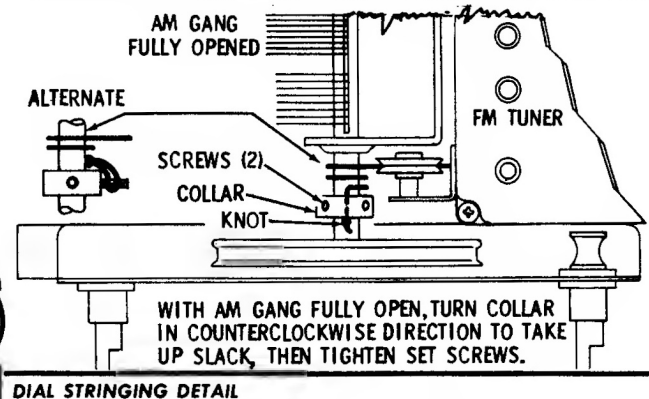
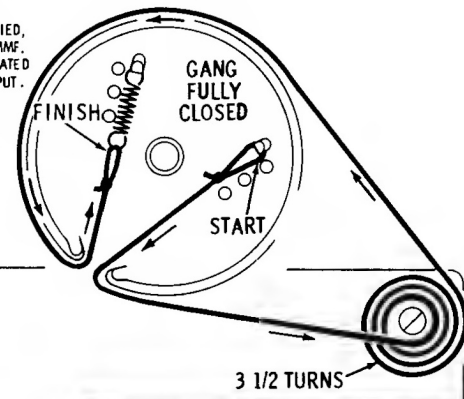



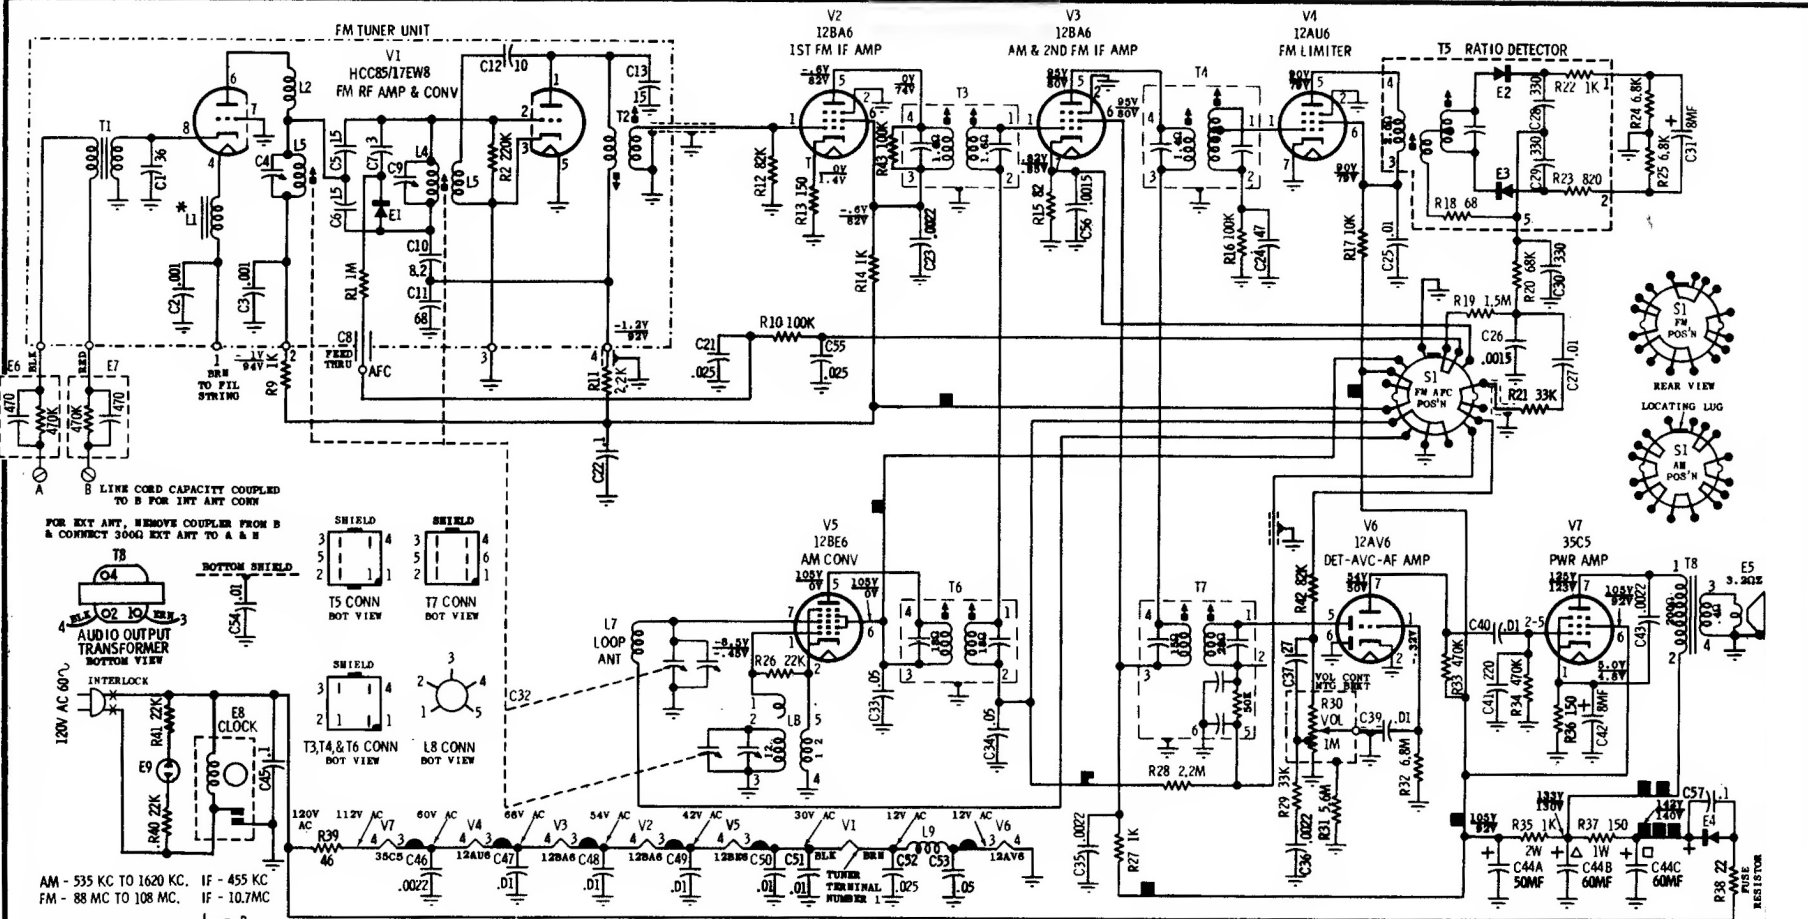

MOTOROLA

MODELS BC2, BC3

CHASSIS HS-4124

Models BC2, BC3, Chassis HS-4124

1. Remove control knobs - pull straight off.
2. Remove 4 clutch head screws holding cabinet back to cabinet.
3. Unsolder leads to cabinet back.
4. Remove two screws holding chassis support channel.
5. Remove two screws that mount the AM gang bracket to cabinet.
6. Remove dial crystal from cabinet - reach in back of set and push down plastic tabs with fingers. Crystal should slip forward at top. Bottom of crystal has tabs which fit into cabinet slots. Care should be taken to avoid damage to tabs.

PLATED CHASSIS BOARD WIRING AS VIEWED FROM BOTTOM
(COMPONENTS SHOWN ARE LOCATED ON OPPOSITE SIDE)

