


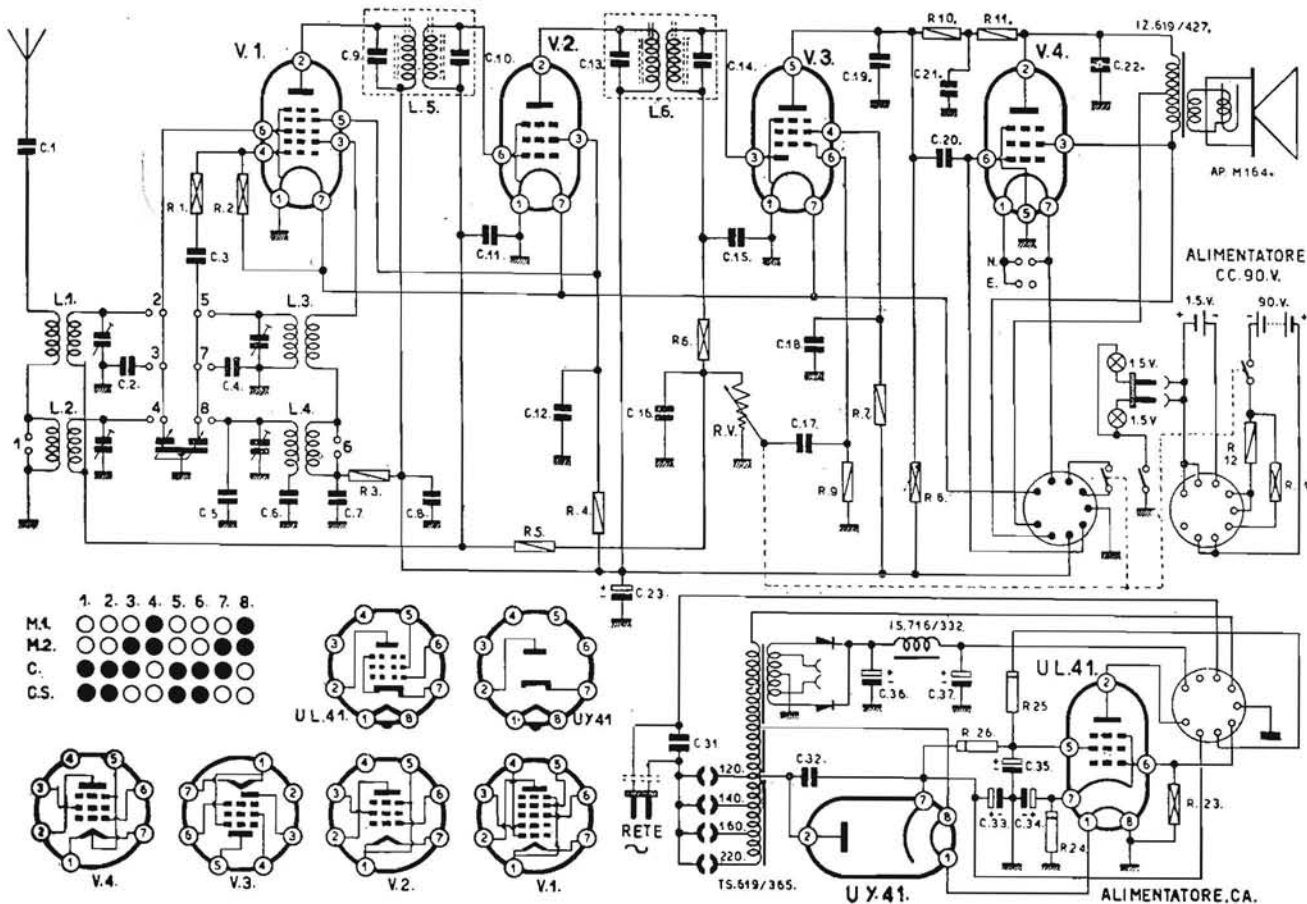

PHONOLA (S. A. FIMI) - Mod. 425. Apparecchio portatile, alimentabile anche con rete-luce a corrente alternata. Onde medie e onde corte divise in due semigamme. MF a 470 kc/s. Anodica 90 V, schermo 55 V, accensione 1,5 V. Potenza 0,23 W con pile; 1,1 W con rete-luce. Consumo 20 watt.

C 1	3000 pF	1500 VP	carla
C 2	200	1000	eg.
C 3	100		
C 4	195		
C 5	15		
C 6	425		
C 7	50.000	1500	carla
C 8	50.000		
C 9	200	1000	eg.
C 10	200		
C 11	25.000	1500	carla
C 12	50.000		
C 13	200	1000	eg.
C 14	200		
C 15	100		
C 16	100		
C 17	2000	1500	carla
C 18	50.000		
C 19	100	1000	eg.
C 20	2000	1500	carla
C 21	200	1000	eg.
C 22	1000	1500	carla
C 23	40 uF	180 VL	Eletr.

R 1	100 Ω	± 10	1/4
R 2	47 K Ω		
R 3	22 K Ω		1/2
R 4	22 K Ω		
R 5	2,2 M Ω		
R 6	47 K Ω		
R 7	3,3 M Ω		
R 8	0,47 M Ω		1/4
R 9	10 M Ω		1/2
R 10	3,3 M Ω		
R 11	1 M Ω		
R 12	470 Ω		
R 13	1 M Ω		1/4

RV	0,5 M Ω log. con interr.	R 5459/E
----	--------------------------	----------

Eventuale alimentazione CA.			
R 23	0,5 M Ω	± 10	1/4
R 24	140 Ω	± 5	
R 25	1250 Ω	± 10	
R 26	1000 Ω		

C 31	3000 pF	-10+25	3000 V
C 32	25.000		1500 V
C 33	32 uF	-10+70	180 V
C 34	2		25 VL
C 35	32		180 VL
C 36	2500		10 VL
C 37	2500		10 VL