



# RCA VICTOR

AC-DC Radio Receiver

## Models 2X61, 2X62

Chassis No. RC-1080C RC-1080D

### ALIGNMENT PROCEDURE


**Cathode Ray Alignment** is the preferable method. Connections for the oscilloscope are shown on the schematic diagram.

**Output Meter Alignment**—If this method is used, connect the meter across the voice coil and turn the receiver volume control to maximum.


**Test Oscillator**—Connect low side of test oscillator to common wiring in series with a .1 mf. capacitor. If the test oscillator is a.c. operated it may be necessary to use an isolation transformer for the receiver during alignment and the low side of the test oscillator connected directly to common wiring at the electrolytic capacitor. Keep the oscillator output low to prevent a-v-c action.

Step	Connect high side of sig. gen. to—	Sig. gen. output	Turn radio dial to—	Adjust for peak output
1	Pin No. 4 of 12SK7 tube	455 kc	Quiet point near 600 kc	Top and bottom cores of T2
2	Pin No. 8 of 12SA7 tube			Top and bottom cores of T1
3	"External Antenna" terminal through 100 mmf. capacitor	1620 kc	1620 kc	C6 Osc. C5 R.F. C4 Ani.
4		1400 kc		Shunt C5 with 22,000 ohm resistor  L4 Osc. (Rock gang)
		600 kc	600 kc	
		Remove 22,000 ohm resistor from C5		
5		600 kc	600 kc	L2 R.F.
6	Repeat steps 3, 4 and 5			

The position of the loop antenna in relation to the chassis affects adjustment of C4. The correct position is indicated on the illustration "Tube and Trimmer Locations."

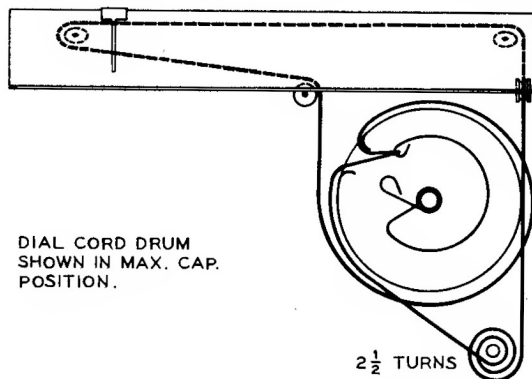

Dial Indicator and Drive Mechanism

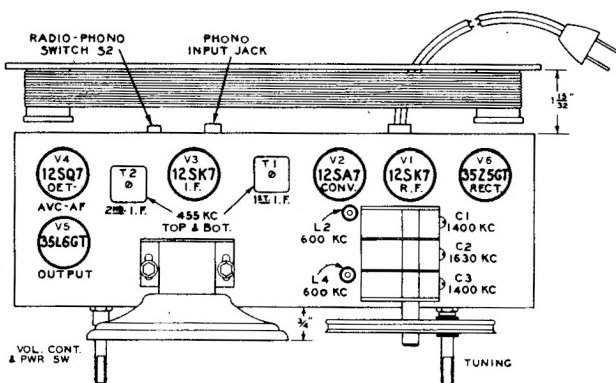

Tube and Trimmer Locations

**NOTE**—If reception is not obtained on d. c. operation, reverse plug in outlet receptacle. On a. c. operation this may reduce hum.

The position of the speaker is adjustable; the correct position is indicated on the illustration "Tube and Trimmer Locations."

