




RCA

Model RZA 215

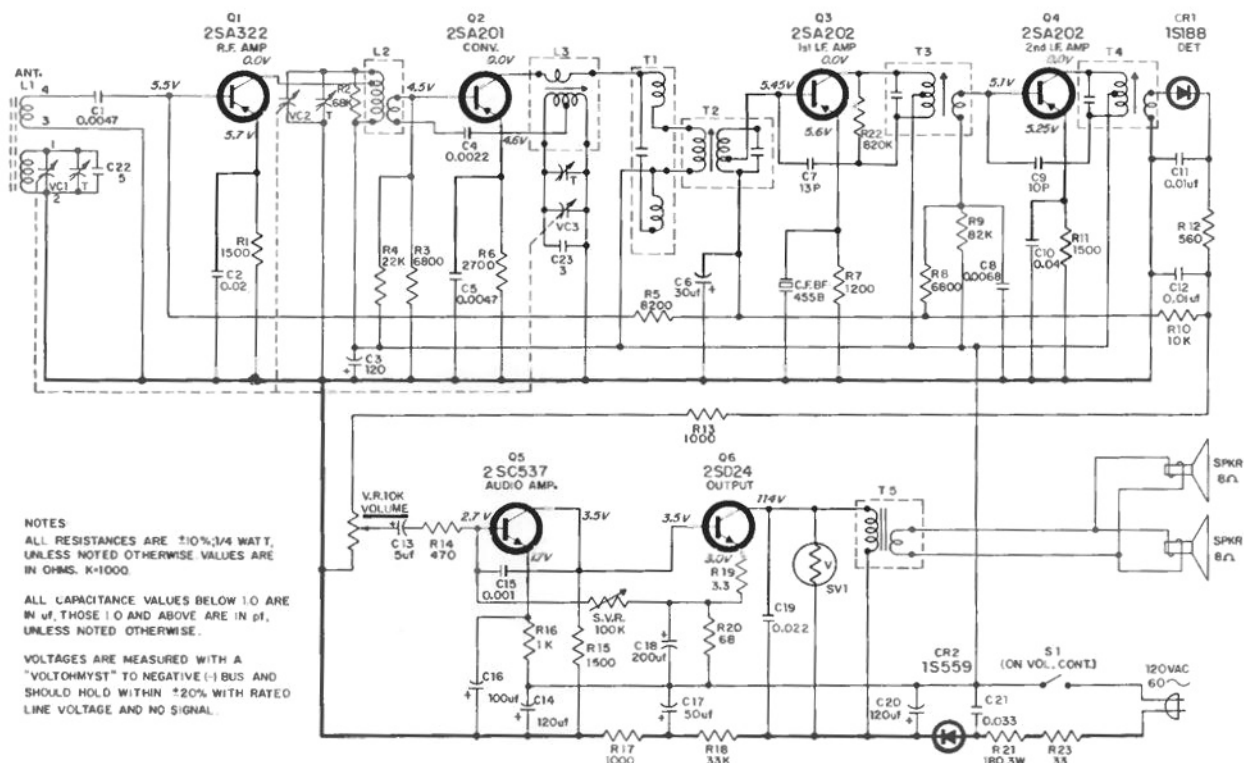

Step	Instrument Connections	Set Signal	Set Dial	Adjust for Max.
1	RF Generator to loop or short piece of wire near antenna. Output meter across speaker voice coil.	455 kc (Modulated)	Gang Open	T3, T2, T1 (IF's)
2		520 kc (Modulated)	Gang Closed	L3 (Osc. Coil)
3		1650 kc (Modulated)	Gang Open	VC3-T (Osc. Trim)
4		600 kc	600 kc	L2 (RF Coil)
5		1400 kc (Modulated)	1400 kc (Rock Gang)	VC1-T (Ant. Trim)
6				VC2-T (RF Trim)
7	Repeat above as necessary to obtain maximum sensitivity and selectivity.			

2 1/2 TURNS

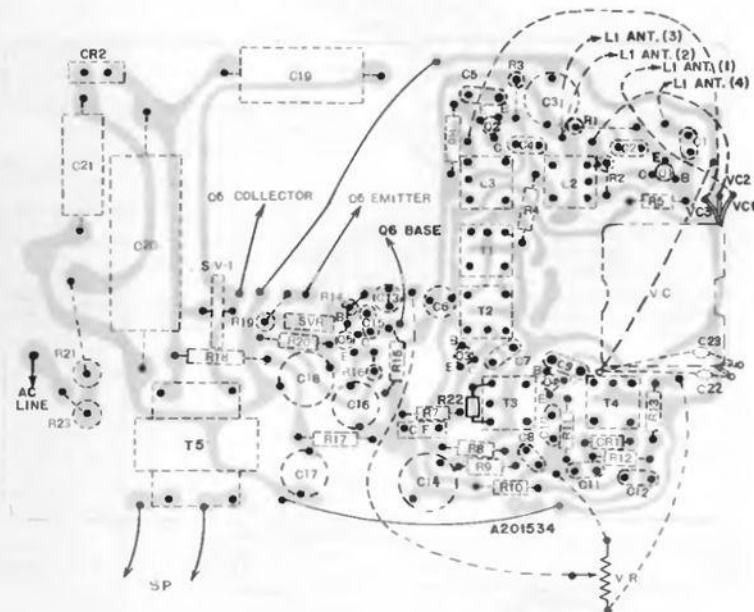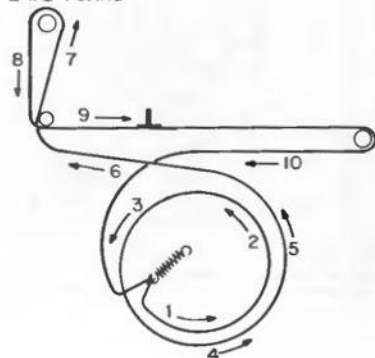

Component Location (Wiring View)