



AM IF 455 KC
FM IF 10.7 MC

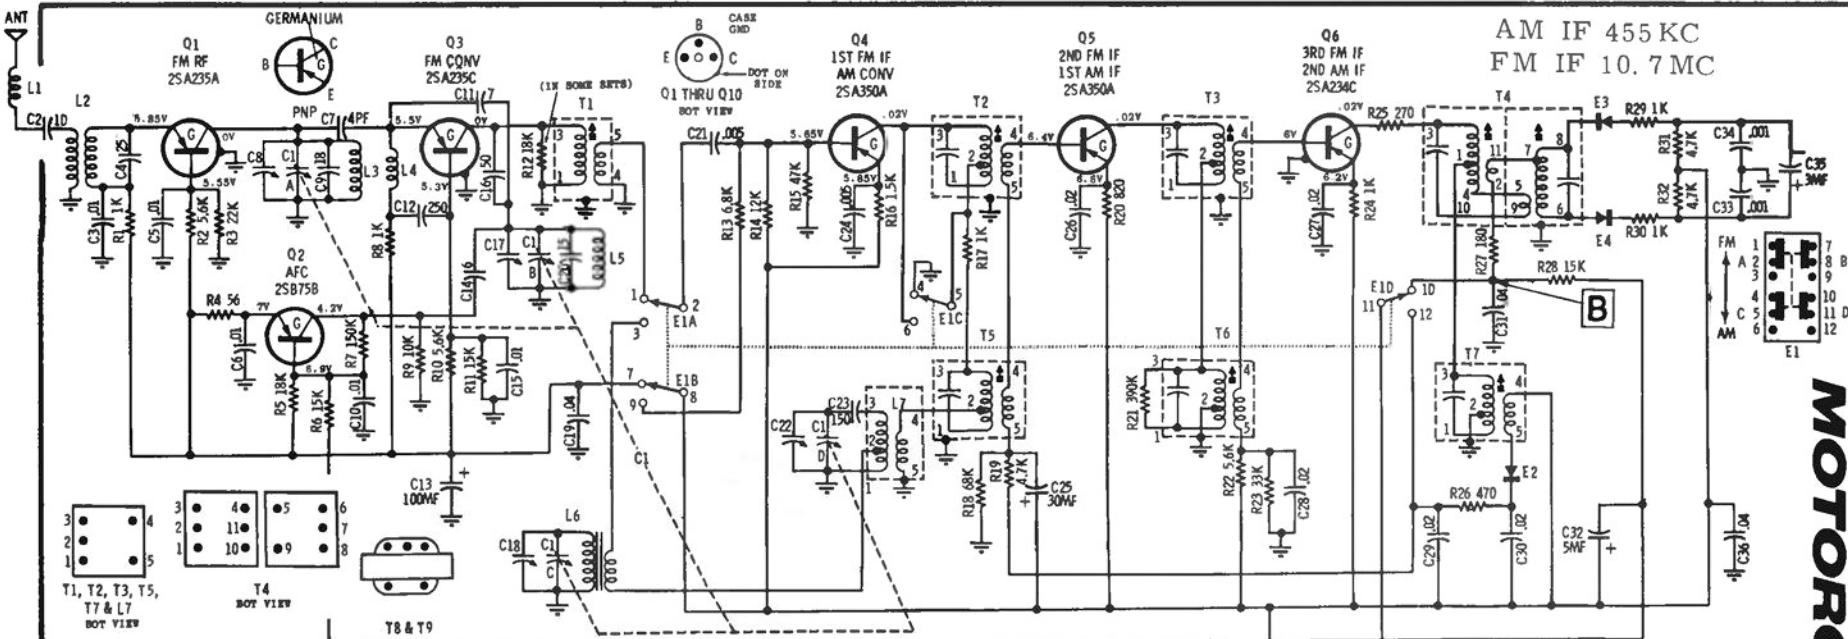


PARTS LOCATION

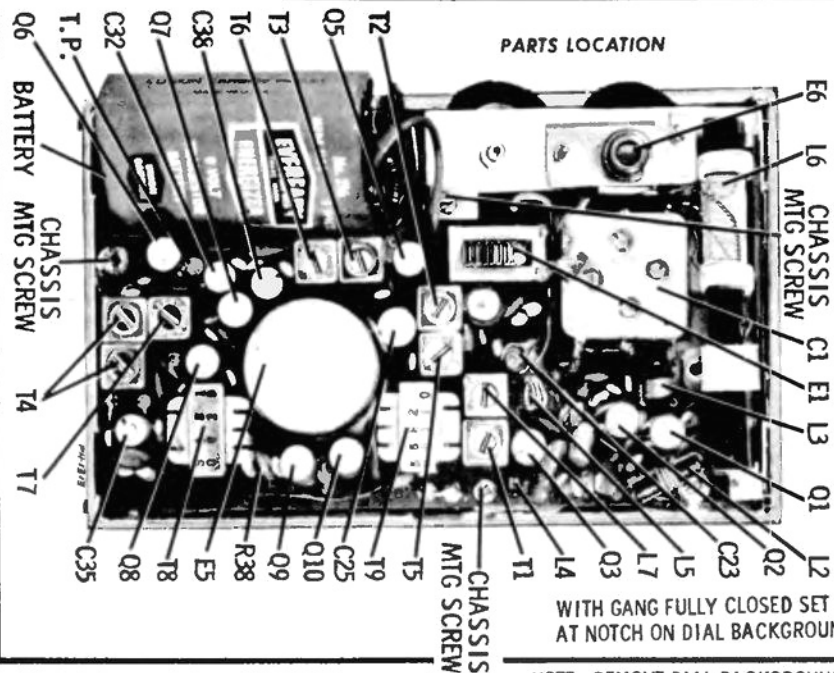


WITH GANG FULLY CLOSED SET POINTER
AT NOTCH ON DIAL BACKGROUND.

NOTE: REMOVE DIAL BACKGROUND BEFORE RESTRINGING.

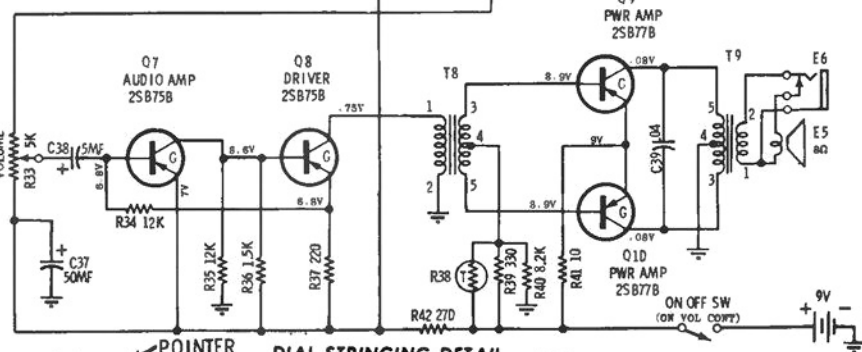

POINTER DIAL STRINGING DETAIL

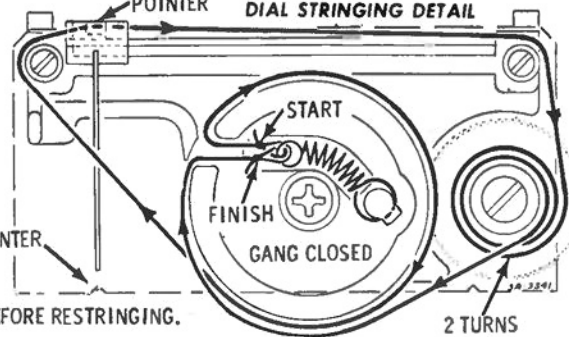

NOTES:

CAPACITORS-UNLESS OTHERWISE SPECIFIED
DECIMAL VALUES IN MF, ALL OTHER IN PF.
VOLTAGES-MEASURED FROM POINT INDICATED
TO GROUND WITH VTVM $\pm 10\%$ NO SIGNAL IN.
INPUT VOLTAGE- 9V
TUNING RANGE-
FM 88MC TO 108MC IF 10.7MC
AM 540KC TO 1600KC IF 455KC
ZERO SIGNAL CURRENT-APPROX 11MA
E1 SHOWN IN FM POSITION