

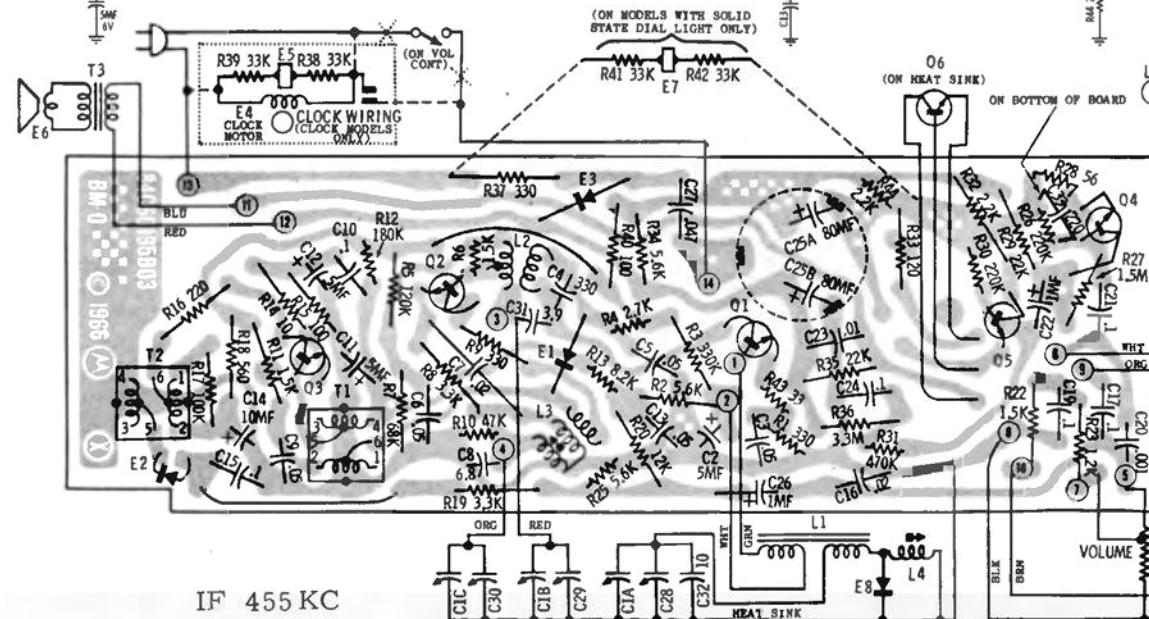


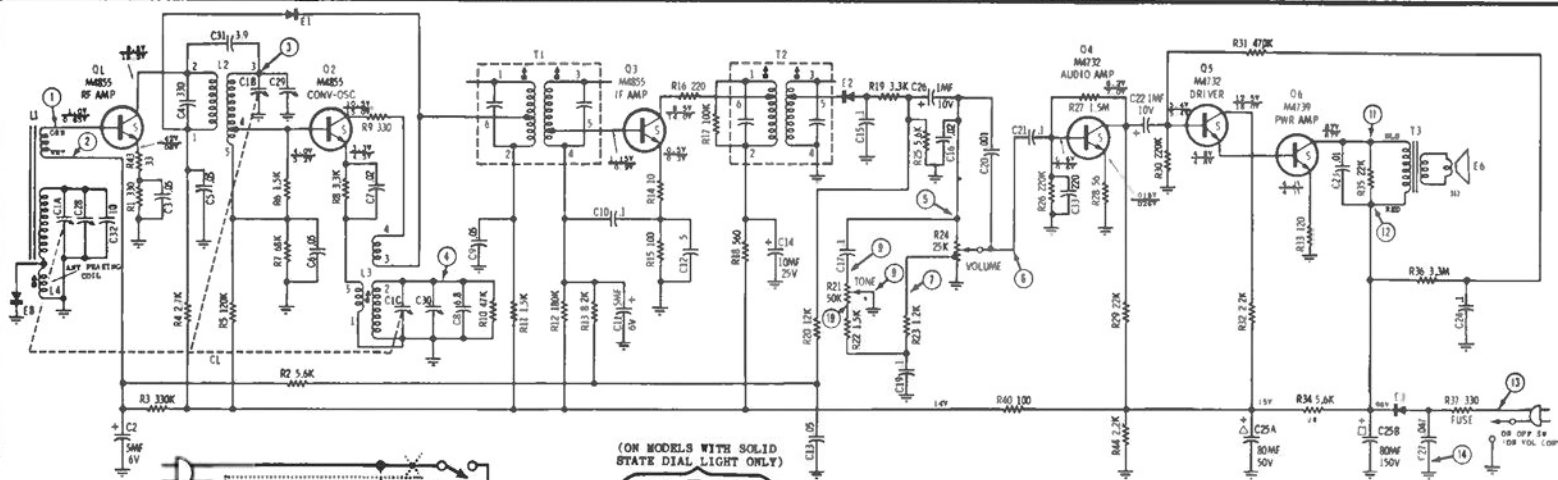


BOTTOM VIEW

PLATED CHASSIS REFERENCE POINTS AND PARTS LOCATION (VIEW FROM WIRING SIDE OF BOARD)

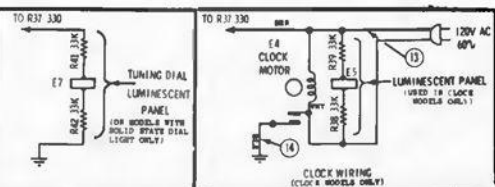

ALIGNMENT POINTS

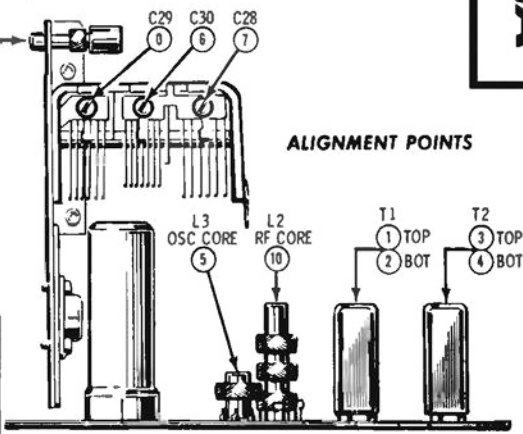

NOTES:
CAPACITORS - UNLESS OTHERWISE SPECIFIED, DECIMAL VALUES IN MF, ALL OTHERS IN PF. VOLTAGES - MEASURED FROM POINT INDICATED TO GROUND WITH A VTVM $\pm 10\%$.
WHEN TWO VOLTAGES ARE SHOWN:
UPPER V - WITH NO SIGNAL INPUT.
LOWER V - WITH STRONG SIGNAL INPUT.
VOL. AT MIN.
AM RANGE - 535KC TO 1620KC, AM IF 455KC.