

PHILCO

MODELS F-760 and F-963

SPECIFICATIONS

Cabinet: Plastic, table model; Model F-963 has a rotary dial scale with a 5:1 drive ratio. Model F-760 has a slide rule dial with a 6:1 drive ratio.

Frequency Coverage: 535 KC to 1620 KC.

Intermediate Frequency: 455 KC.

Audio Output: 0.9 watts.




Operating Voltage: Model F-963—105 to 120 volts, AC-DC; Model F-760—105 to 120 volts, AC.

Aerial: High impedance loop mounted on back.

Speakers: (2) 4" pm speakers, each with 3.2 ohm voice coil.

Philco Tubes: 12BA6 RF Amplifier, 12BE6 Oscillator-Converter, 12BA6 IF Amplifier, 12AV6 Detector—AVC-1st Audio, 35C5 Audio Output, 35W4 Rectifier and a type 47 Dial Light.

Timer: F-760 only—A fully automatic Telechron (type C-103) internal timer and clock. Includes Sleep-Switch, Buzzer Alarm, and "Lullaway" Slow Shut-off.

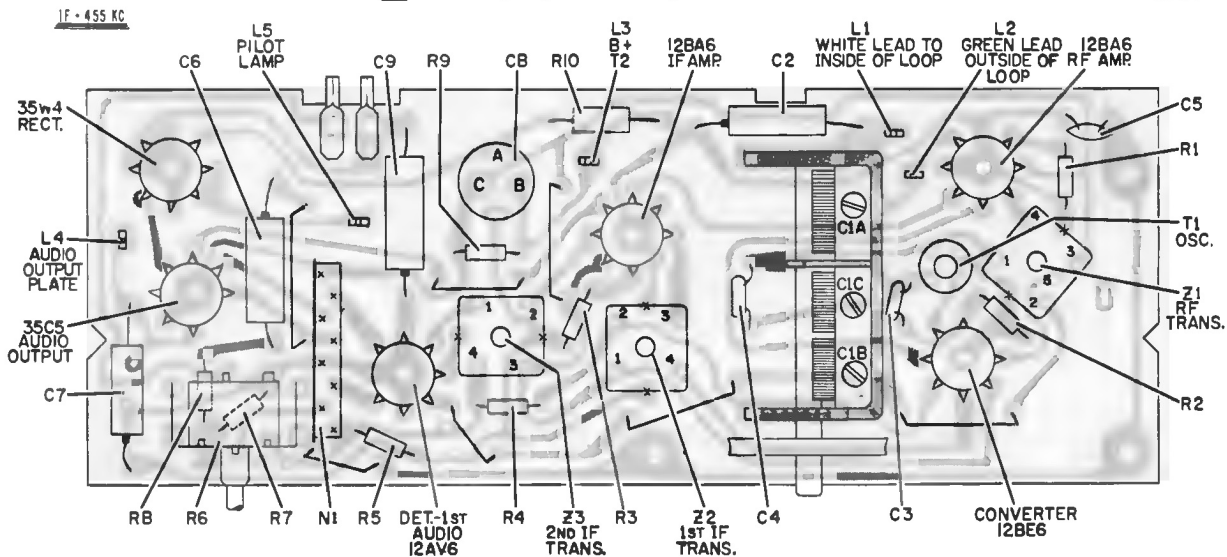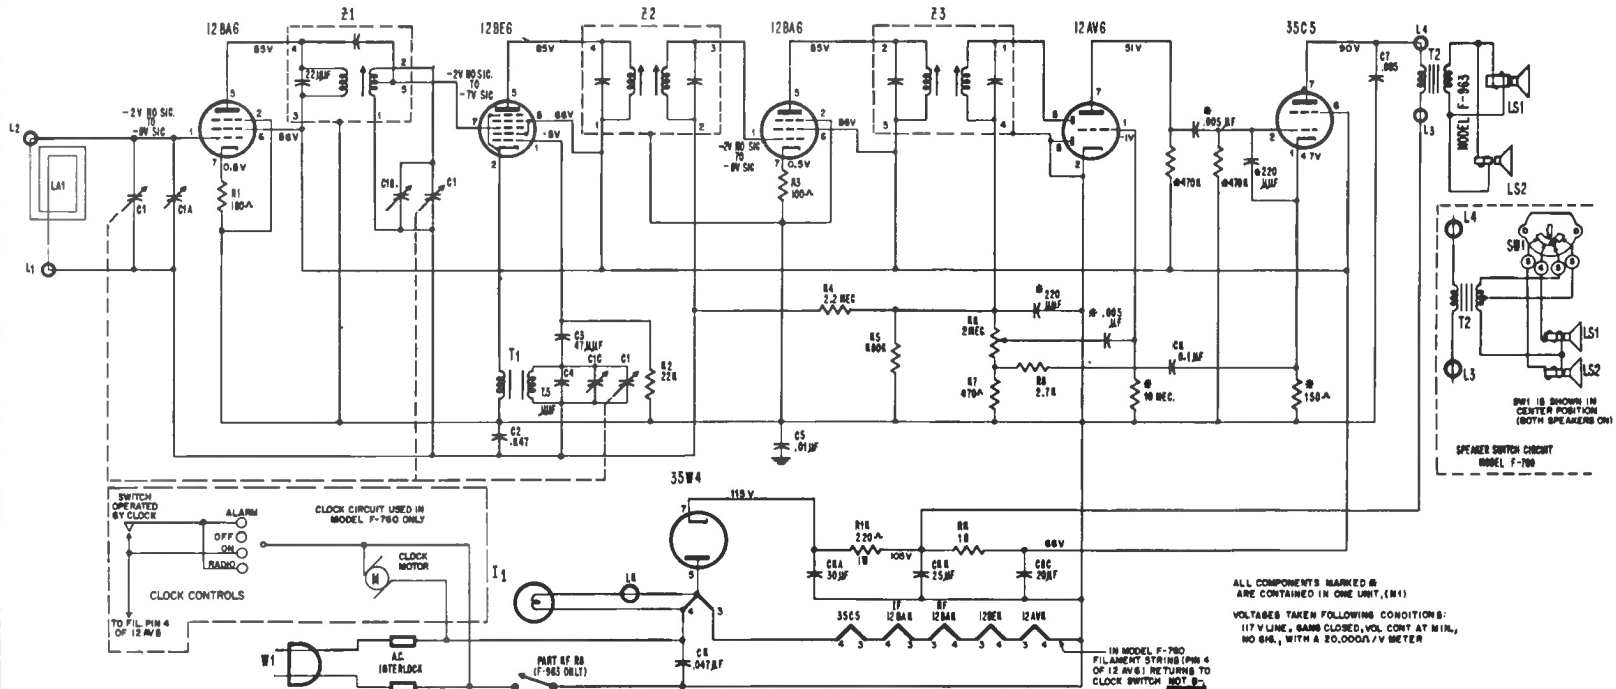

Composite View, Component Layout of Printed Panel