

PHILCO PHONOGRAPH

MODEL G-1410

SPECIFICATIONS

AUDIO OUTPUT—1.0 watt each channel.


OPERATING VOLTAGE—105-125 volts, 60 cycles a.c.

POWER CONSUMPTION—60 watts.


RECORD CHANGER—M-40, 4 speed automatic record changer with stereophonic pickup.

VOLUME-BALANCE CONTROL

The volume-balance controls for the two amplifier channels are mounted in tandem with concentric shafts. The inner shaft is spring loaded and locked to the outer shaft. Turning the shaft of one control simultaneously turns the shaft of the other control. Pushing in the inner shaft unlocks the controls to permit individual volume control adjustment.

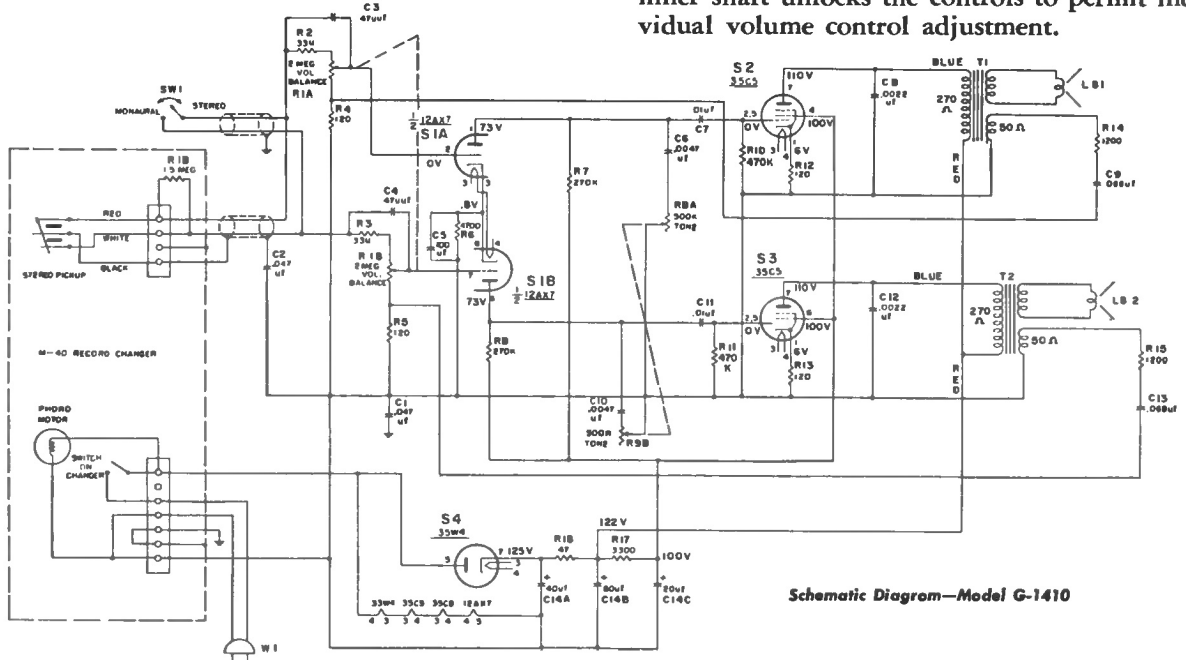

Schematic Diagram—Model G-1410

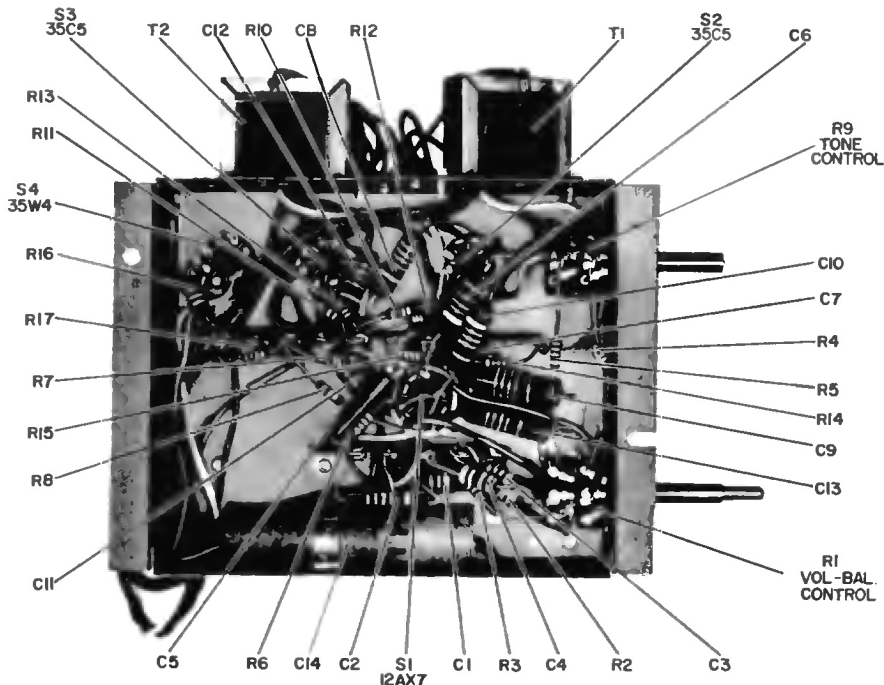

Base View, Components Layout—Model G-1410