



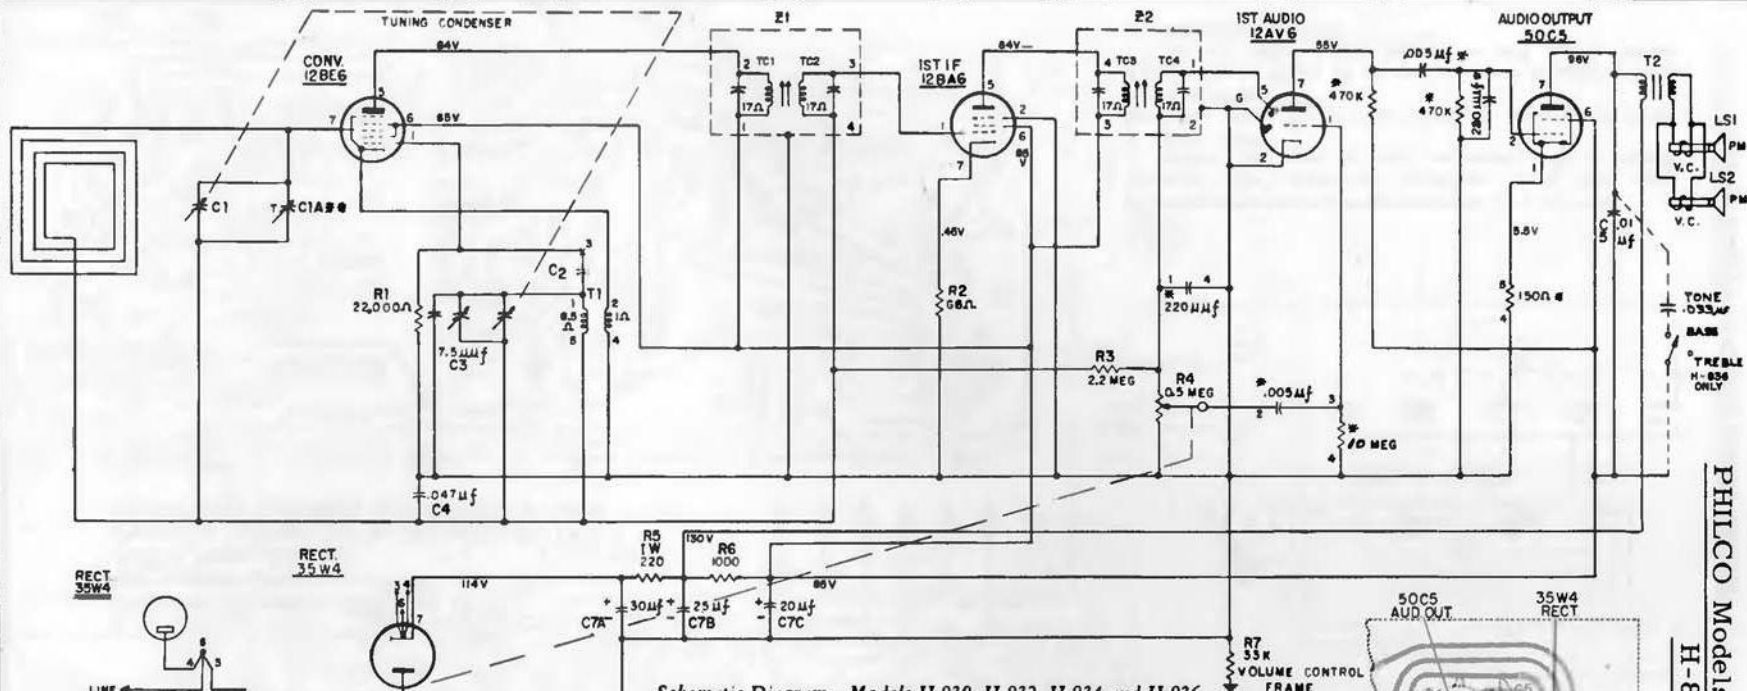

I. F. 455 KC.

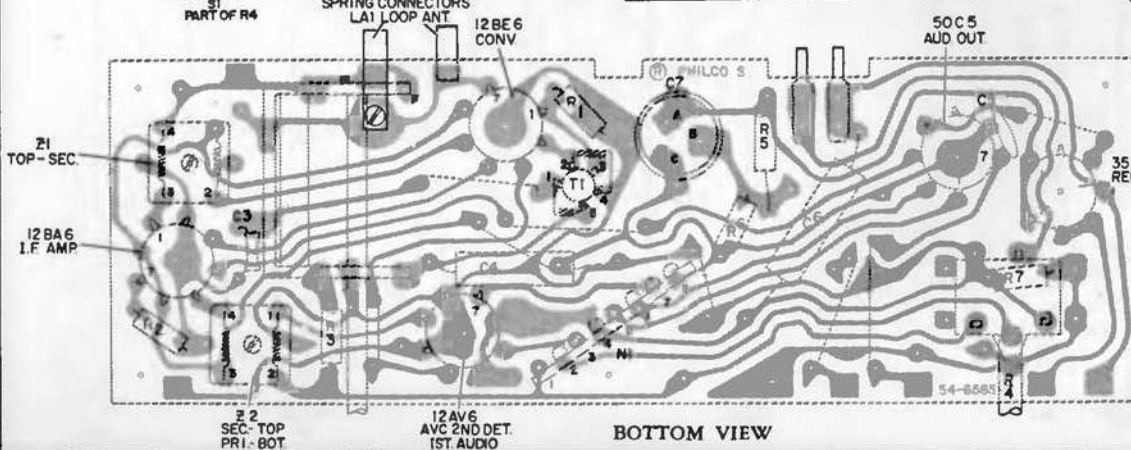

NOTES:

- All capacitors over 1 are in mmf, unless otherwise noted.
- All capacitors under 1 are in mfd.
- All resistors are 1/2 watt, 10%, carbon type, unless otherwise noted.
- Voltages are taken with a 20,000 ohm/volt meter, between the point indicated and B-, under no-signal condition.
- I1 pilot light, is used in Model H-836 only.
- C1 is part of osc. coil.
- Model H-838 uses only 1 speaker and a magnecore antenna.
- *Indicates component is part of N1.
- **C1A is on underside of panel.

PHILCO Models H-830, H-832,
H-834, H-836