



PHILCO

TABLE/CLOCK AM-FM RADIO L799, L926, L927, L928, & L929

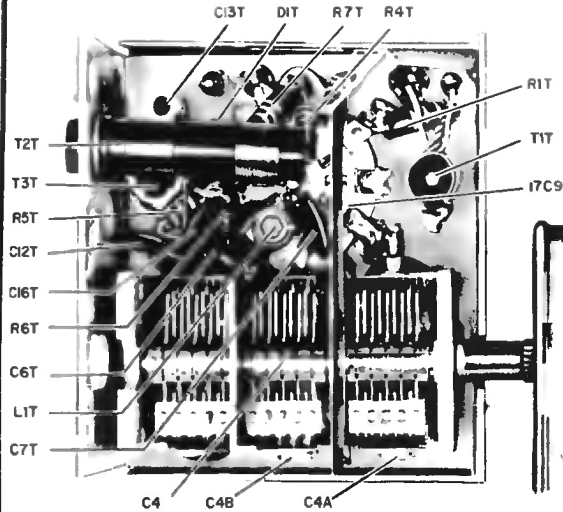

FM Tuner, Bottom View,




ALIGNMENT & TEST POINTS


CLOCK REMOVAL

Model L-799

1. Remove all knobs from front panel.
2. Remove clear plastic front by gently releasing the mounting tab at the bottom center with a screwdriver.
3. Remove clock hands being especially careful of the minute hand.
4. Remove connecting leads from the clock assembly.
5. Using a narrow blade screwdriver, gently remove the four clock mounting clips.

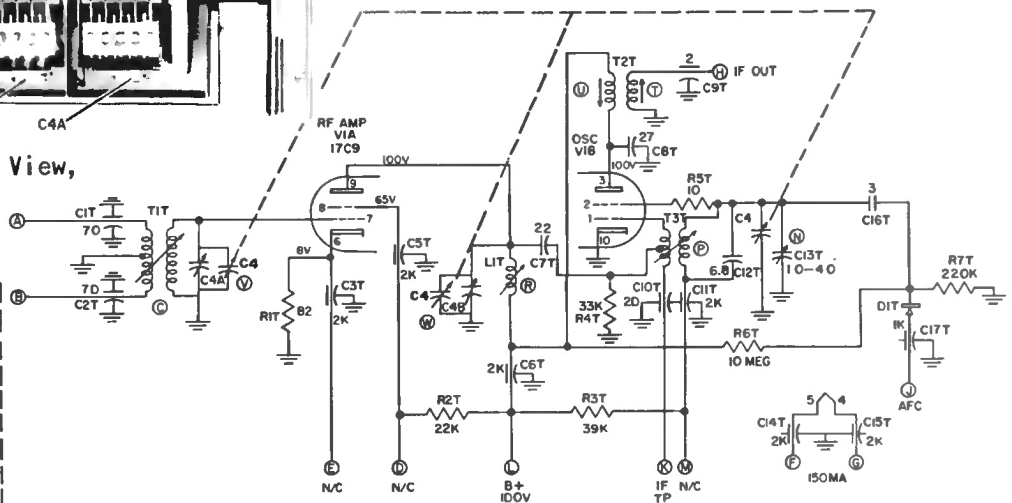

Schematic Diagram, FM Tuner (All Models)

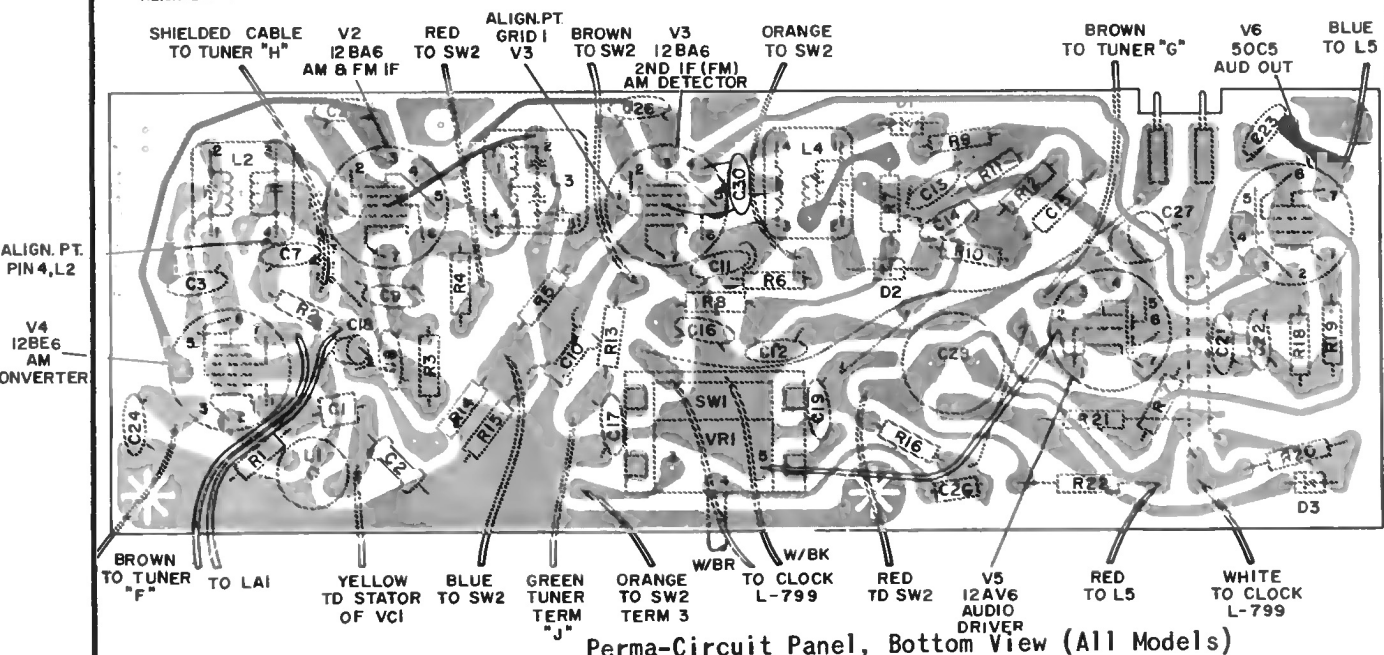

Perma-Circuit Panel, Bottom View (All Models)

TABLE/CLOCK AM-FM RADIO
L799, L926, L927, L928, & L929

