



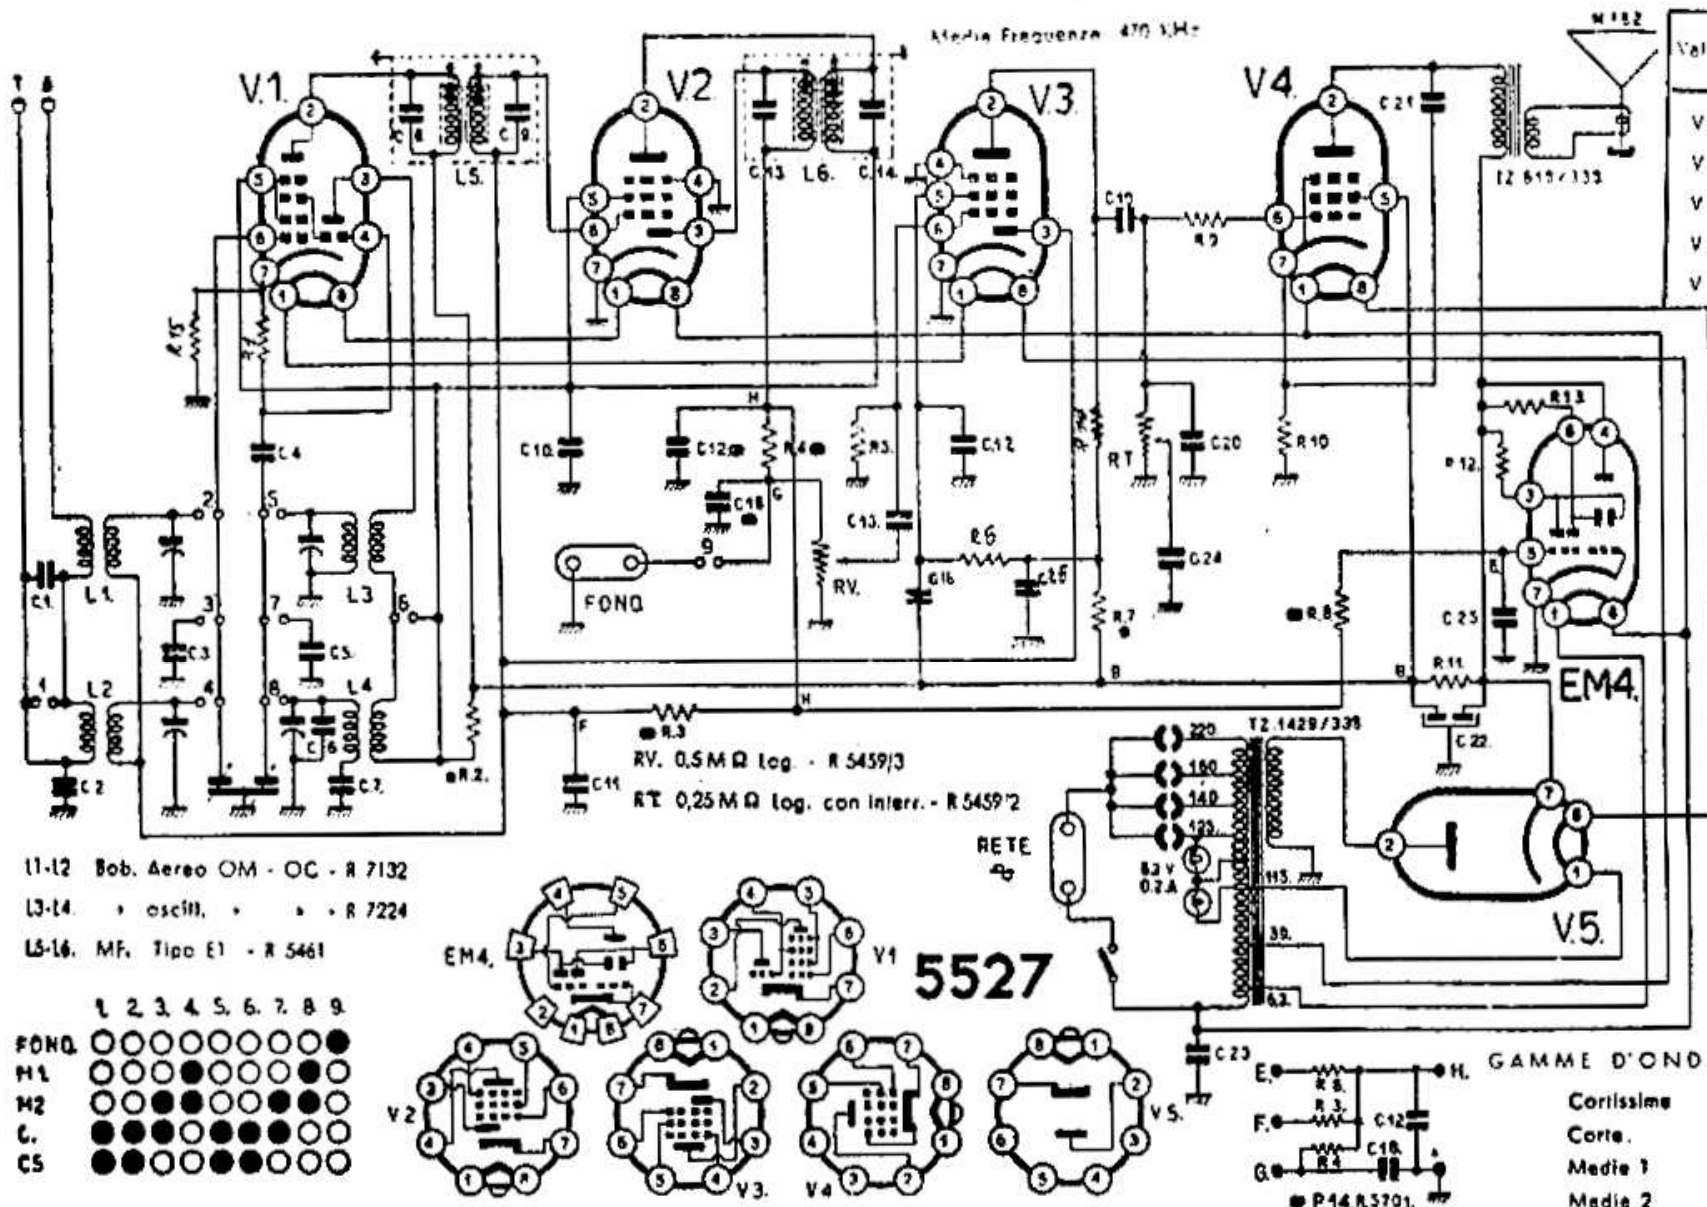

Valvole	Tipo	TENSIONE AI PIEDINI							
		2	3	4	5	6	7	8	
V 1	UCH42	160	80	—	80	· 1	—	—	
V 2	UAF42	80	—	—	80	· 1	—	—	
V 3	UAF42	40	—	—	25	—	—	—	
V 4	UL41	170	—	—	160	—	8	—	
V 5	UY41	220	—	—	—	—	185	—	
	EM4	—	22	180	· 1	22	—	—	

Nomin.	Valore	Nomin.	Valore
C 1	50 pf	R 1	20 KΩ
C 2	1.000 "	R 2	10 KΩ
C 3	200 "	R 3	2 MΩ
C 4	50 "	R 4	50 KΩ
C 5	195 "	R 5	10 MΩ
C 6	10 "	R 6	1 MΩ
C 7	425 "	R 7	0,2 MΩ
C 8	200 "	R 8	2 MΩ
C 9	200 "	R 9	0,1 MΩ
C 10	100.000 "	R 10	140 Ω
C 11	50.000 "	R 11	1250 Ω
C 12	200 "	R 12	2 MΩ
C 13	200 "	R 13	2 MΩ
C 14	200 "	R 14	0,2 MΩ
C 15	2.000 "	R 15	180 Ω
C 16	5.000 "		
C 17	50.000 "		
C 18	100 "		
C 19	25.000 "		
C 20	150 "		
C 21	15.000 "		
C 22	32+32 M		
C 23	10.000 pf		
C 24	5.000 "		
C 25	25.000 "		
C 26	100 pf		

Condensatore variabile 2CV2 - R 5397

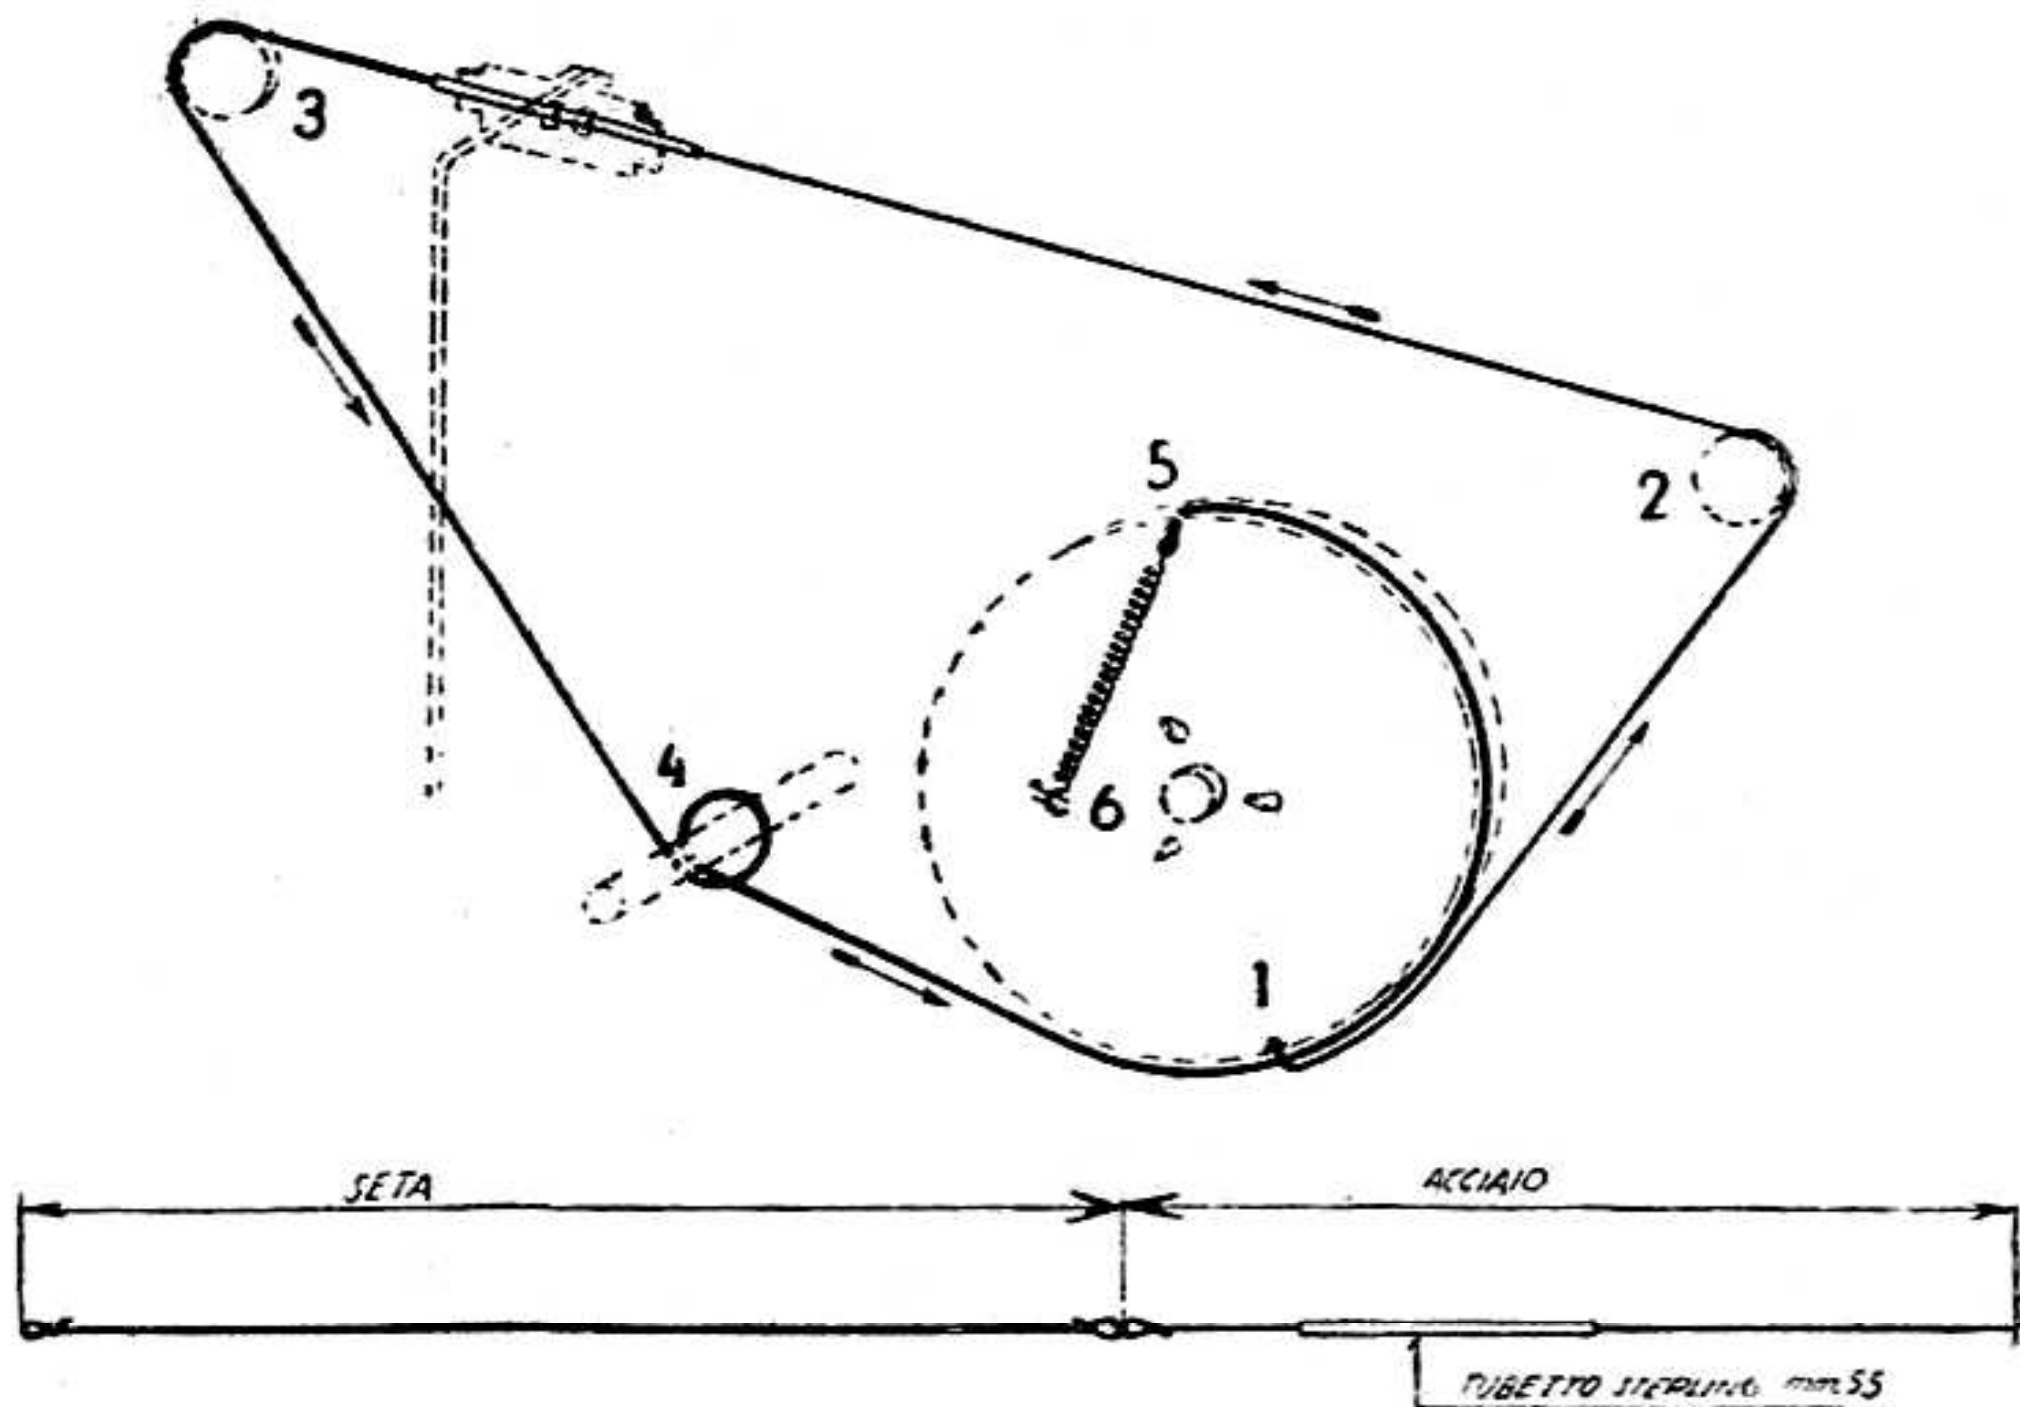

PHONOLA 5525 - 5527 e 5531 A - Caratteristiche della funicella per il movimento dell'indice.