



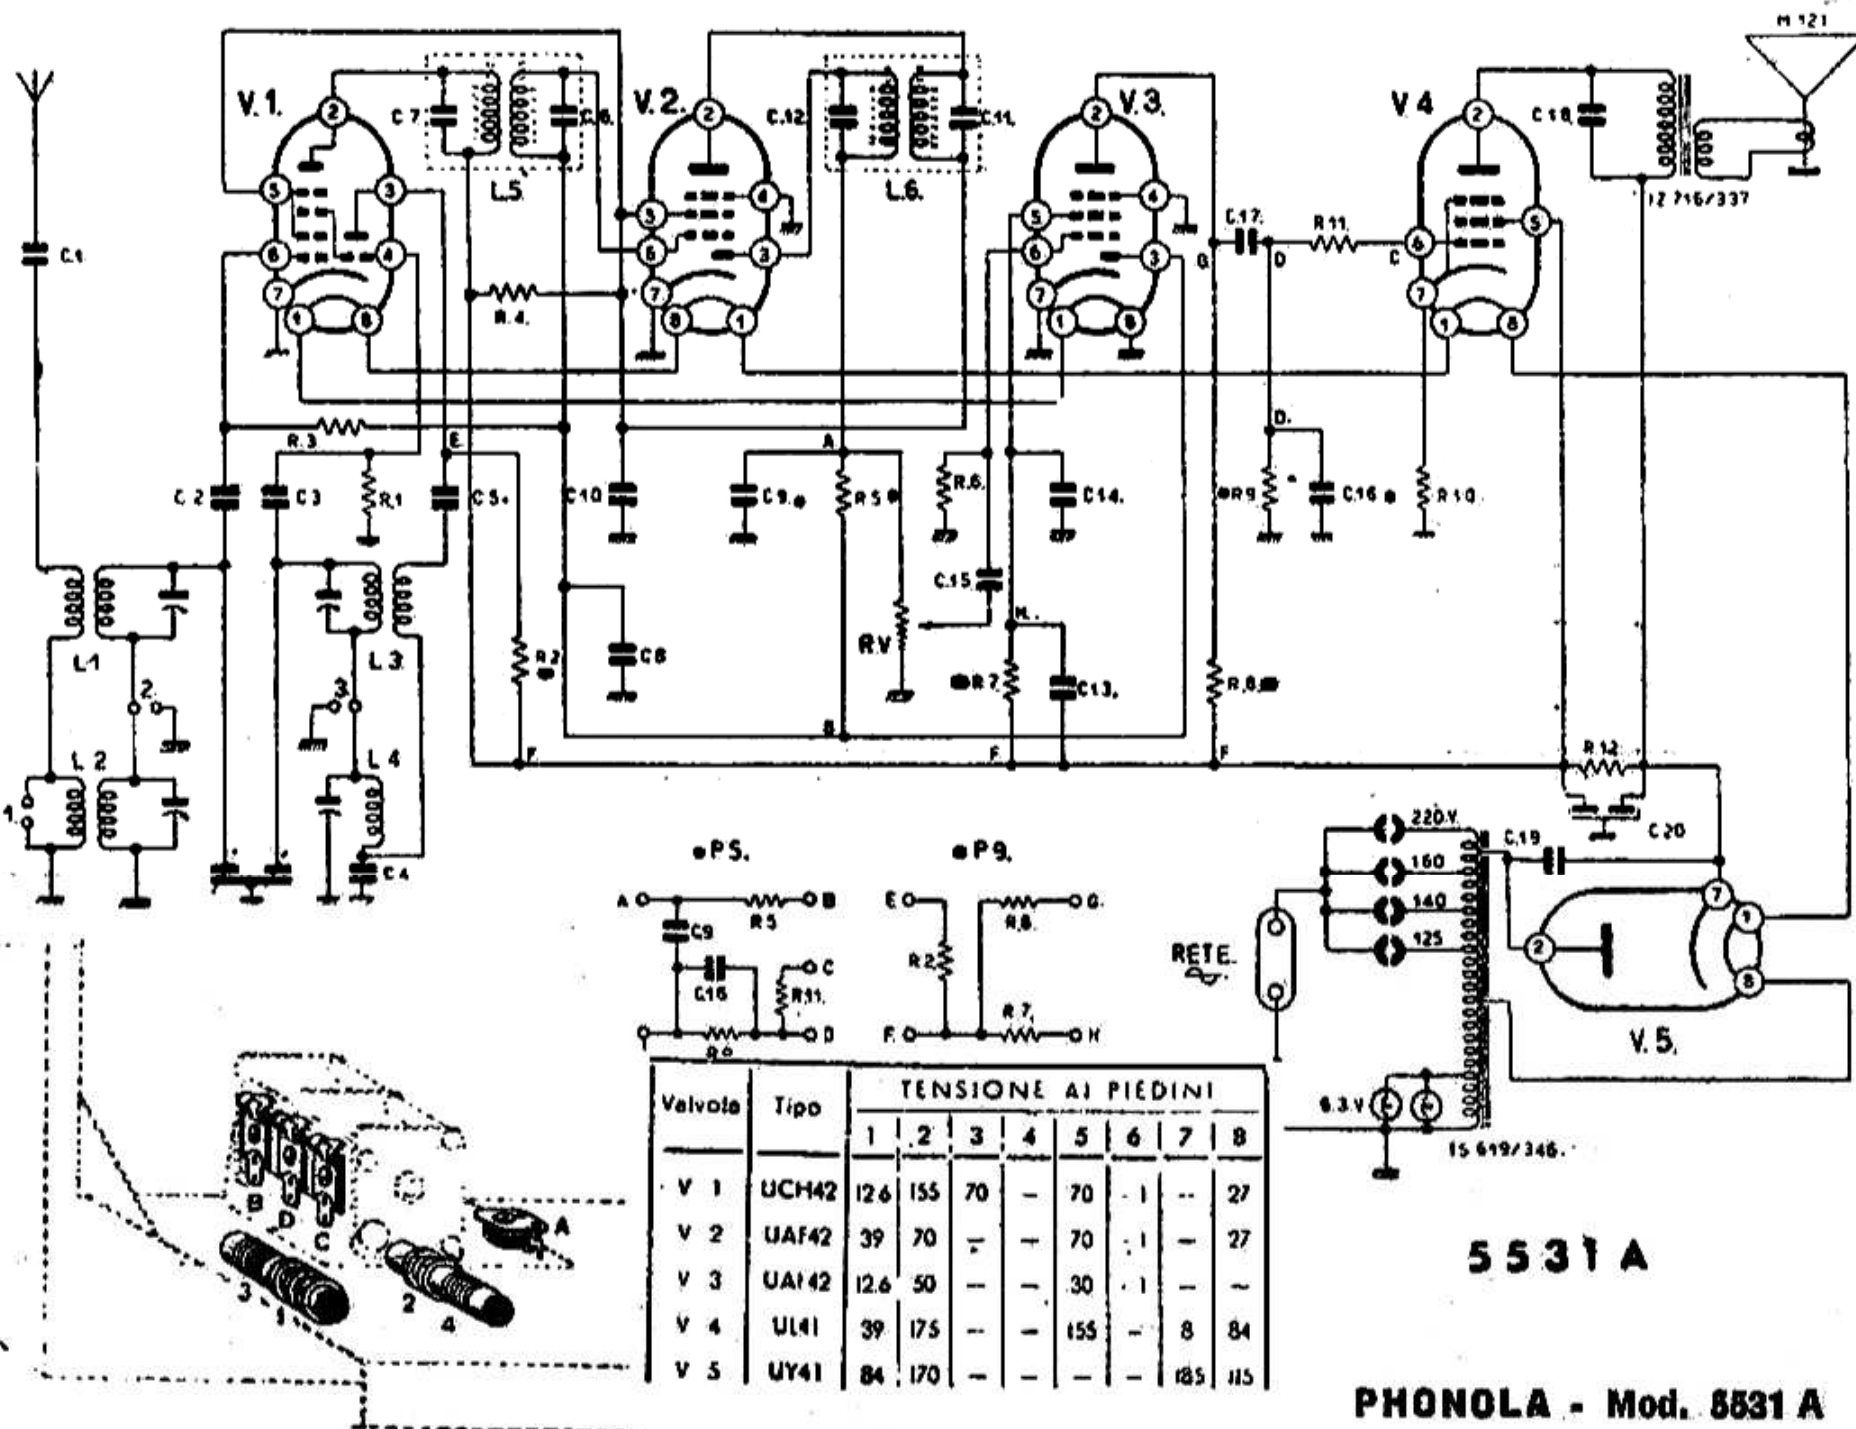

C 1	1000 pF
C 2	25 pF
C 3	10 pF
C 4	235 pF
C 5	200 pF
C 6	200 pF
C 7	200 pF
C 8	50kpF
C 9	200 pF
C10	100kpF
C11	200 pF
C12	200 pF
C13	5kpF
C14	50kpF
C15	2kpF
C16	200 pF
C17	25 kpF
C18	10. kpF
C19	25 kpF
C20	32-32MF
R 1	0.1 MQ
R 2	10 kQ
R 3	1 MQ
R 4	15 kQ
R 5	2 MQ
R 6	10 MQ
R 7	1 MQ
R 8	0.2 MQ
R 9	0.2 MQ
R10	140 Q
R11	0.1 MQ
R12	1600 Q

PHONOLA - Mod. 5531 A

S.A. FIMI - Mod. PHONOLA 5531 A - Media frequenza 470 kc. Finale: 175 V placca, 155 V schermo e 8 V catodo. Potenza indistorta 2 watt. Consumo 35 watt (V. istruzioni funicella a parte).

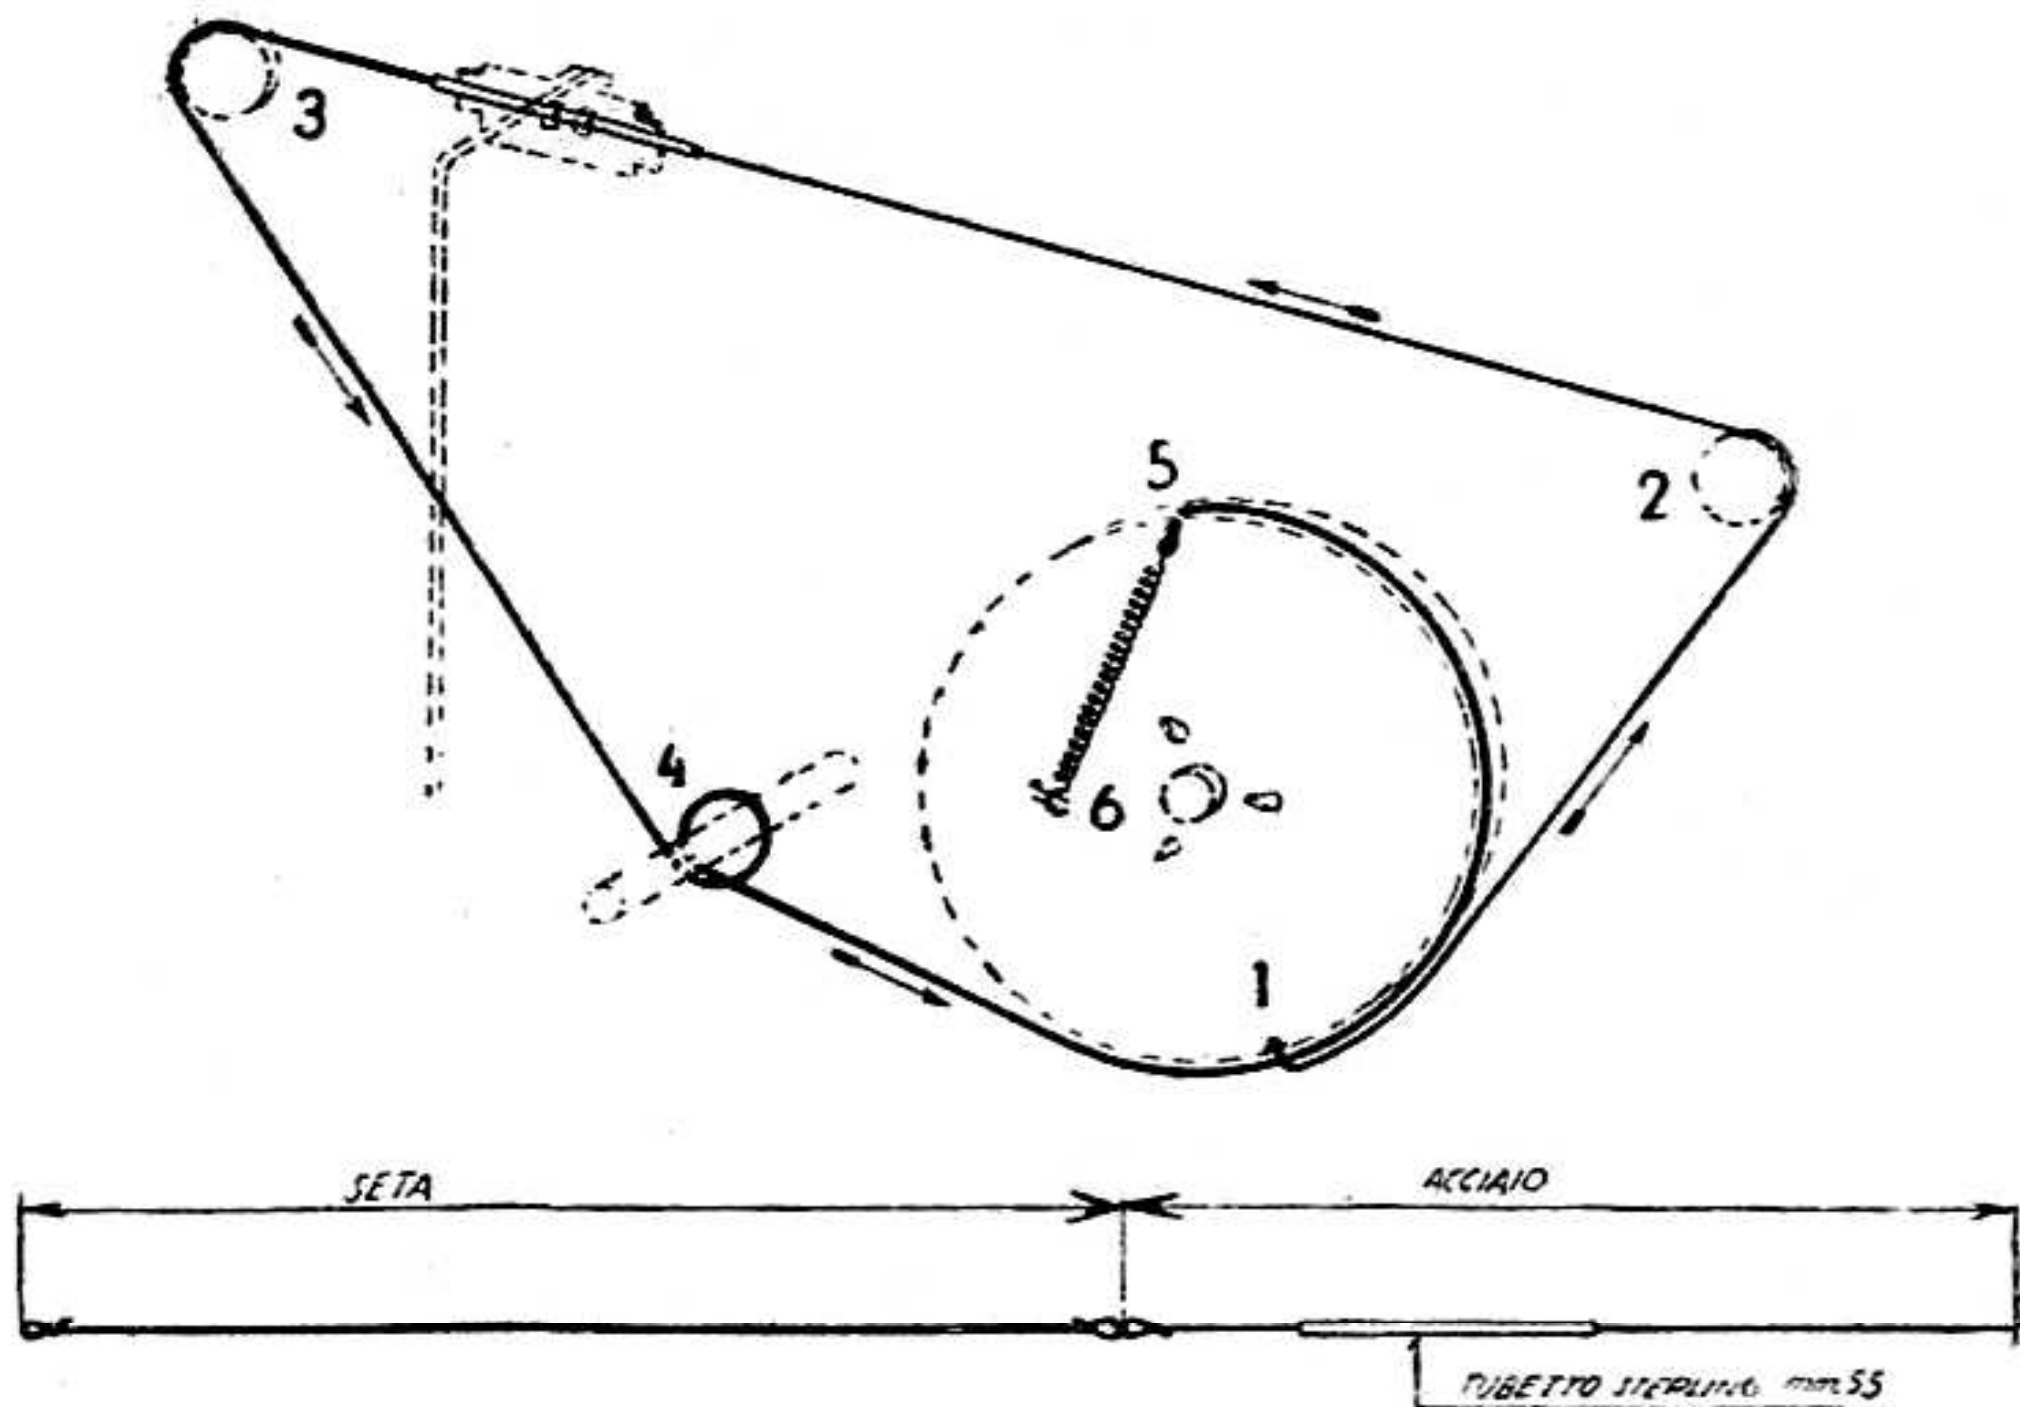

PHONOLA 5525 - 5527 e 5531 A - Caratteristiche della funicella per il movimento dell'indice.