



PHONOLA - Mod. 5533

C 1	50 pF	R 1	0.5 MΩ
C 2	25 pF	R 2	50 Ω
C 3	120 pF	R 3	50 kΩ
C 4	120 pF	R 4	31.5 kΩ
C 5	25 pF	R 5	31.5 kΩ
C 7	4 kpF	R 6	1 kΩ
C 8	400 pF	R 7	1 MΩ
C 9	200 pF	R 8	1 MΩ
C10	50 pF	R 9	2 kΩ
C11	200 pF	R10	50 kΩ
C12	200 pF	R11	0.25 MΩ
C13	50 kpF	R12	50 kΩ
C14	100 kpF	R13	10 MΩ
C15	25 pF	R14	2 MΩ
C16	200 pF	R15	40 Ω
C17	200 pF	R16	0.1 kΩ
C18	200 pF	R17	250 Ω
C19	10 kpF	R18	6000 Ω
C20	5 kpF		
C21	100 kpF		
C22	100 kpF		
C23	200 pF		
C24	25 kpF		
C25	2 kpF		
C26	16 MF		
C27	16 MF		
C28	5 kpF		
C29	5 kpF		
C30	2 kpF		

Valvola	Tipo
V 1	ECH42
V 2	EF41
V 3	EBC41
V 4	EL41
V 5	AZ41
	EM4

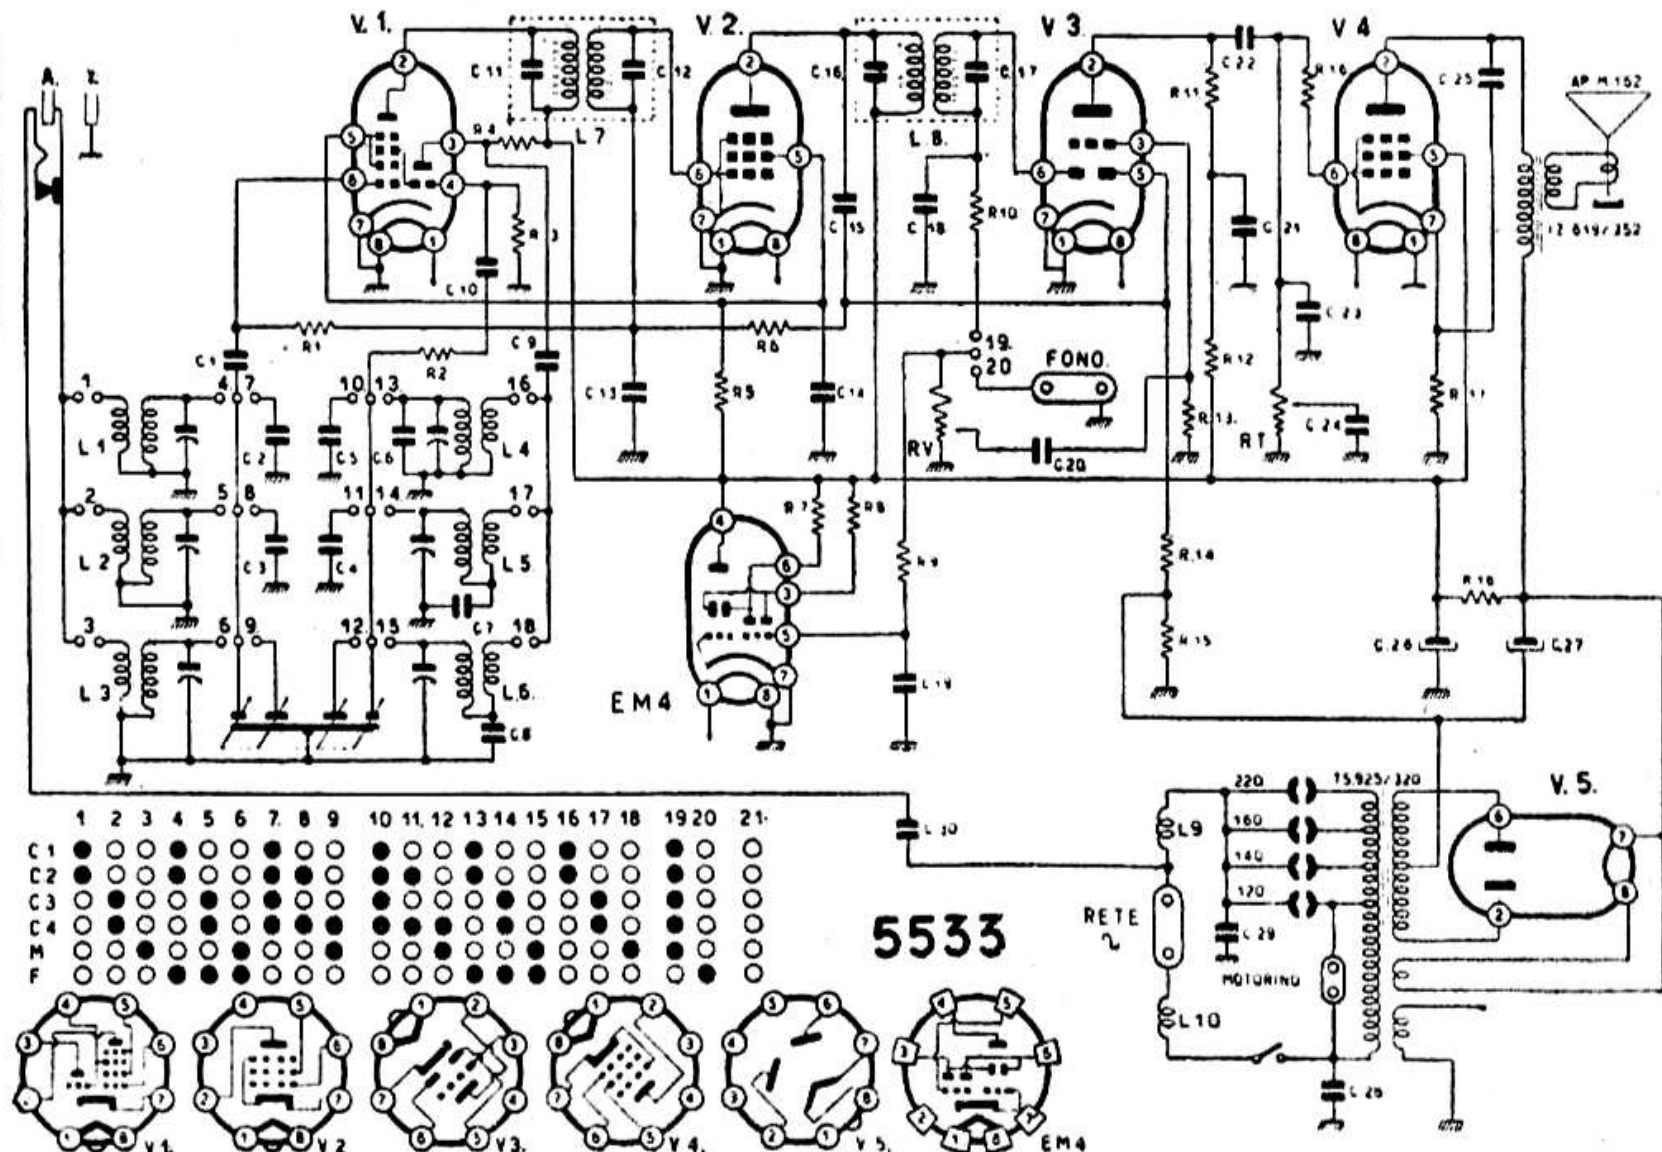

S.A. FIMI - Mod. PHONOLA 5533 - Onde medie e quattro gamme onde corte a bande allargate. Media frequenza 470 kc. Potenza indistorta 3,5W. (Per funicella v. figura a parte).

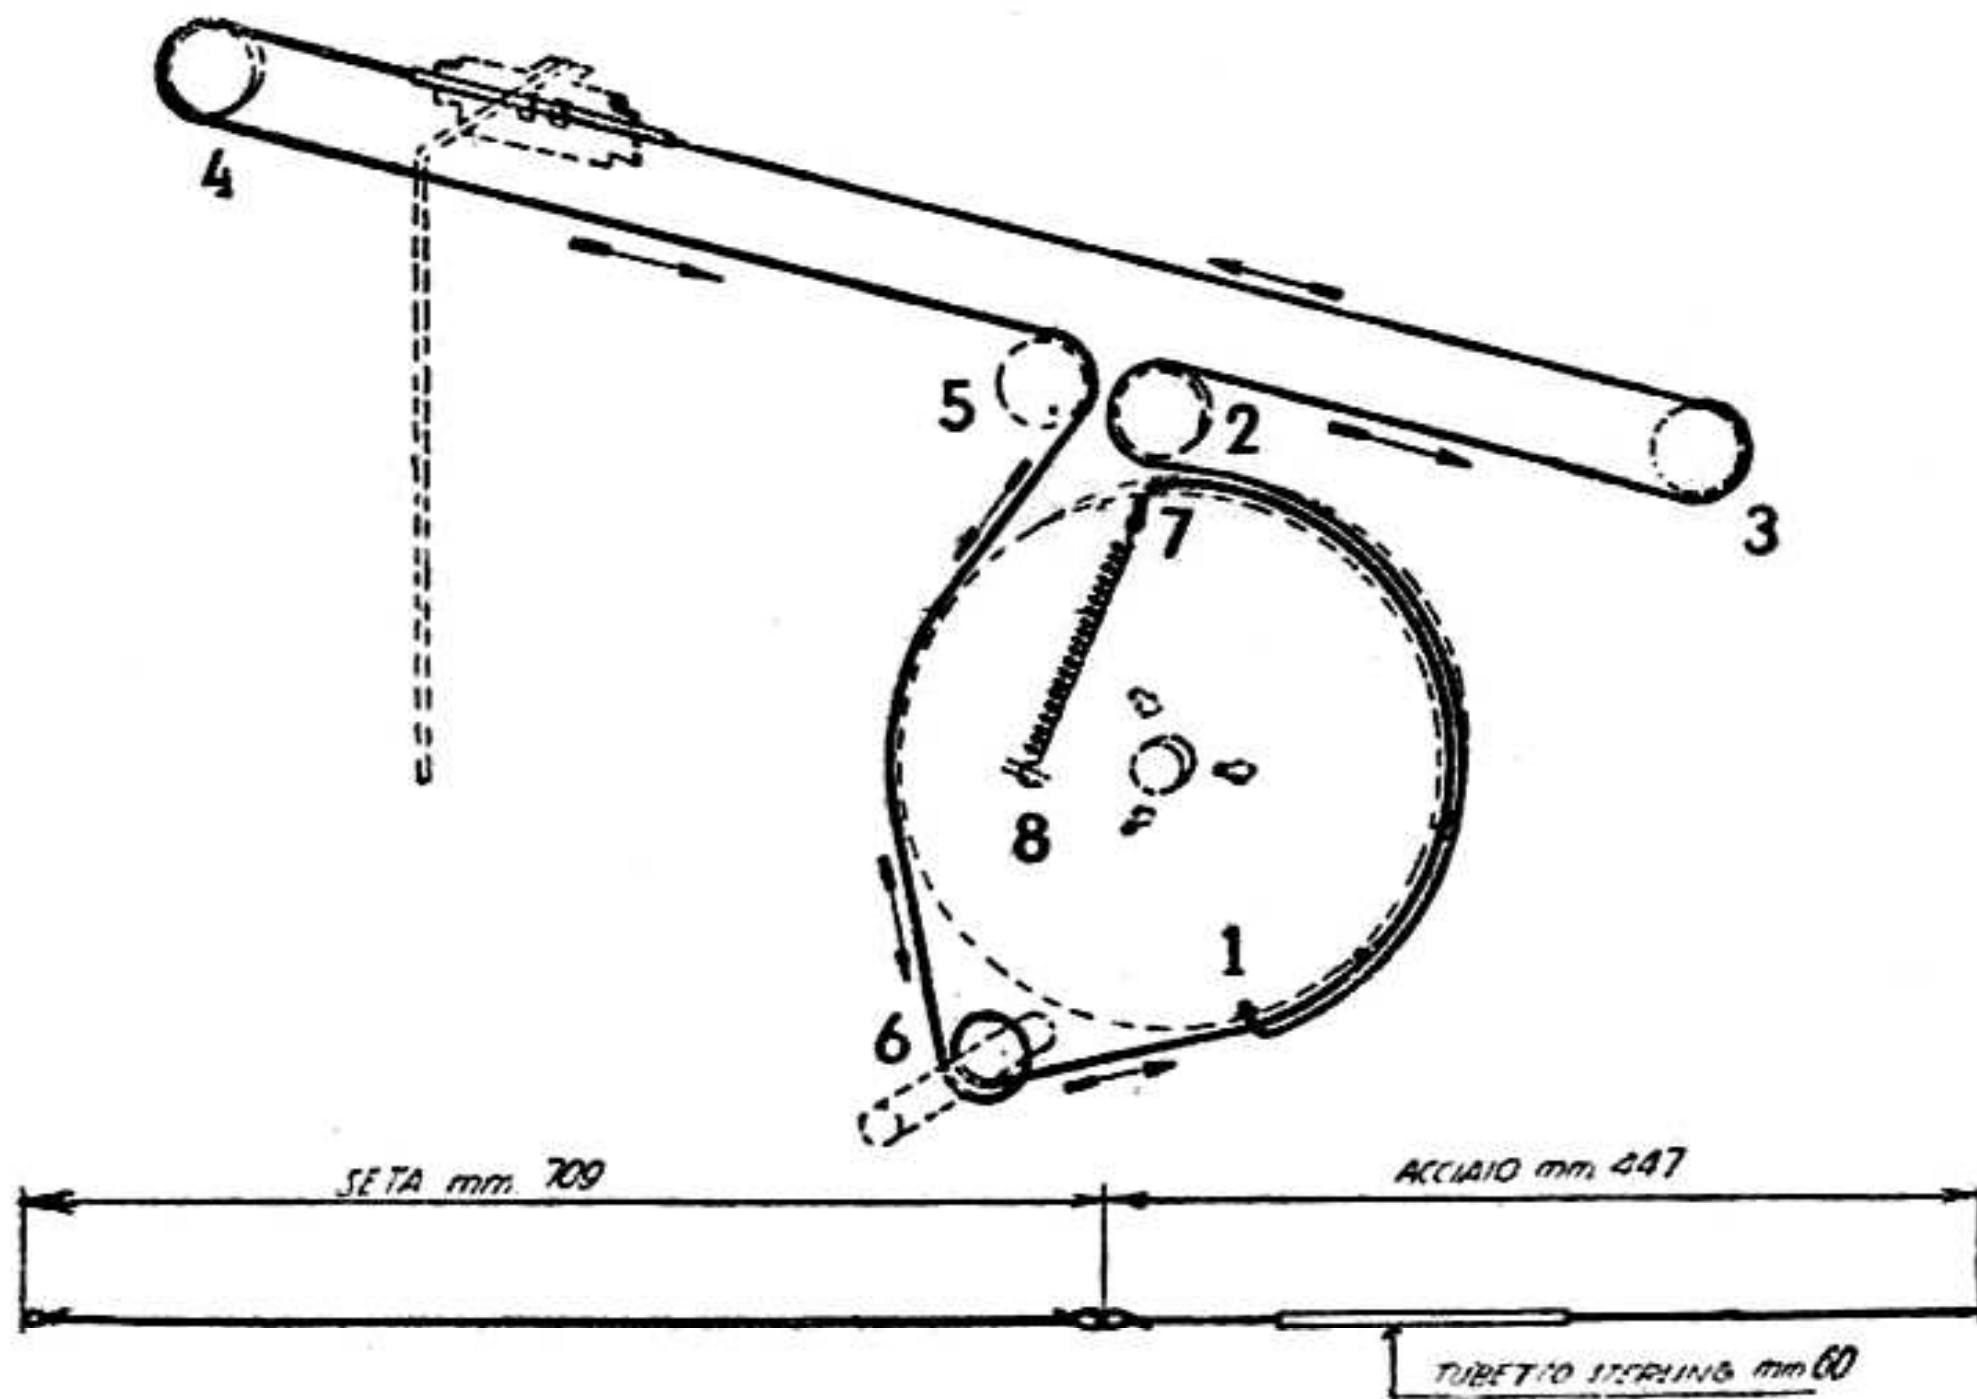

PHONOLA 5529 - 5530 e 5533 - Caratteristiche della funicella per il movimento dell'indice.