


MXA-3

V501
6AQ8/ECC85

V502a
1/2 6AN8

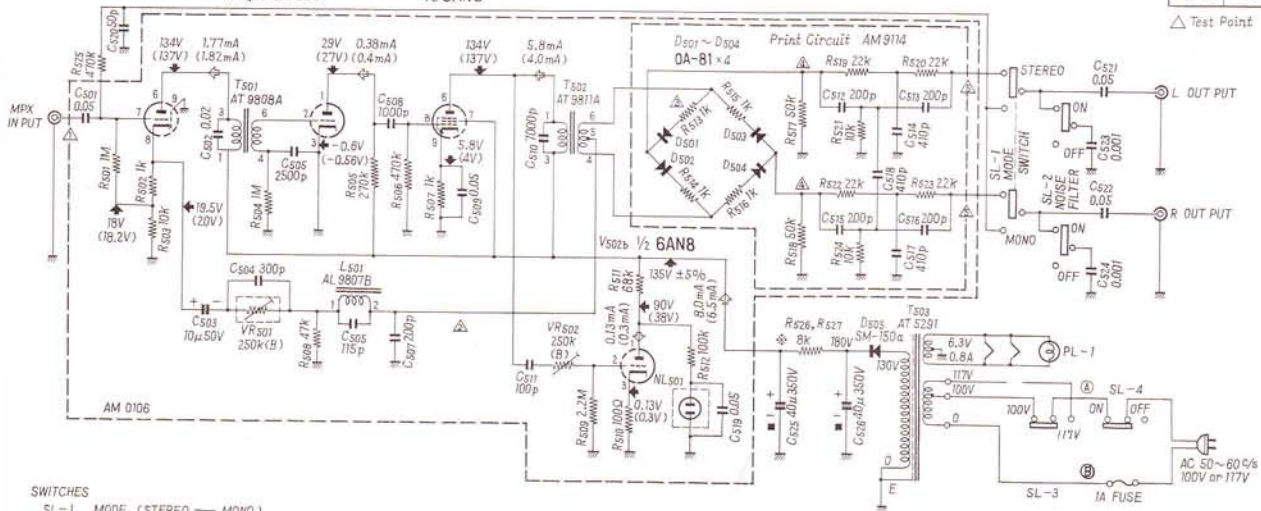

□	LAST
R	527
C	526

△ Test Point

SWITCHES

- SL-1 MODE (STEREO — MONO)
- SL-2 NOISE FILTER (ON — OFF)
- SL-3 LINE VOLTAGE (100V—117V/115V—230V)
- SL-4 POWER SWITCH (ON — OFF)

POTENTIOMETERS

- VR501 FM STEREO SEPARATION
- VR502 FM STEREO INDICATOR ADJUSTMENT

VOLTAGES AND CURRENTS READINGS

- () DC VOLTAGE
- ⊕ DIRECT CURRENT (NO INPUT SIGNAL)
- ◆ DC VOLTAGE (INPUT 3.5V P-P COMPOSITE SIGNAL)

- ✱ R526 4.7k 1W
- R527 3.3k 2W

