




AF amp ass'y AWK-035

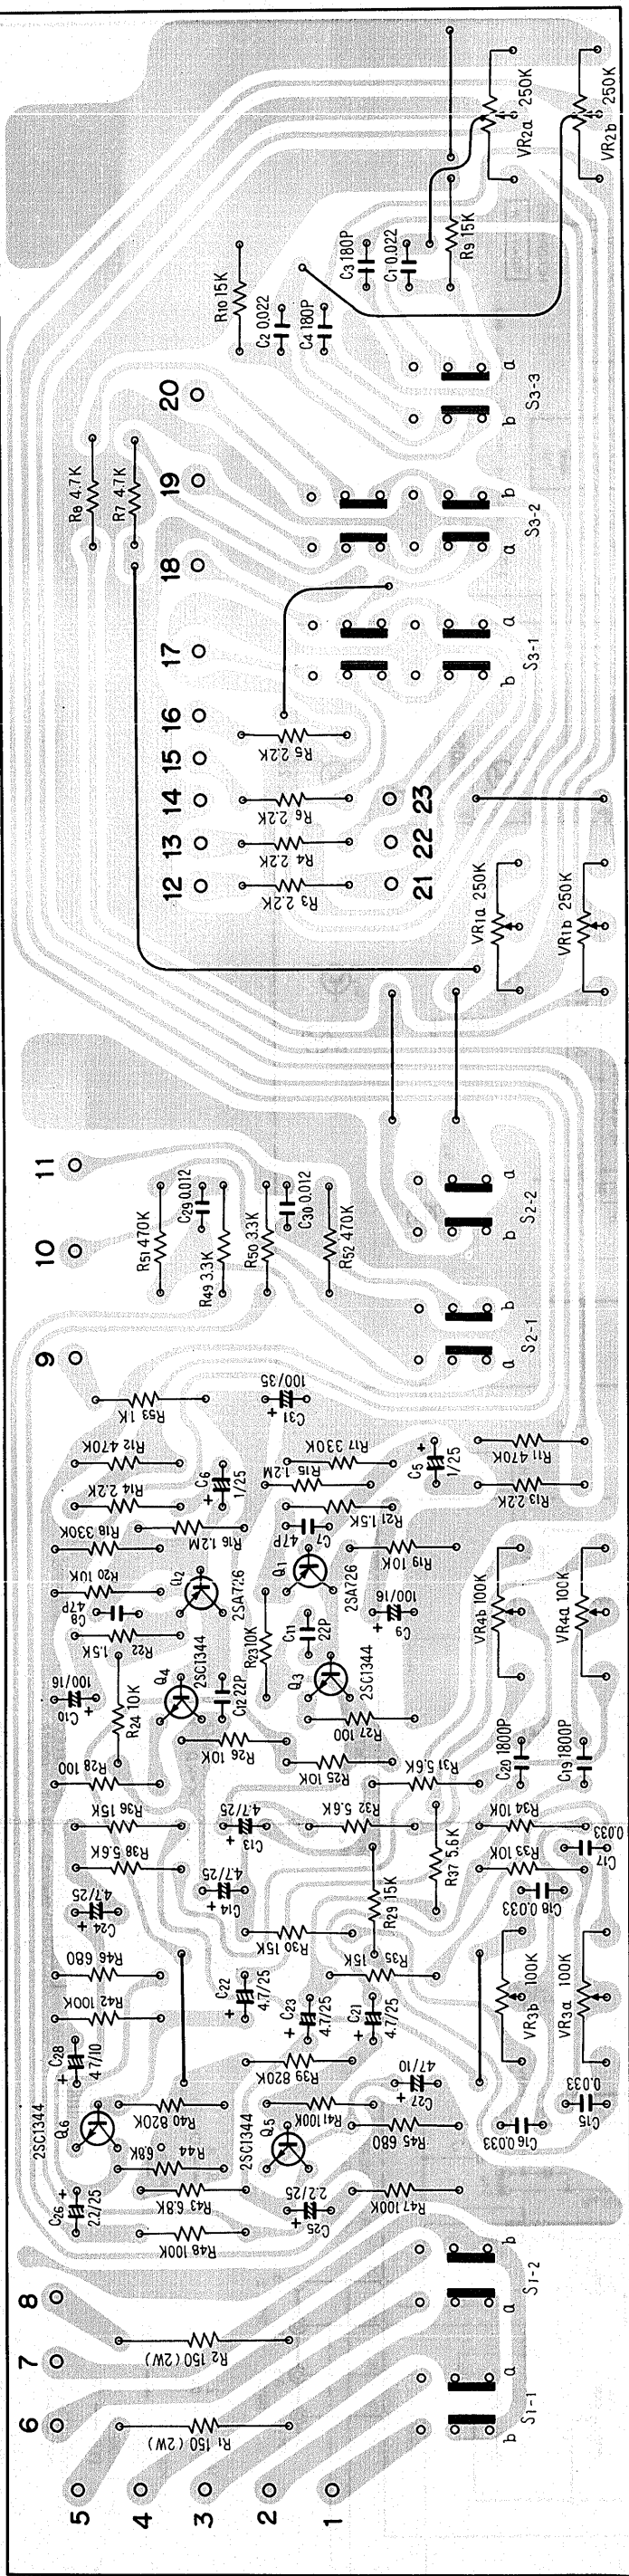


Tuner ass'y AWE-046

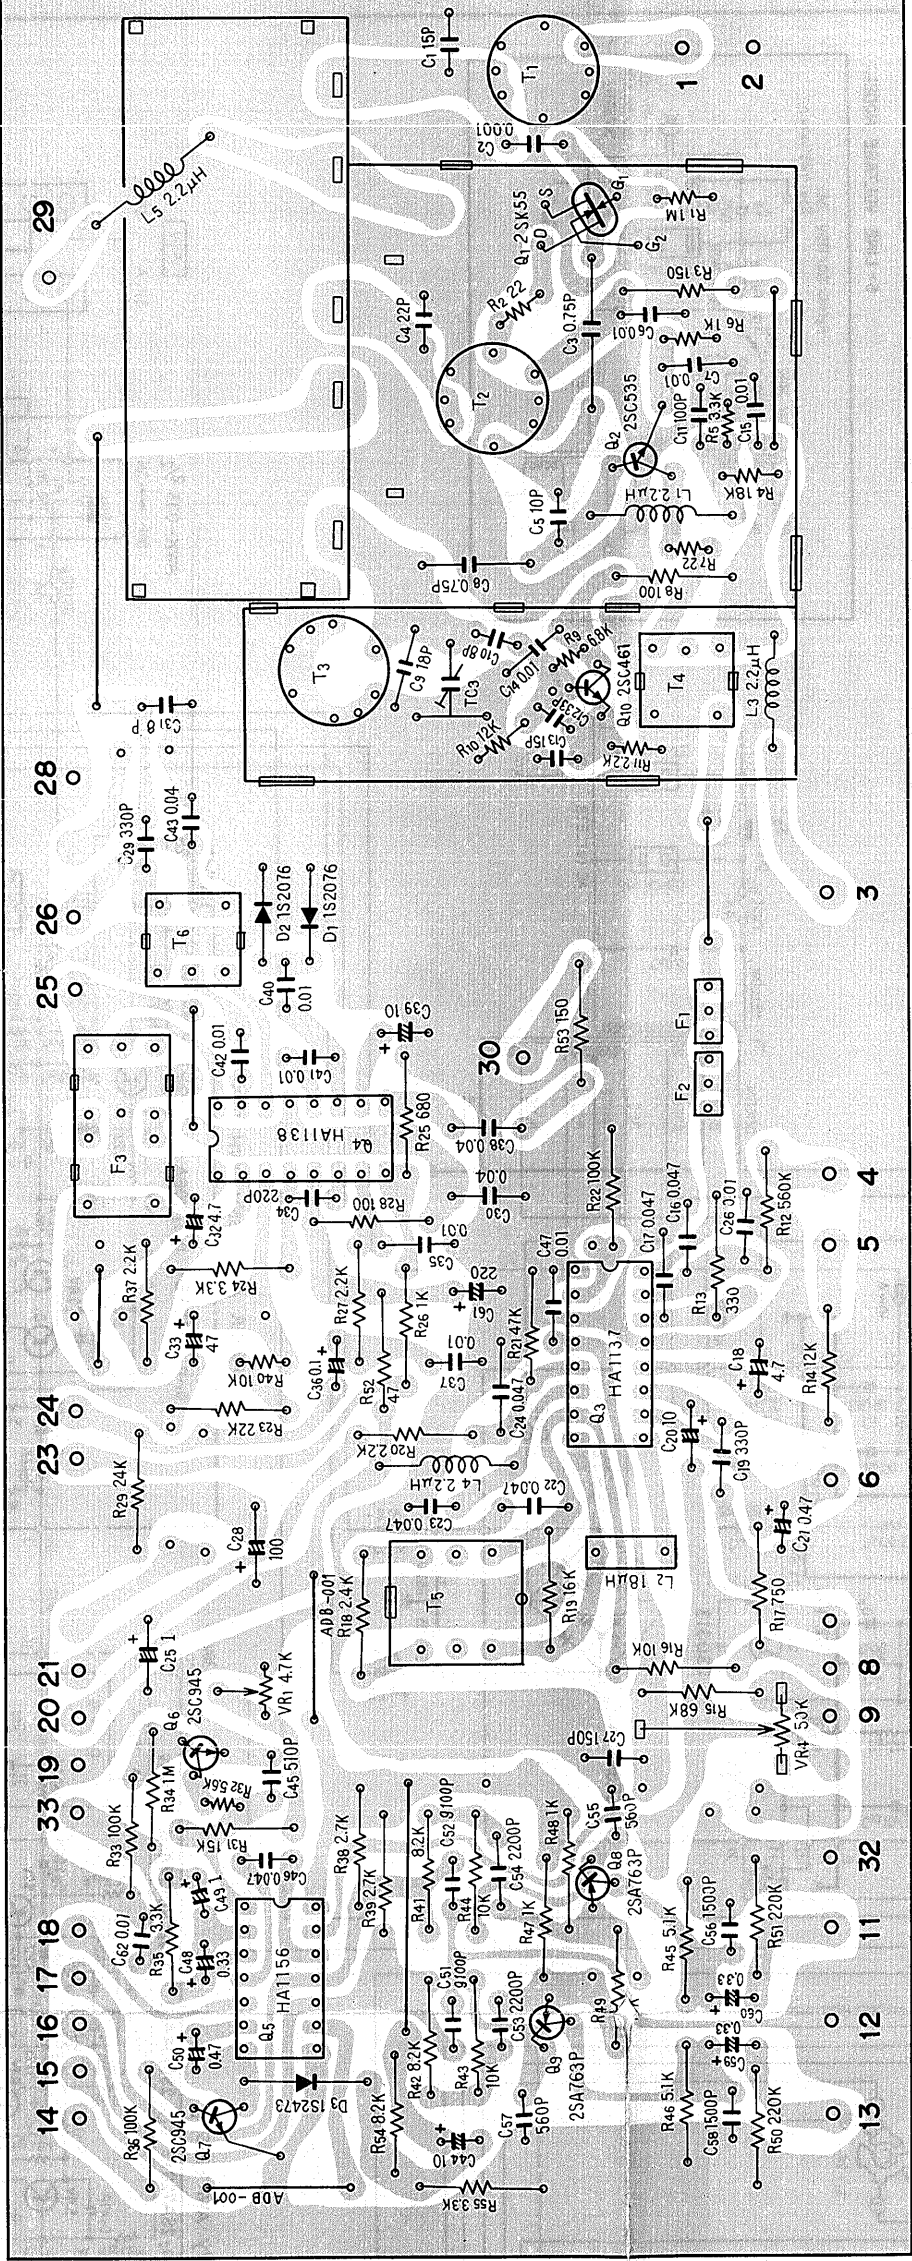


Equalizer amp ass'y AWF-014

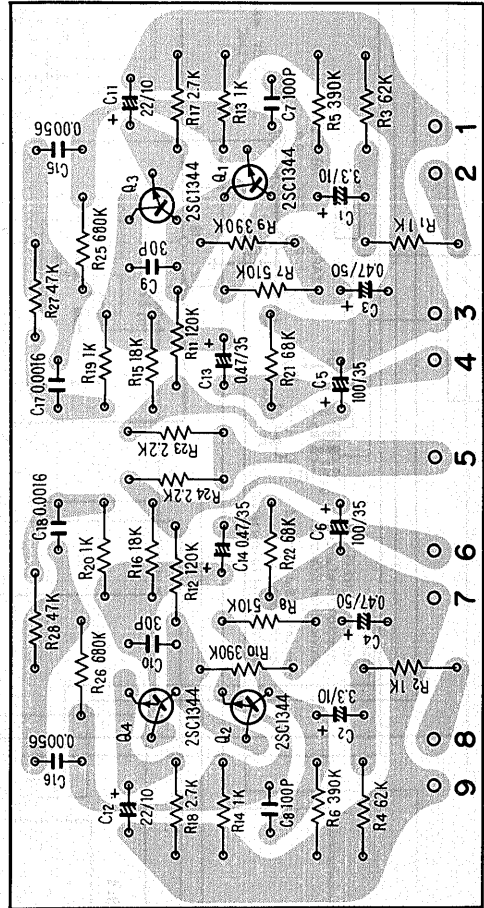


5P connector ass'y AWX-062




Power supply ass'y AWR-061 (GN model)

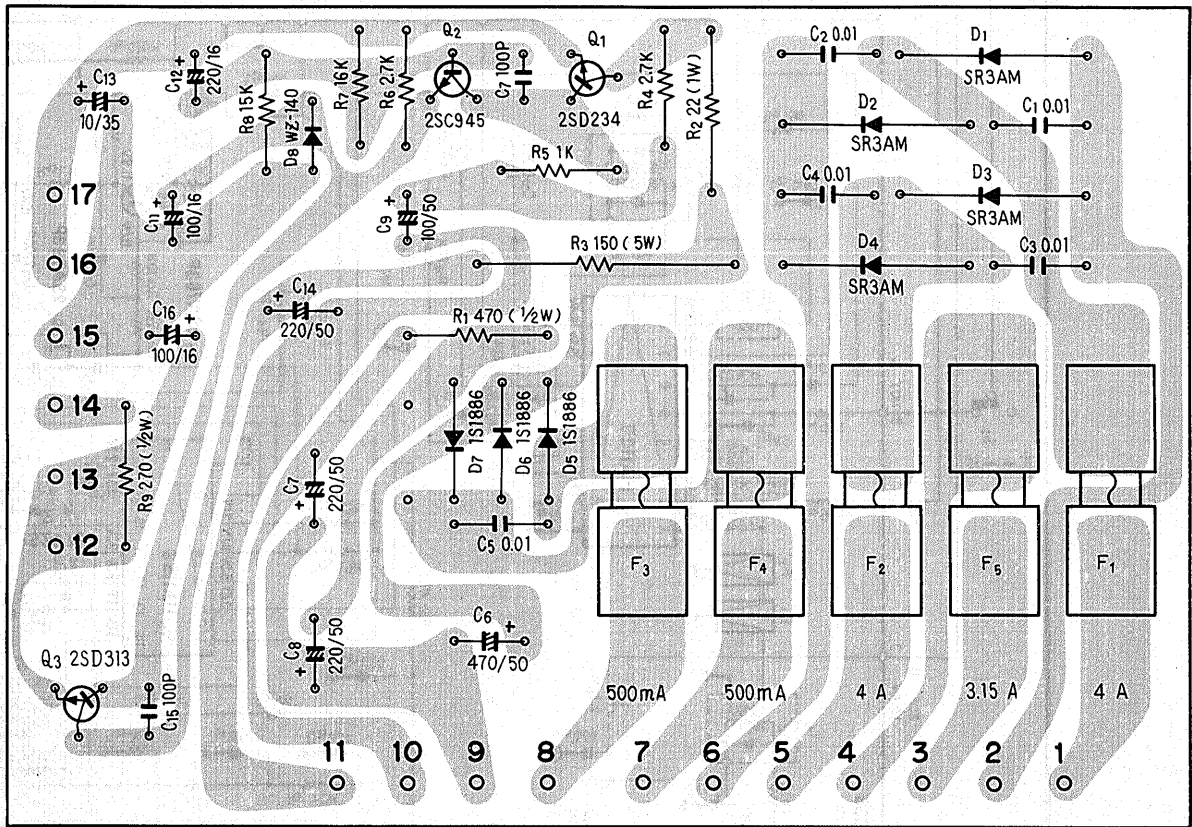

Power supply ass'y AWR-060 (FV, KCU model)

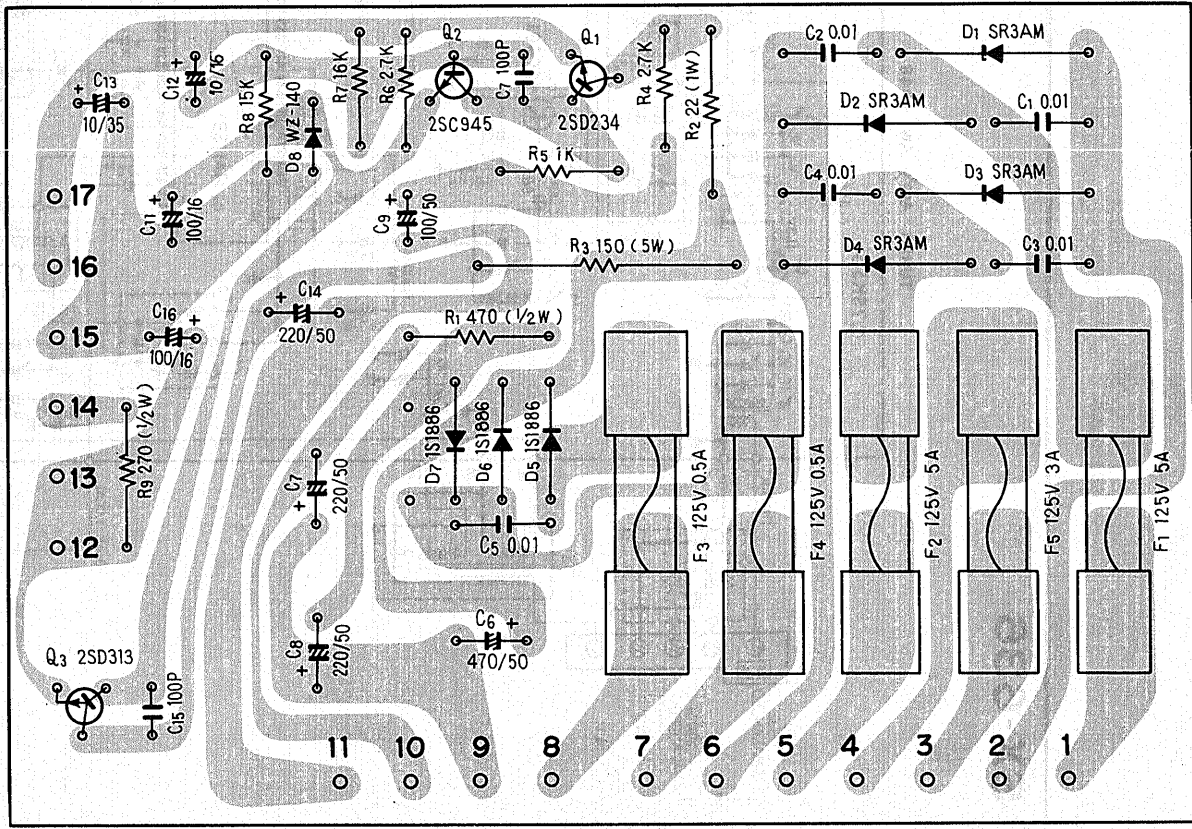

Power amp ass'y AWH-034

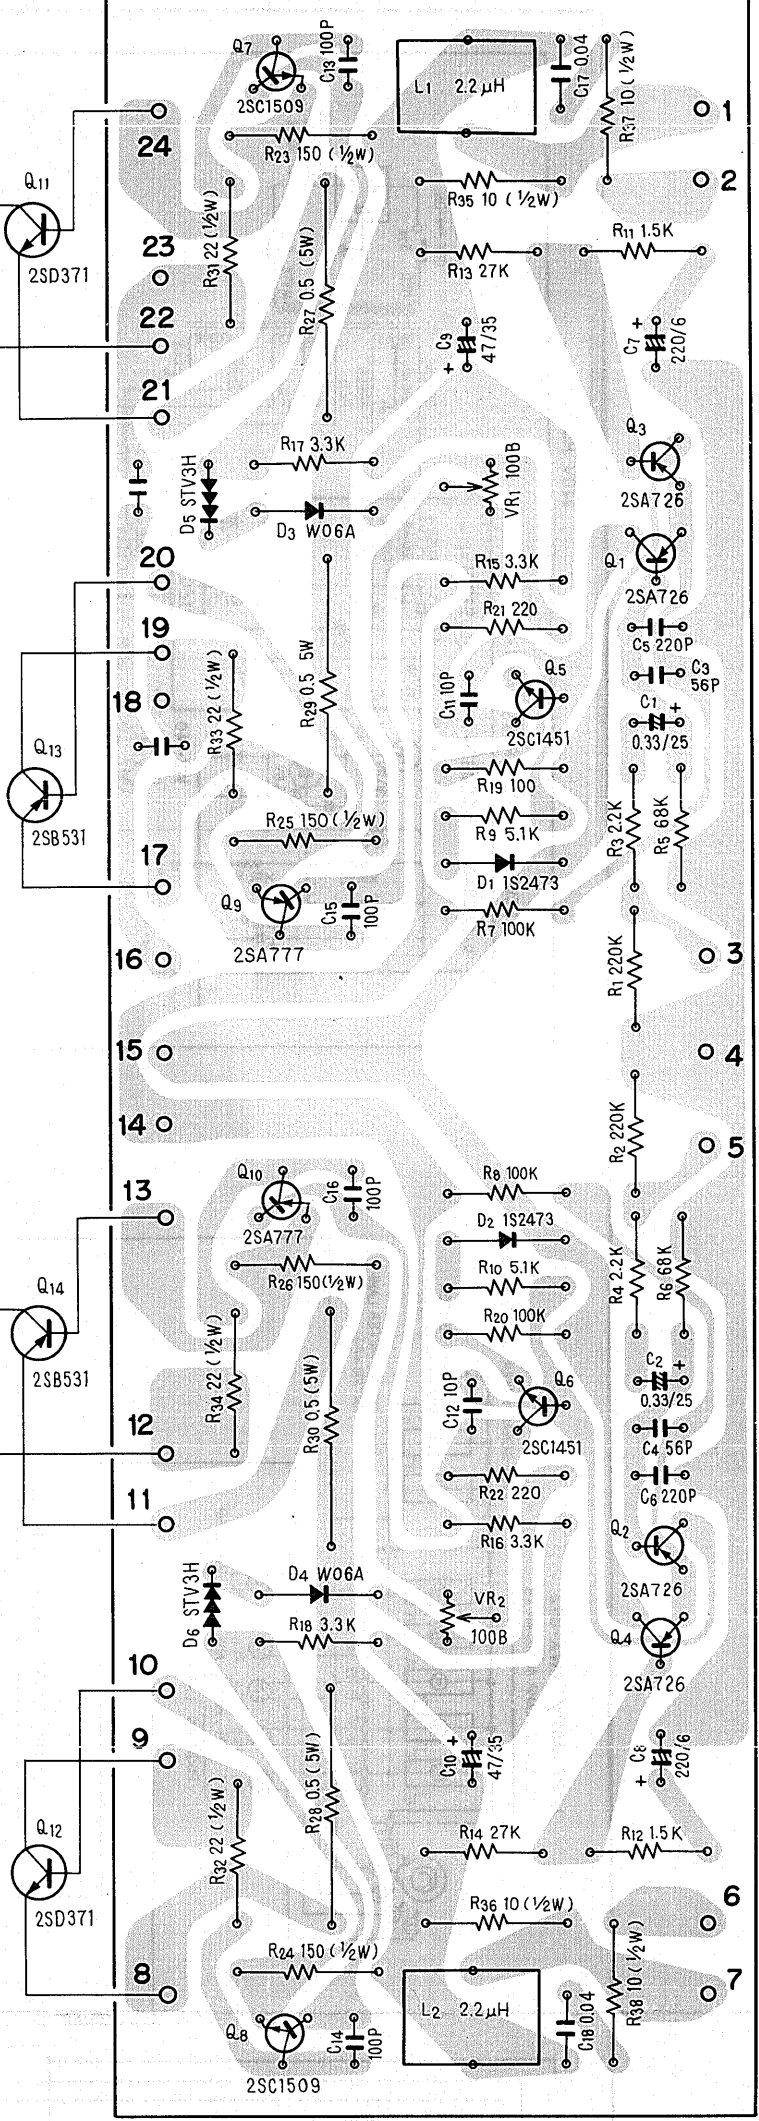


AM/FM STEREO RECEIVER

SX-636

FV GN KCU



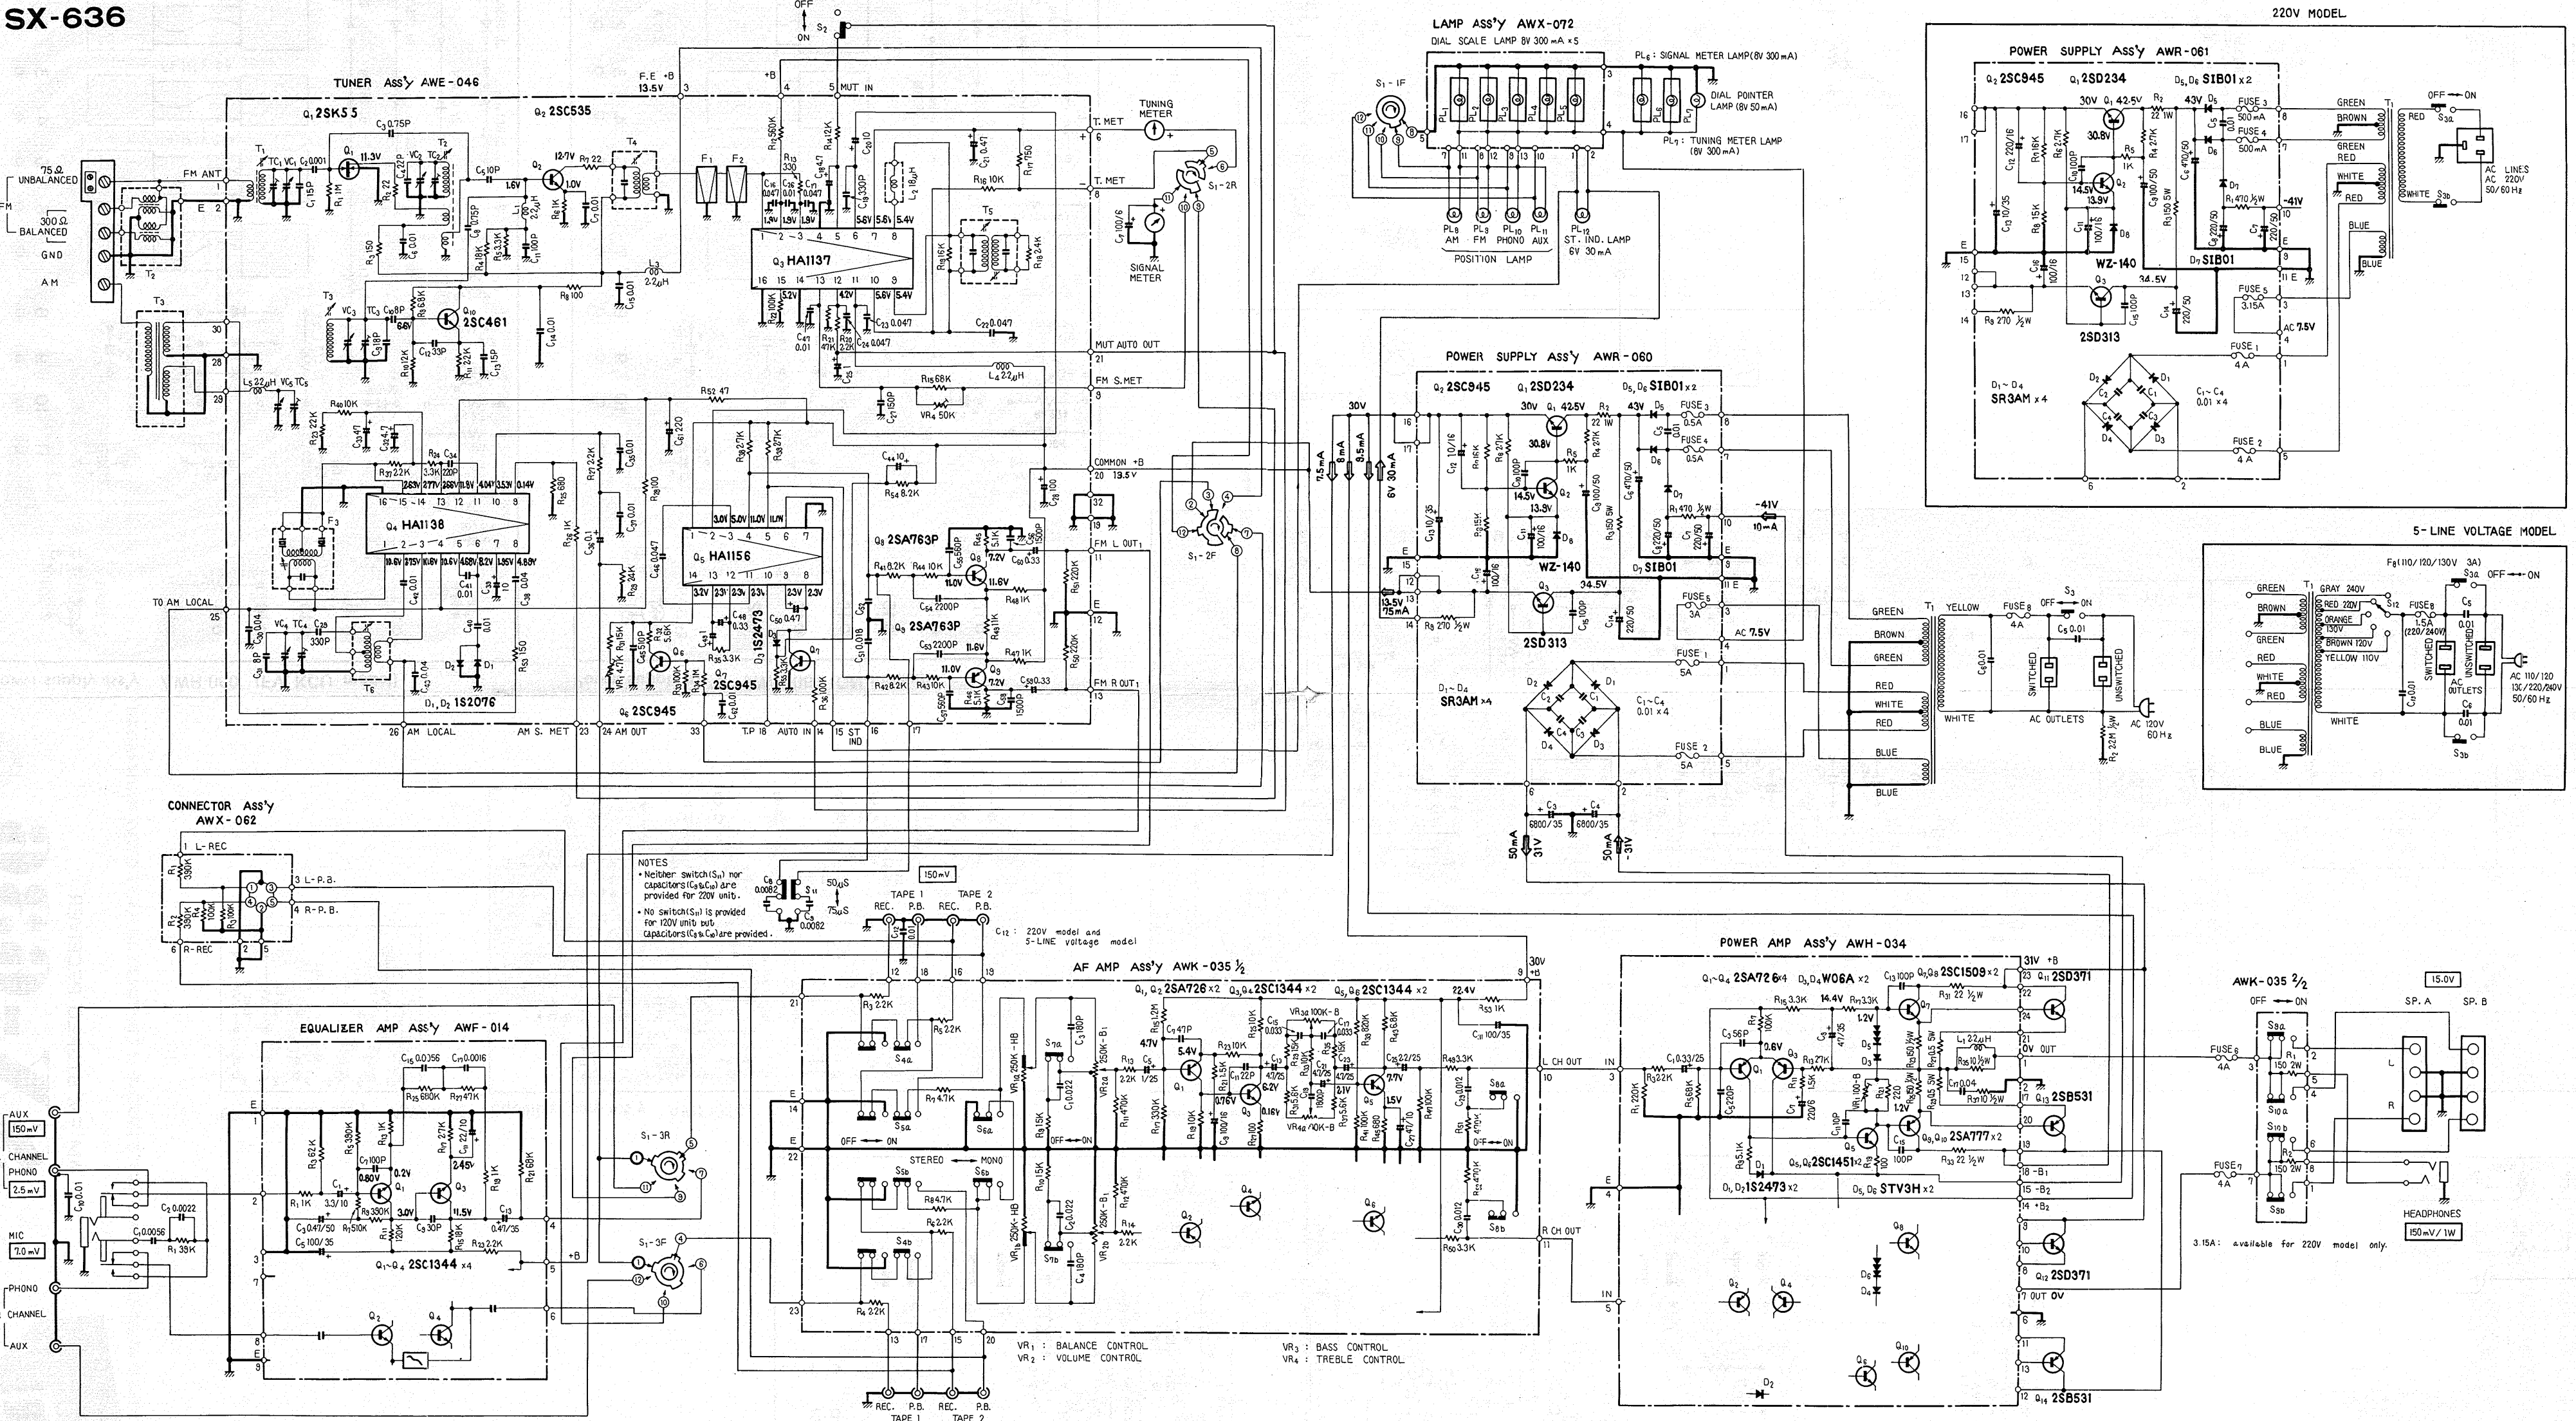

SWITCHES

S₁: FUNCTION
1. AM
2. FM
3. PHONO/MIC
4. AUX

S₂: FM MUTING
ON → OFF

S₃: POWER SWITCH
OFF → ON

S₄: TAPE MON 1
OFF → ON

S₅: TAPE MON 2
OFF → ON

S₆: MODE
STEREO → MONO

S₇: LOUDNESS
OFF → ON

S₈: HIGH FILTER
OFF → ON

S₉: SPEAKER A
OFF → ON

S₁₀: SPEAKER B
OFF → ON

S₁₁: DE-EMPHASIS
50μS → 75μS

RESISTORS
IN OHM, 1/4W, ±5% TOLERANCE UNLESS OTHERWISE NOTED. K = KΩ, M = MΩ.

CAPACITORS
IN μF UNLESS OTHERWISE NOTED. P = pF

NOTES

1. SIGNAL VOLTAGE NECESSARY FOR OBTAINING 28W/8Ω OUTPUT POWER (1KHz).

2. V: DC VOLTAGE AT NO INPUT SIGNAL.

3. A: DC CURRENT AT NO INPUT SIGNAL.