


RCA

RLG 22 Series

IF 455 KC

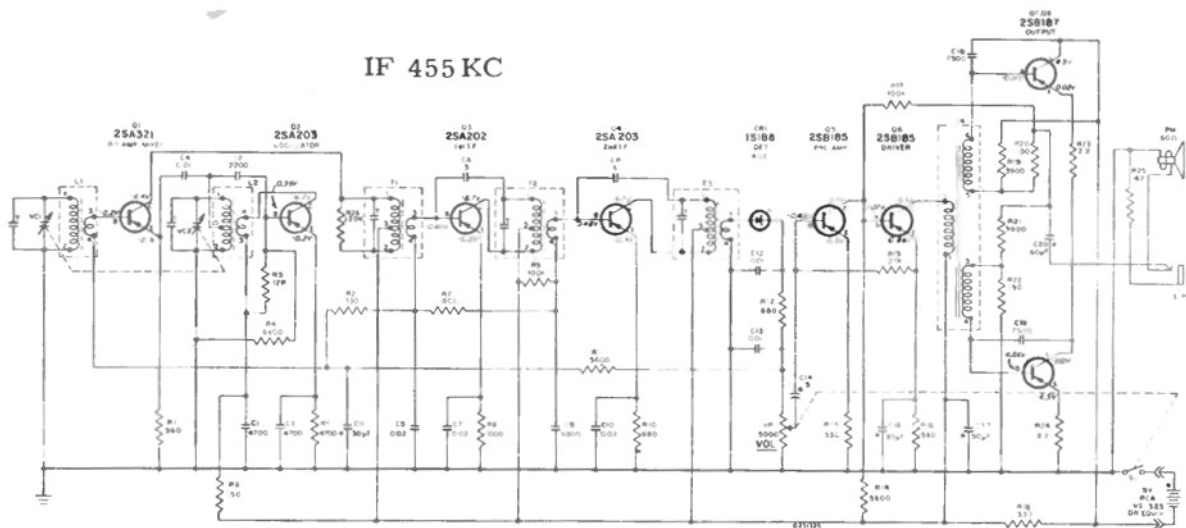


NOTES: 1. ALL RESISTANCES ARE 1/4WATT UNLESS NOTED OTHERWISE. VALUES ARE IN OHMS, K-1000.

2. ALL CAPACITANCE VALUES BELOW 10 ARE IN P.F., THOSE 10 AND ABOVE ARE IN M.F. UNLESS NOTED OTHERWISE.

3. VOLTAGES ARE MEASURED WITH A "VOLTOMYST" FROM (A) BATTERY AND SHOULD HOLD WITHIN $\pm 20\%$ WITH A NEW BATTERY. VOLUME CONTROL AT MINIMUM AND NO SIGNAL.

Schematic Diagram

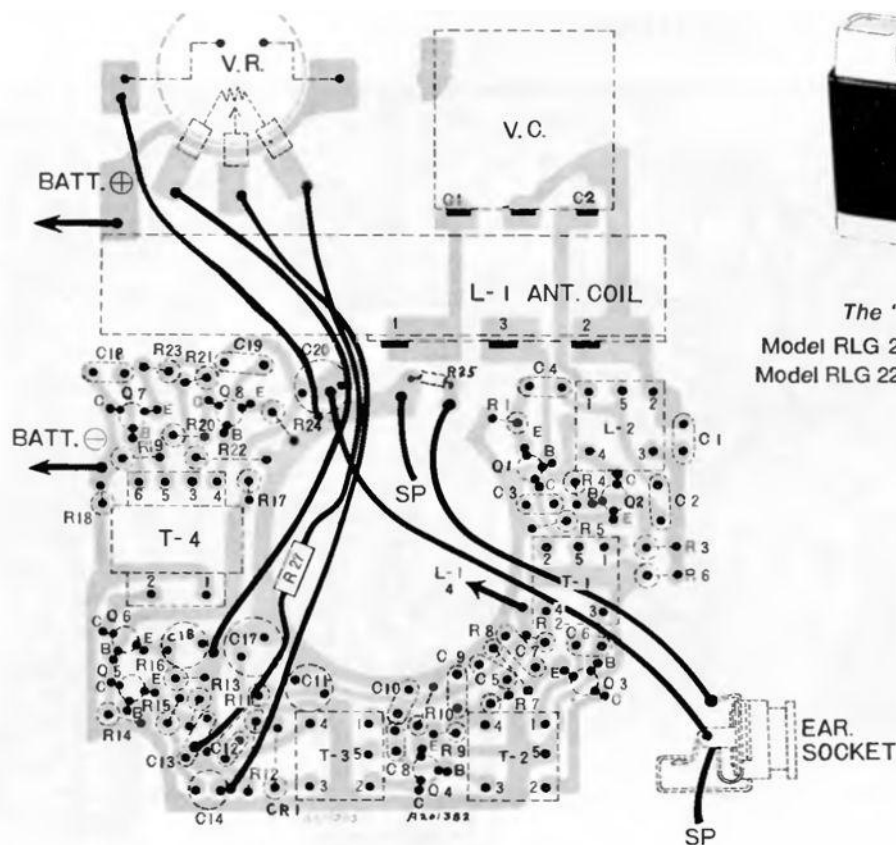

Component Location (Wiring View)



The "Rogue"

Model RLG 22A—Blue/White
Model RLG 22N—Maple/White