




RCA Models VJT 16, 18, 23, 24, 25, 29, 30, 31, 33, 35, 37, 84-K, 85-K, 89-K, 90-K,  
91-K Series

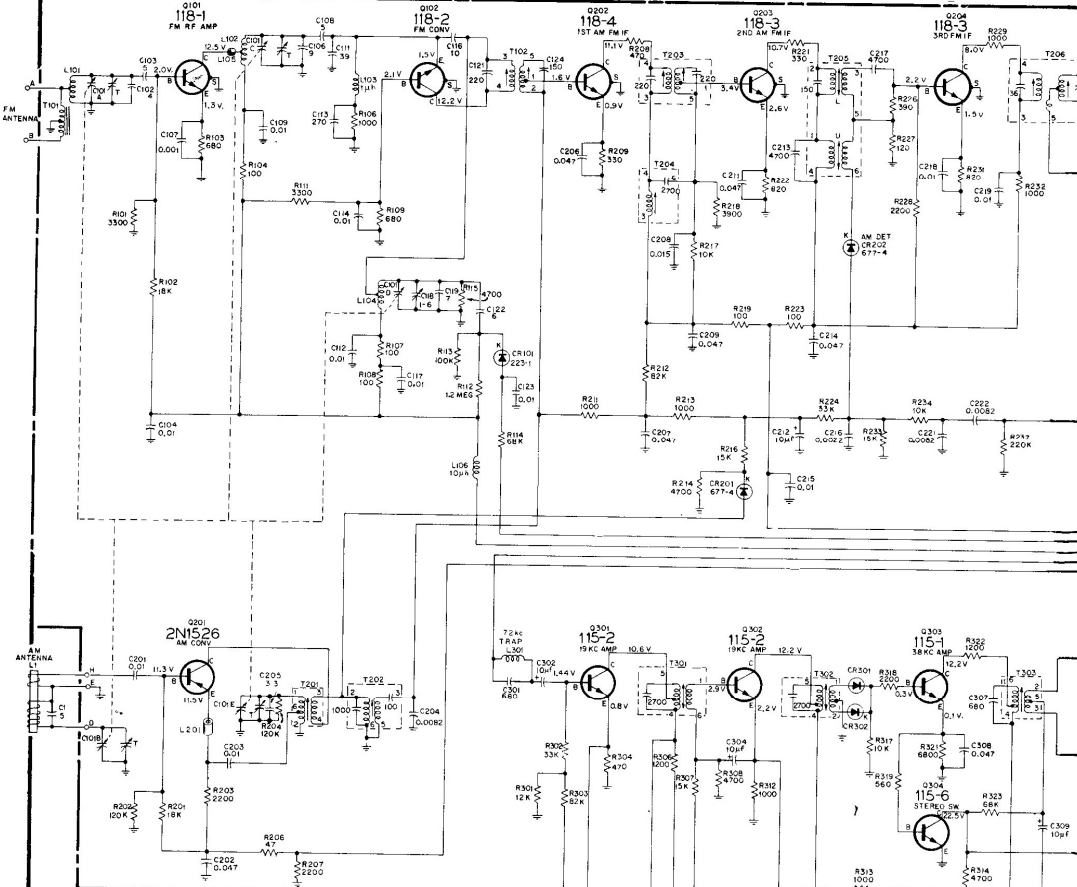

Chassis RC-1227C, E

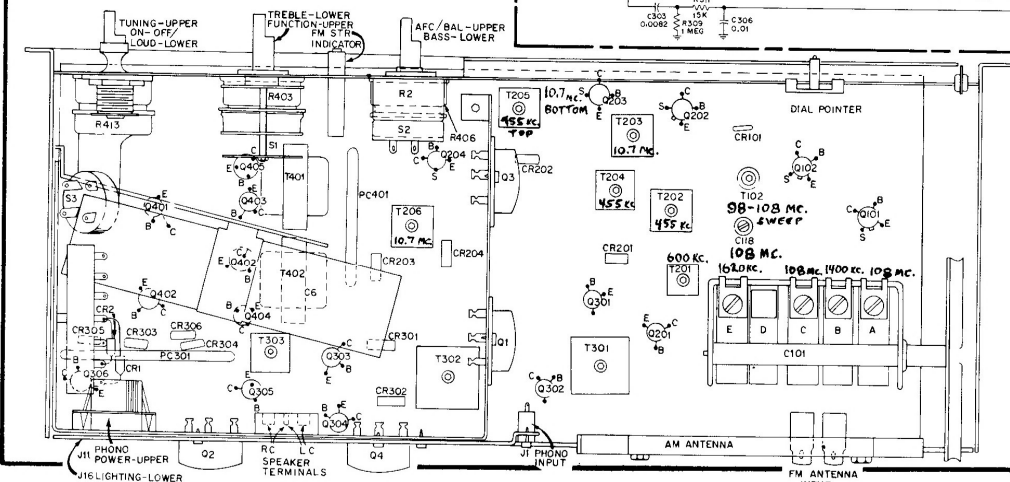


AM IF 455 KC  
FM IF 10.7 MC

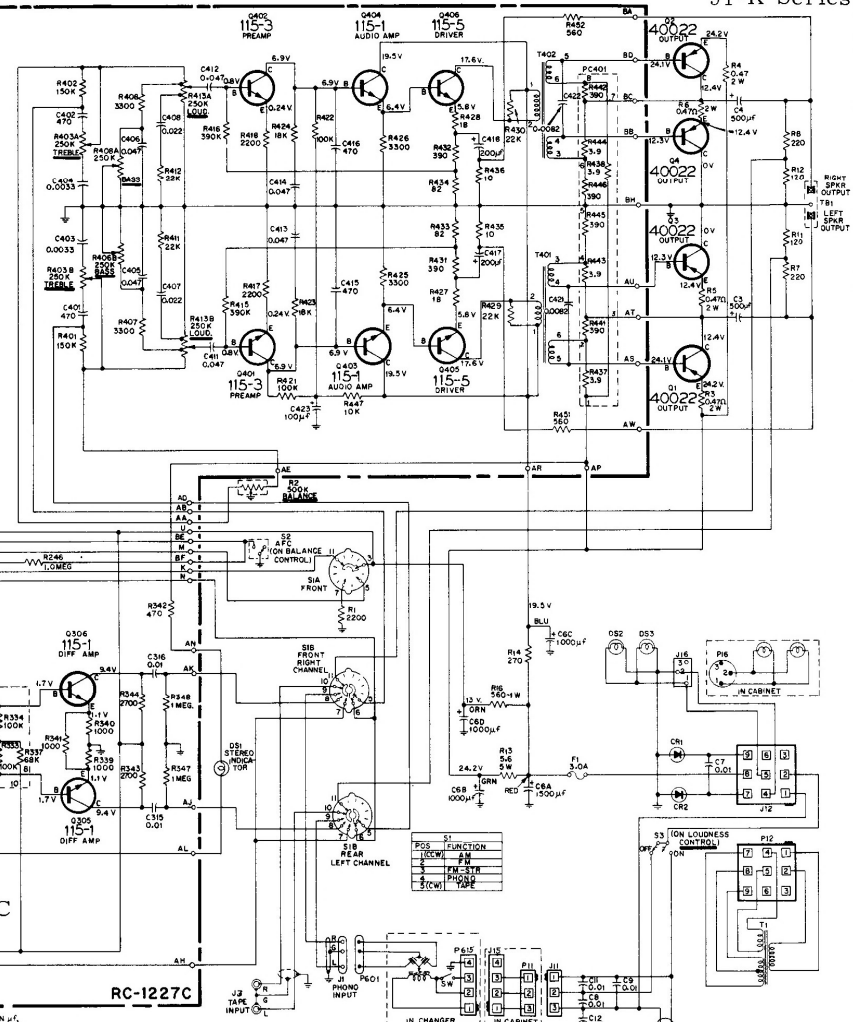

RC-1227C

ALL CAPACITOR VALUES LESS THAN 1.0 ARE IN P.F. VALUES 1.0 & ABOVE ARE IN M.F. EXCEPT AS NOTED.  
ALL RESISTOR VALUES IN OHMS. K=1000. ALL CONNECTORS SHOWN FROM WIRING SIDE.  
CONNECTOR PIN NUMBERS FOR REF ONLY.  
ALL SECTIONS OF SWITCH "S" ARE VIEWED FROM FRONT, WITH SWITCH IN EXTREME C.W. POSITION.  
ALL VOLTAGES MEASURED WITH A VOLT-OMMETER TO CHASSIS GROUND (B) WITH NO SIGNAL APPLIED. B SHOULD HOLD WITHIN 20% AT RATED LINE VOLTAGE.



FOR RC-1227C  
THE SCHEMATIC FOR RC-1227E IS THE SAME AS RC-1227C EXCEPT AS NOTED  
C411 & C412 0.0027  
R141 100  
R16 390  
R316 2200  
R342 330

RC-1227 Partial Chassis Layout, bottom view.