



SEARS, ROEBUCK and CO.

CHASSIS NO. 528.53580


Used in Models 2075, 2076, 2077
Chassis 528.54071 is similar and
is used in Models 1073, 1074,
1075, 1083, 1084, and 1085.

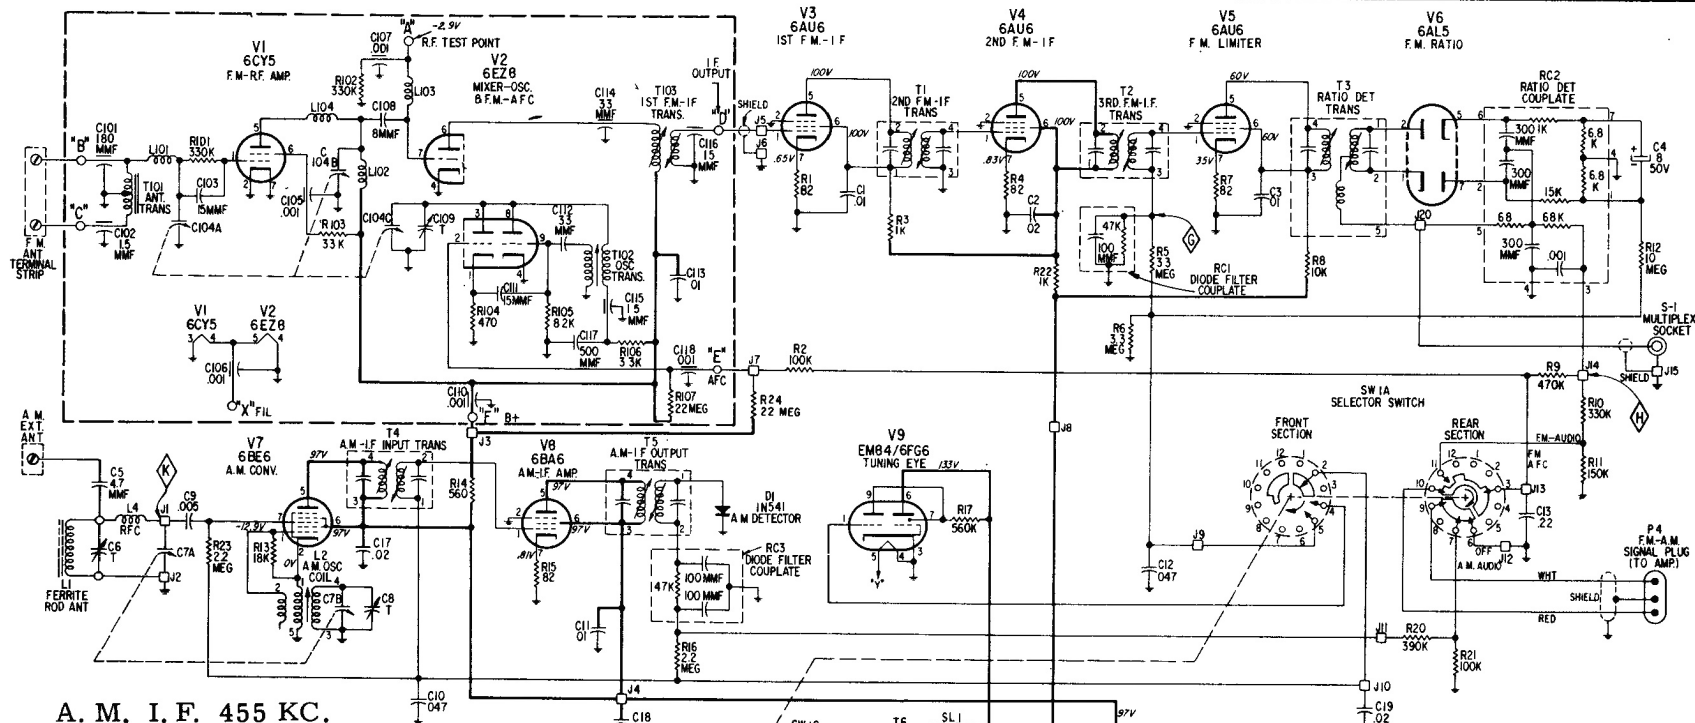

A. M. I. F. 455 KC.
F. M. I. F. 10.7 MC.

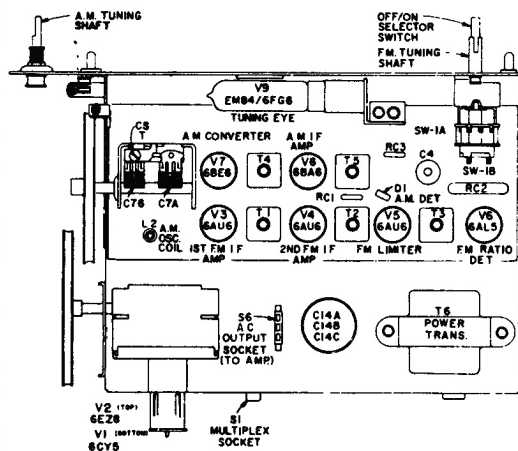

TUBE VIEW

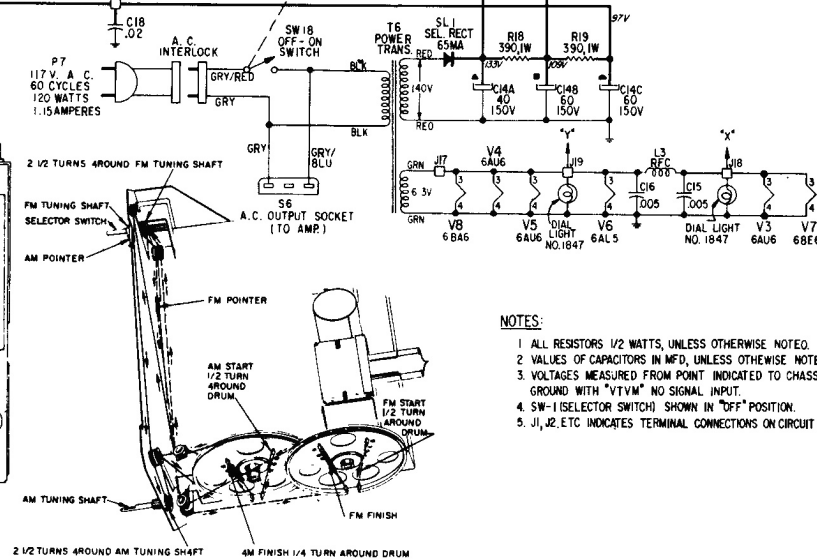

DIAL STRINGING

NOTES:

1. ALL RESISTORS 1/2 WATTS, UNLESS OTHERWISE NOTED.
2. VALUES OF CAPACITORS IN MFD, UNLESS OTHERWISE NOTED.
3. VOLTAGES MEASURED FROM POINT INDICATED TO CHASSIS GROUND WITH "VTVM" NO SIGNAL INPUT.
4. SW-1 (SELECTOR SWITCH) SHOWN IN "OFF" POSITION.
5. J1, J2, ETC INDICATES TERMINAL CONNECTIONS ON CIRCUIT BOARD.