




MODEL BP-110

NOTES

1. FREQ. RANGE MW 520-1650kHz
2. IF 455kHz
3. CAPACITANCE VALUES ARE IN MFD P:MMFD
4. RESISTANCE VALUES ARE IN OHMS K:1000
5. VOLTAGE READINGS TO COMMON GROUND(+) ARE MEASURED WITH V-T-V-M UNDER NO SIGNAL CONDITIONS




EARPHONE JACK

SP-1
SPEAKER


3VOLTS
BATTERIES

NO SIGNAL 13MA
MAX POWER 100MA




ON-OFF/VOLUME

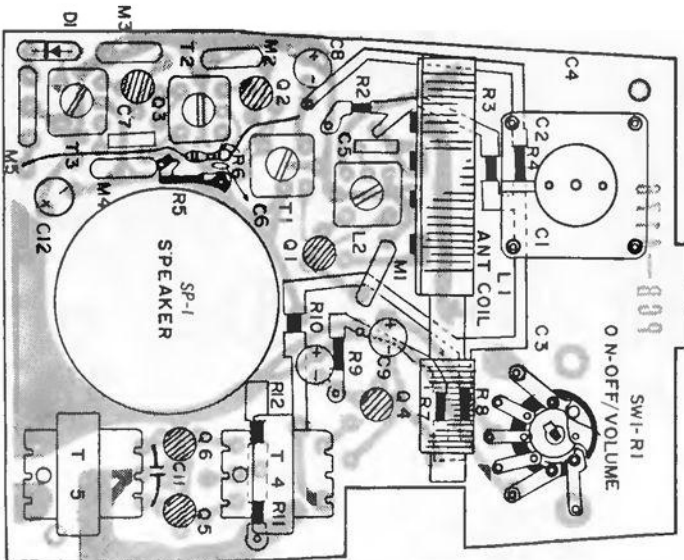

Component Side of Printed Circuit Board

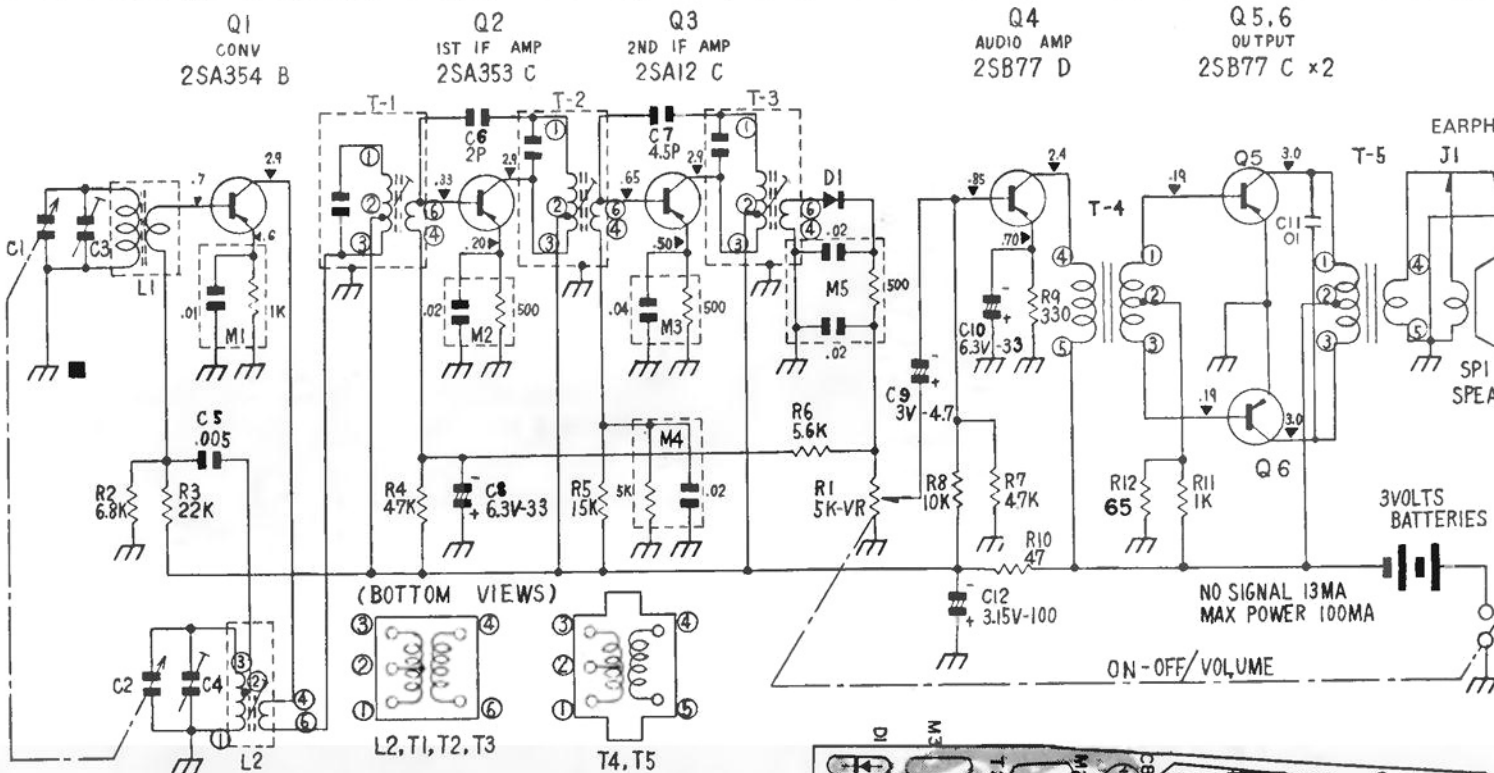

(BOTTOM VIEWS)

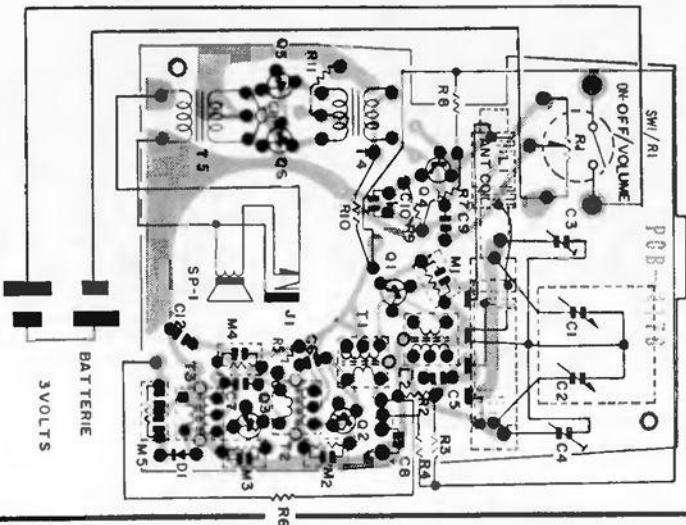

Wiring Side of Printed Circuit Board