

X1 2SA201

X2 2SC537



X3 2SC537

X4 2SB186



X5,6 2SB187

D1 IS426G

Th 23D27

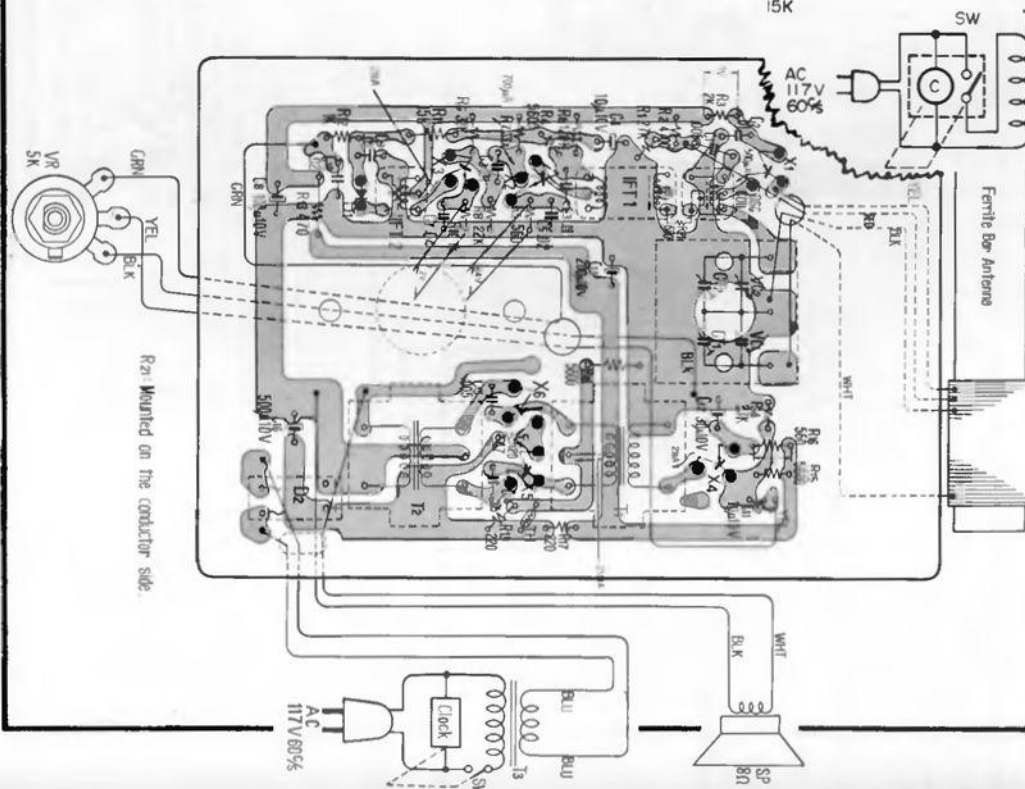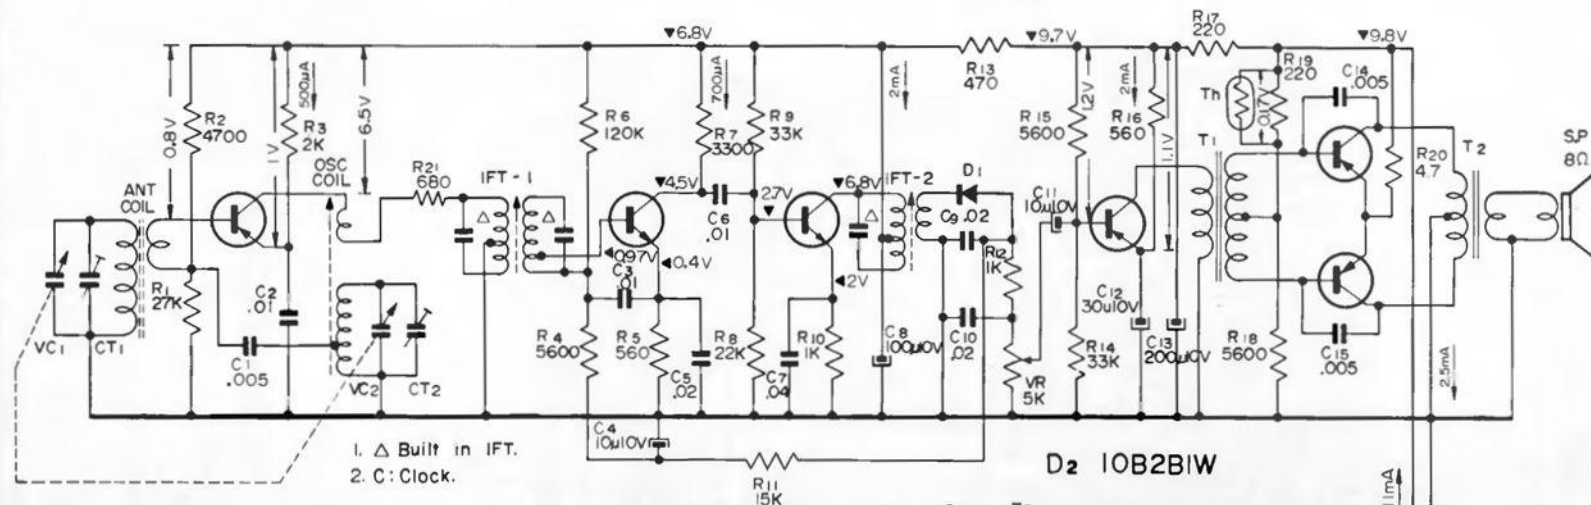

—Conductor Side—
Mounting Diagram



Antenna System: Built-in Ferrite Bar Antenna
Intermediate Frequency: 455 Kc
Maximum Sensitivity: 100 μ V/m
(at 50mW output)

Selectivity: 20 dB at 10 Kc off resonance, at 1,400 Kc
Power Output: 300 mW (undistorted)
450 mW (maximum)

Speaker: 2½" (60mm) PM dynamic, impedance 8Ω
Power Requirement: AC 110~120V, 60 c/s, 5 W

SONY

6RC-23