

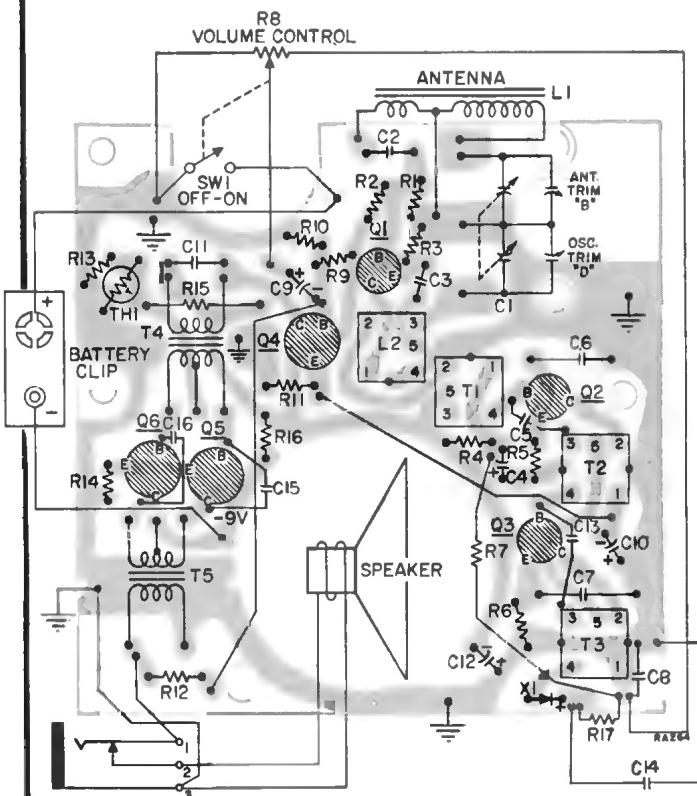


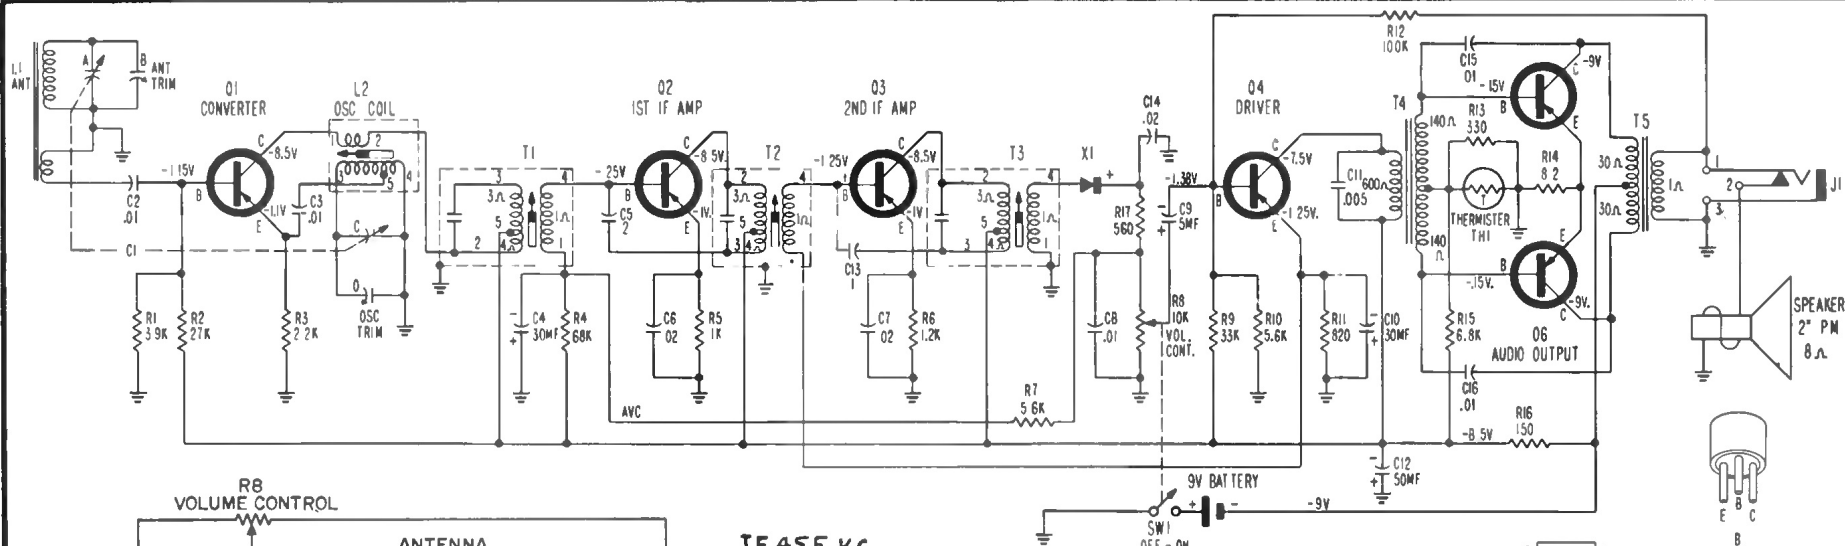

Bottom View of
PC Board Showing Top
Components in Solid Outline.

IF 455 Kc.

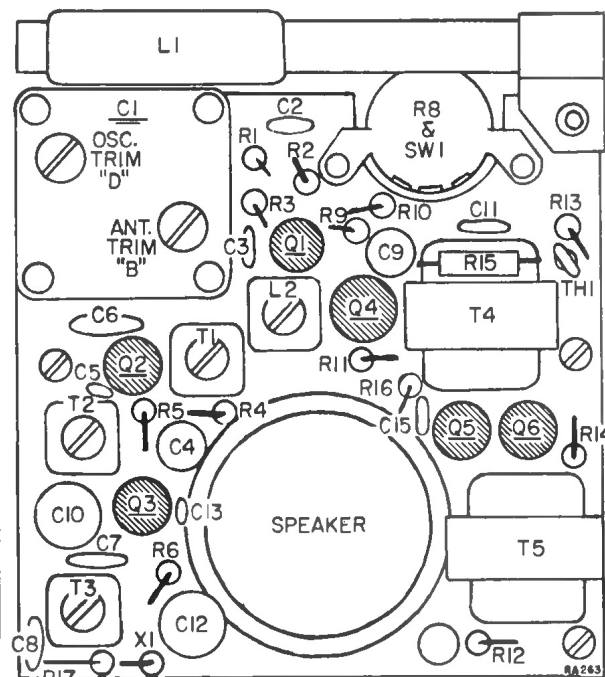

NOTE:
C14, C16 & R7 MOUNTED ON OPPOSITE SIDE. (SEE BOTTOM VIEW)

NOTES:

- 1 VOLTAGE MEASUREMENTS MADE WITH VTVM FROM POINTS INDICATED TO GROUND, VOLUME CONTROL AT MINIMUM.
- 2 UNLESS OTHERWISE INDICATED, ALL CAPACITANCE VALUES LESS THAN ONE ARE IN MF AND VALUES GREATER THAN ONE ARE IN PF (PICO FARADS), ALL RESISTANCE VALUES ARE IN OHMS, 1/2 WATT
- 3 DURING SERVICING, TOTAL BATTERY CURRENT SHOULD BE METERED WITH NO SIGNAL, AND VOLUME CONTROL AT MINIMUM, TOTAL BATTERY DRAIN SHOULD BE 6.6 MA. APPROX

TRANSISTOR COMPLEMENT

	FUNCTION	TYPE	W PART NUMBER	ALTERNATES
Q1	CONVERTER	PNP	690V056H89	
Q2	1ST IF AMP	PNP	690V056H89	
Q3	2ND IF AMP	PNP	690V056H89	
Q4	DRIVER	PNP	690V056H90	
Q5, Q6	AUDIO OUTPUT	PNP	690V056H90	

•-MATCHED PAIR

Westinghouse

H-707P6GPA

CHASSIS V-2461-2