



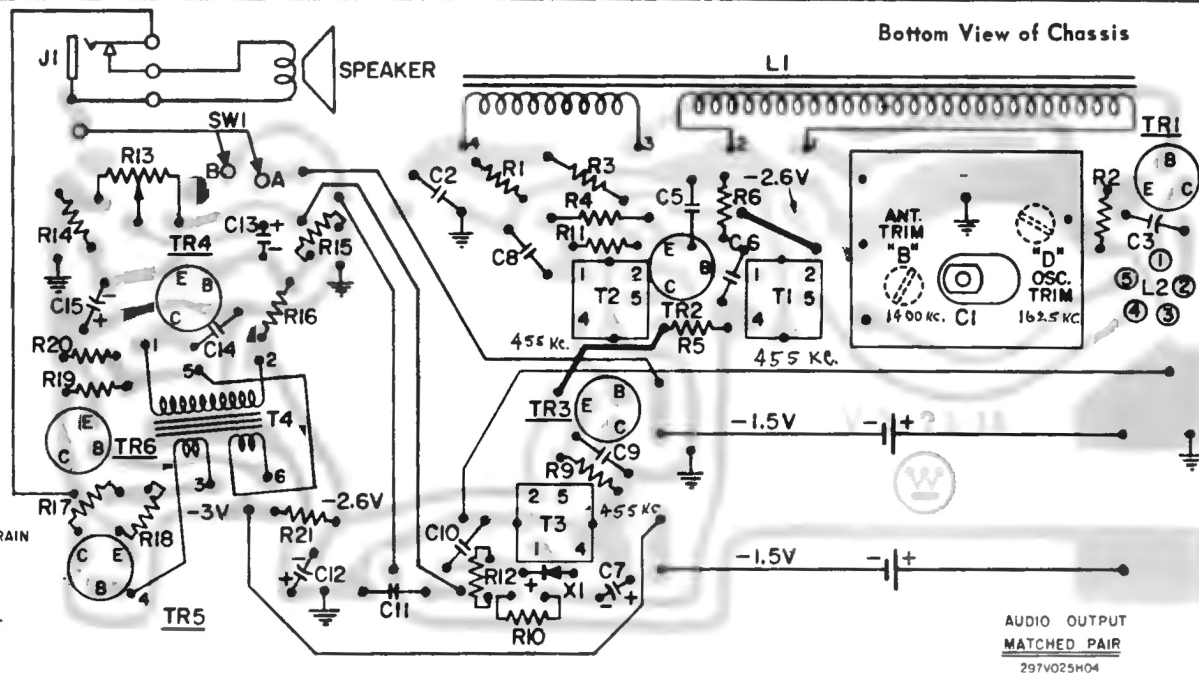

1. DURING SERVICING, BATTERY DRAIN SHOULD BE METERED, WITH NO SIGNAL AND VOL. CONT. AT MINIMUM. CURRENT DRAIN AT POINT SHOWN SHOULD BE 13 MA. APPROX.
2. ALL CAPACITANCE VALUES LESS THAN 1 ARE IN MFD. AND ALL RESISTANCE VALUES ARE IN OHMS 1/2 WATT UNLESS OTHERWISE INDICATED.
3. VOLTAGE MEASUREMENTS MADE WITH A V.T.V.M. FROM POINTS INDICATED TO GND. WITH TUNING CAPACITOR AT MAX. VOLUME CONTROL AT MIN. (NO SIGNAL INPUT) BATTERY SOURCE AT 3 VOLTS.

* EARLY PRODUCTION 82 OHMS.

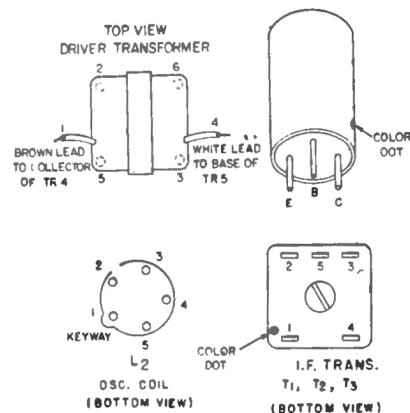