
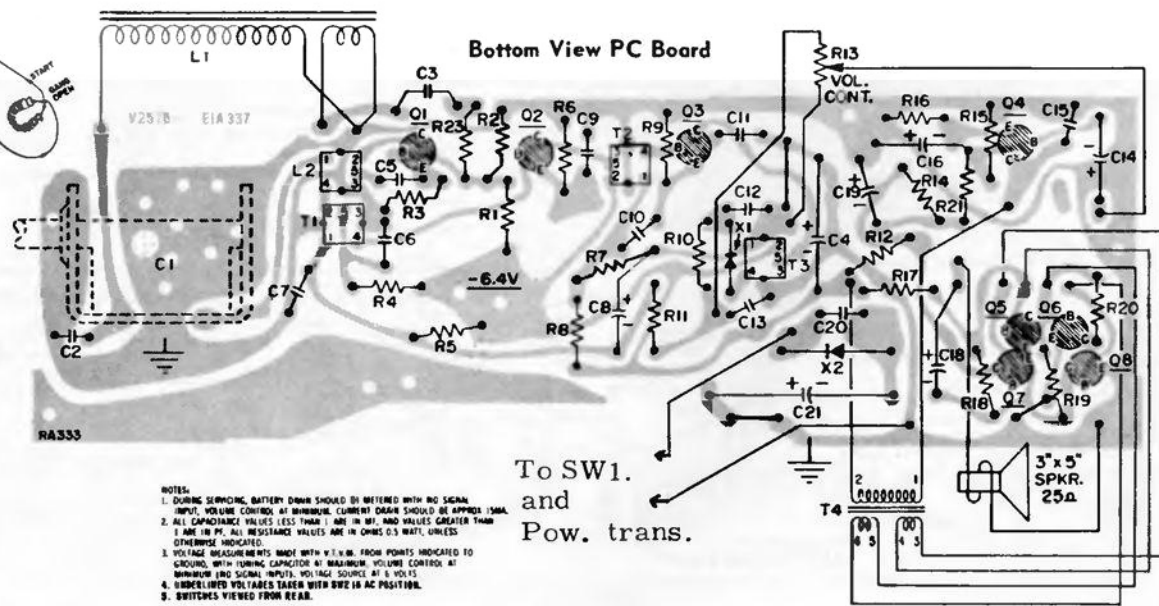
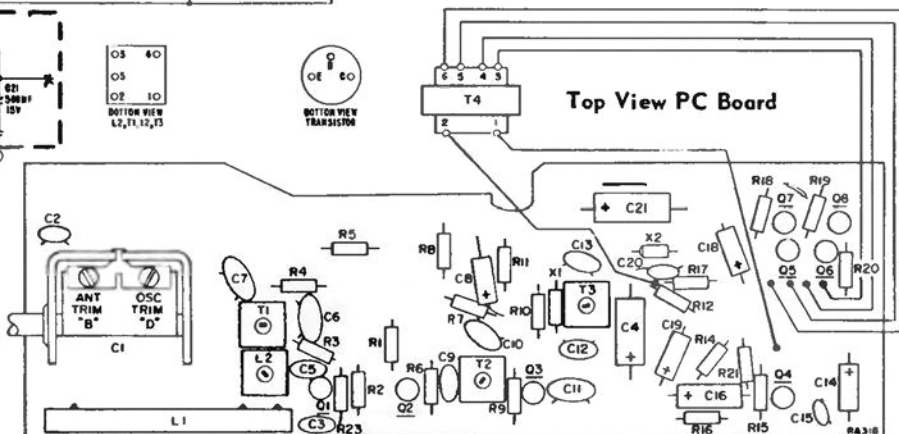
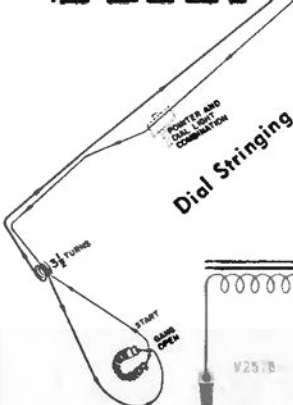
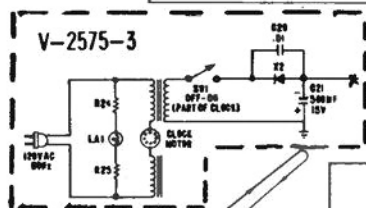


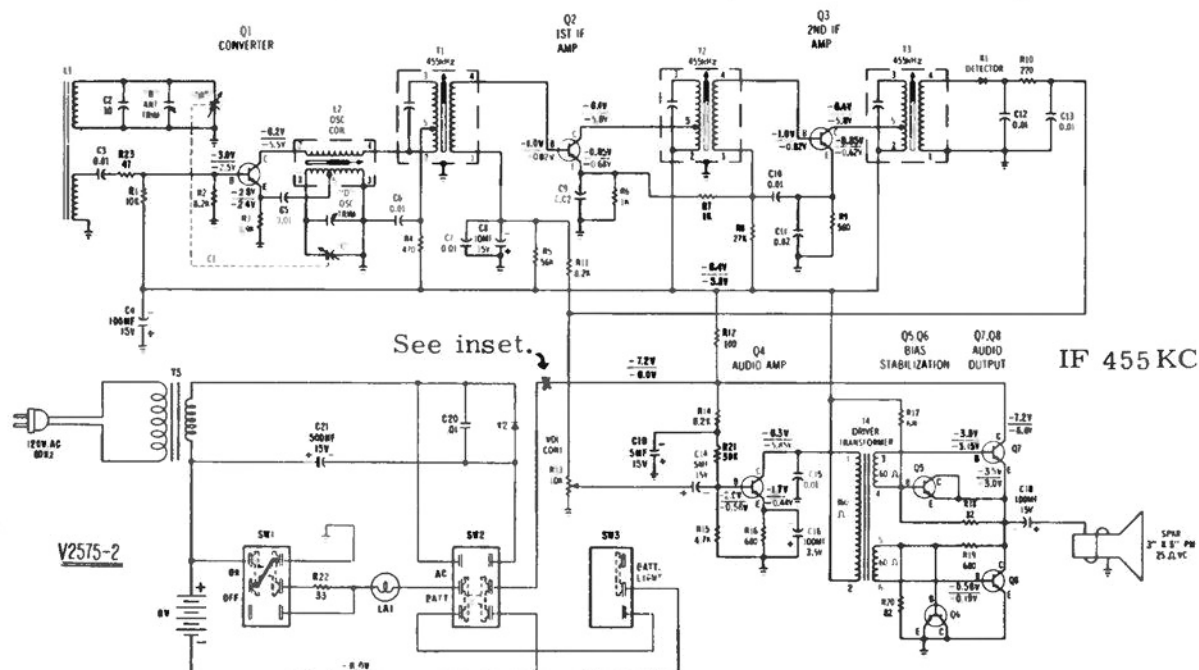

- NOTES:
1. DURING SERVICING, BATTERY DOWN SHOULD BE METERED WITH NO SIGNAL INPUT. VOLUME CONTROL AT MINIMUM. CURRENT DRAIN SHOULD BE APPROX. 15MA.
 2. ALL CAPACITANCE VALUES LESS THAN 1 μF IN μF, AND VALUES GREATER THAN 1 μF IN μF. ALL RESISTANCE VALUES ARE IN OHMS UNLESS OTHERWISE INDICATED.
 3. VOLTAGE MEASUREMENTS MADE WITH V.T.M. FROM POINTS INDICATED TO GROUND, WITH TUNING CAPACITOR AT MAXIMUM. VOLUME CONTROL AT MINIMUM (NO SIGNAL INPUT). VOLTAGE SOURCE AT 6 VOLTS.
 4. UNDEVELOPED VOLTAGES TAKEN WITH SW2 IN AC POSITION.
 5. SWITCHES VIEWED FROM REAR.

To SW1.
and
Pow. trans.