
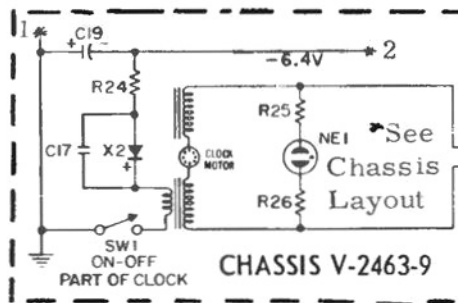




WESTINGHOUSE Models RLA1160A, 1161A; Chassis V-2463-9
Models RS31M08A, M38A, M78A; Chassis V-2463-8

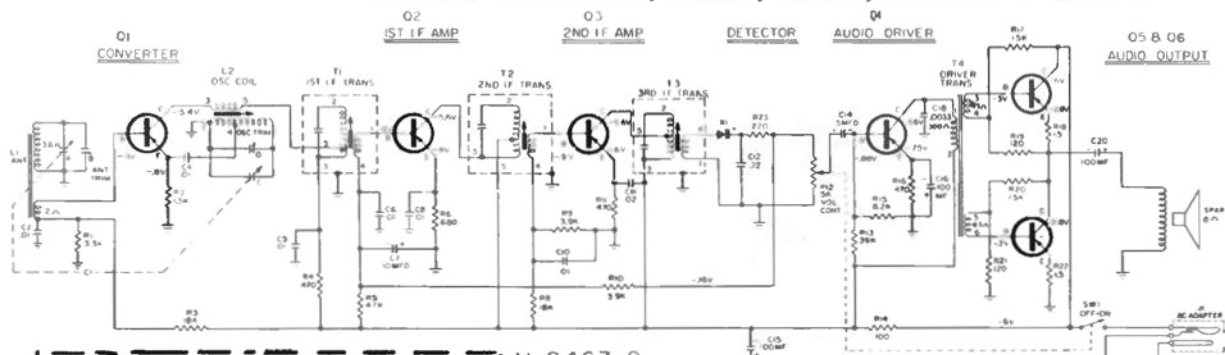

TRANSISTOR COMPLEMENT			
FUNCTION	TYPE	W PART NO	ALTERNATE
CONVERTER	PNP	29TVD535H01	
1ST IF	PNP	29TVD534H01	
2ND IF	PNP	29TVD534H02	
AUDIO DRIVER	PNP	29TVD532H01	
AUDIO OUTPUT	PNP	29TVD535H01	●

TRANSISTOR COMPONENT		
FUNCTION	TYPE	I-242, J-9
		M-P42, J-10
CONVERTER	PNP	2N7055C01
(S1) J3	PNP	2N7055A02
ZND J3	PNP	2N7055A02
AUDIO DRIVER	PNP	2N7055A02
AUDIO OUTPUT	PNP	2N7055A02



● MATCHED PAIR

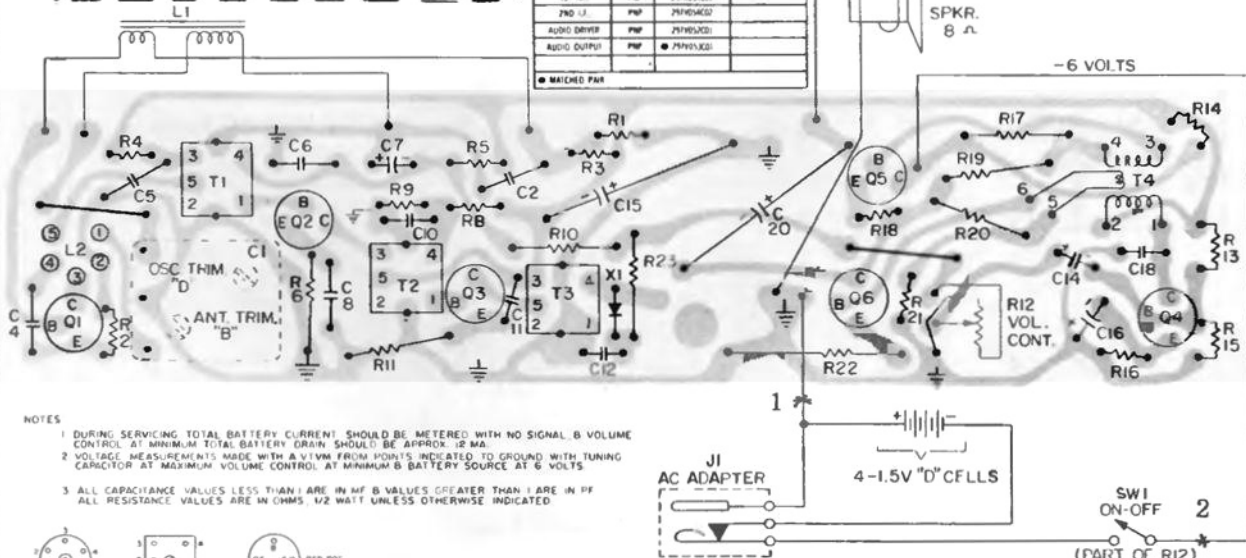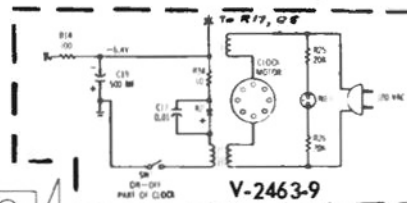

- NOTES
- 1 DURING MEASURING TOTAL BATTERY CURRENT SHOULD BE MEASURED WITH NO SIGNAL. B VOLUME CONTROL AT MINIMUM TOTAL BATTERY DRAIN SHOULD BE APPROX. 12 MA.
 - 2 VOLTAGE MEASUREMENTS MADE WITH A VOM FROM POINTS INDICATED. TO GROUND WITH TUNING CAPACITOR AT MAXIMUM VOLUME CONTROL AT MINIMUM B BATTERY SOURCE AT 6 VOLTS.
 - 3 ALL CAPACITANCE VALUES LESS THAN 1 ARE IN PF. B VALUES GREATER THAN 1 ARE IN PF. ALL RESISTANCE VALUES ARE IN OHMS. 1/2 WATT UNLESS OTHERWISE INDICATED.



BOTTOM VIEW
ON Q2 Q3



IF 455 KC

