




121-256
R.F.

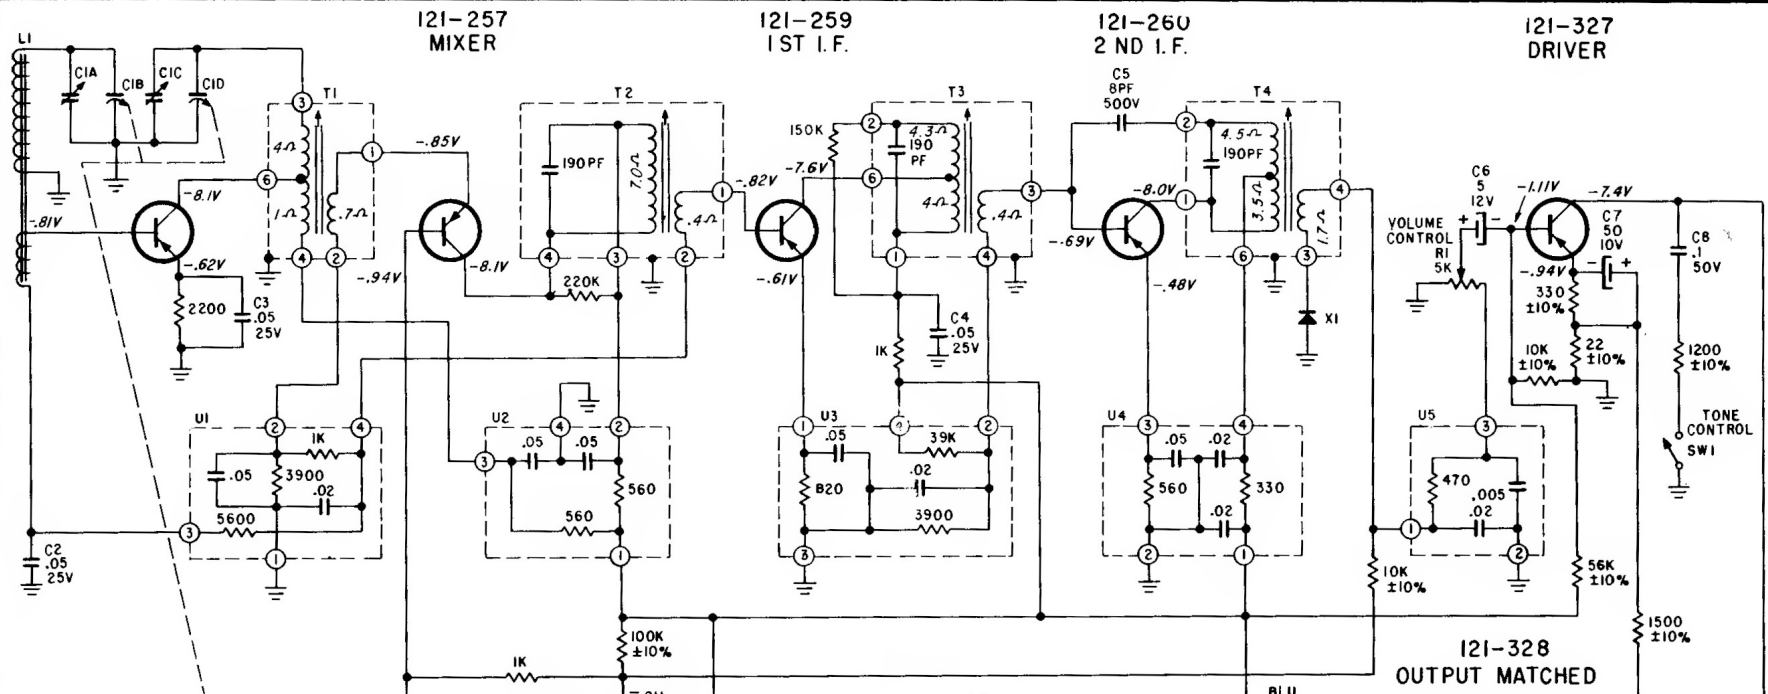


NOTES:
ALL RESISTORS ARE 1/2 WATT, CARBON, $\pm 20\%$ TOLERANCE UNLESS OTHERWISE SPECIFIED.
ALL VOLTAGES ARE D.C. UNLESS OTHERWISE SPECIFIED.
ALL CONDENSERS ARE IN MICROFARADS UNLESS OTHERWISE SPECIFIED.
D.C. VOLTAGES SHOWN ARE MEASURED WITH NO SIGNAL PRESENT USING A VACUUM TUBE VOLTMETER OF 11 MEGOHMS INPUT RESISTANCE.

⊕ DENOTES CHASSIS

BATTERY CURRENT DRAIN APPROXIMATELY 17.5 MA. WITH 121-258 OSC.
SPEAKER IMPEDANCE 3-2 Ω AT 400 CPS.





IF 455 KC.



DIAL CORD DRIVE
SHOWN IN FULL COUNTERCLOCKWISE POSITION

3/4 TURN

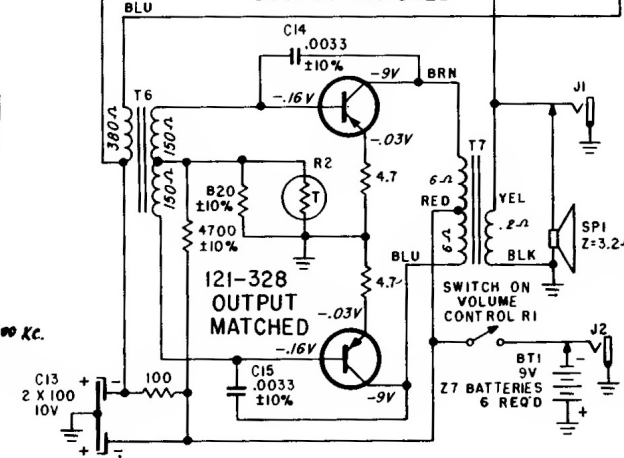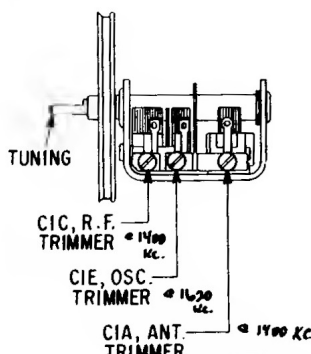

ZENITH RADIO
Model "Royal 755M"
Chassis 8MT41Z2

ZENITH RADIO Model "Royal 755M" Chassis 8MT41Z2