JBL Incorporated, 8500 Balboa Boulevard, P.O. Box 2200, Northridge, California 91329 U.S.A.

Technical Manual

JBL2226G/H/J

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

• Nominal Impedance:	4 ohm (G) 8 ohm (H) 16 ohm (J)
• Power Capacity:	600W AES Continuous Pink Noise
• Frequency Range:	30 Hz to 2.5 kHz
• Sensitivity:	97 dB SPL*
• Crossover Frequencies:	N/A

SYSTEM COMPONENTS:

• Cabinet:	N/A
• Grille:	N/A
• Low Frequency Transducer:	380mm (15 in.) Cone Transducer (2226G/H/J)

*1 Watt (2.83 V RMS) @ 1 Meter

SYSTEM COMPONENTS: *(cont'd)*

• DC Resistance:	2.5 ohm ±10% Aluminum Wire (G) 5.0 ohm ±10% Aluminum Wire (H) 9.7 ohm ±10% Aluminum Wire (J)

AURAL SWEEP TEST SPECIFICATIONS:

A. L.F. Aural Sweep Test:	10.0V Input, 20 Hz to 1.2 kHz


PHYSICAL SPECIFICATIONS:

• Enclosure Dimensions:	388mm x 388mm x 137mm D (15.26 x 15.26 x 5.5 in. D)
• Shipping Weight:	21.5 lbs. (9.8 kg)


WARRANTY INFORMATION:

- Refer to the Warranty Statement packed with each product.

PACKAGE

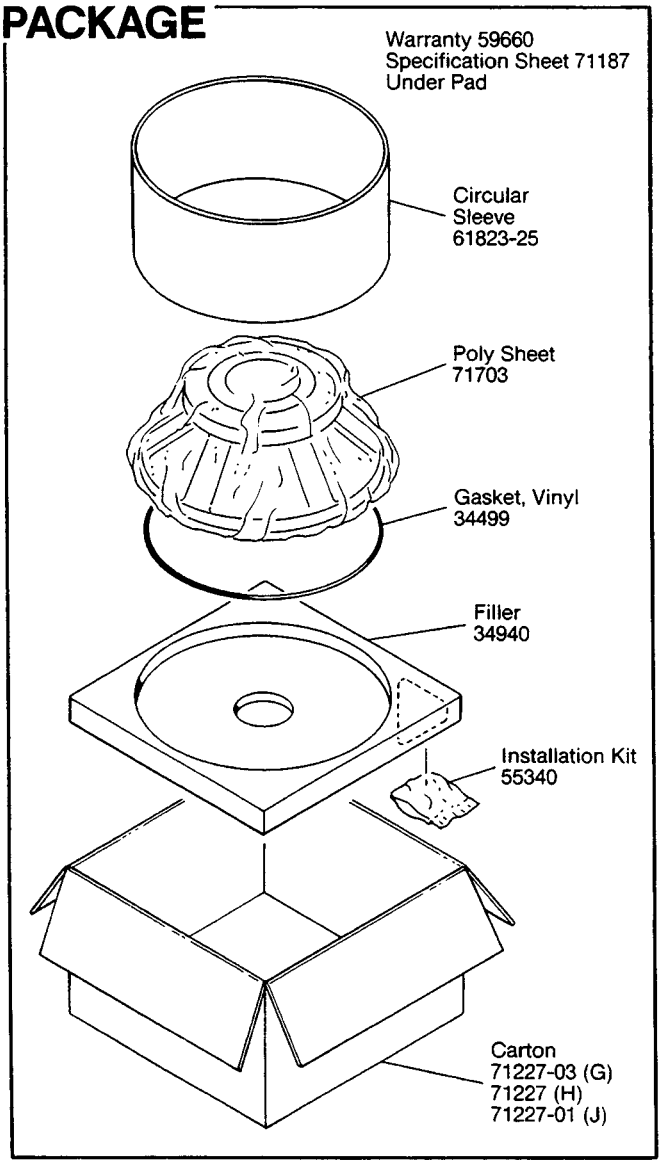

COMPONENT VIEW

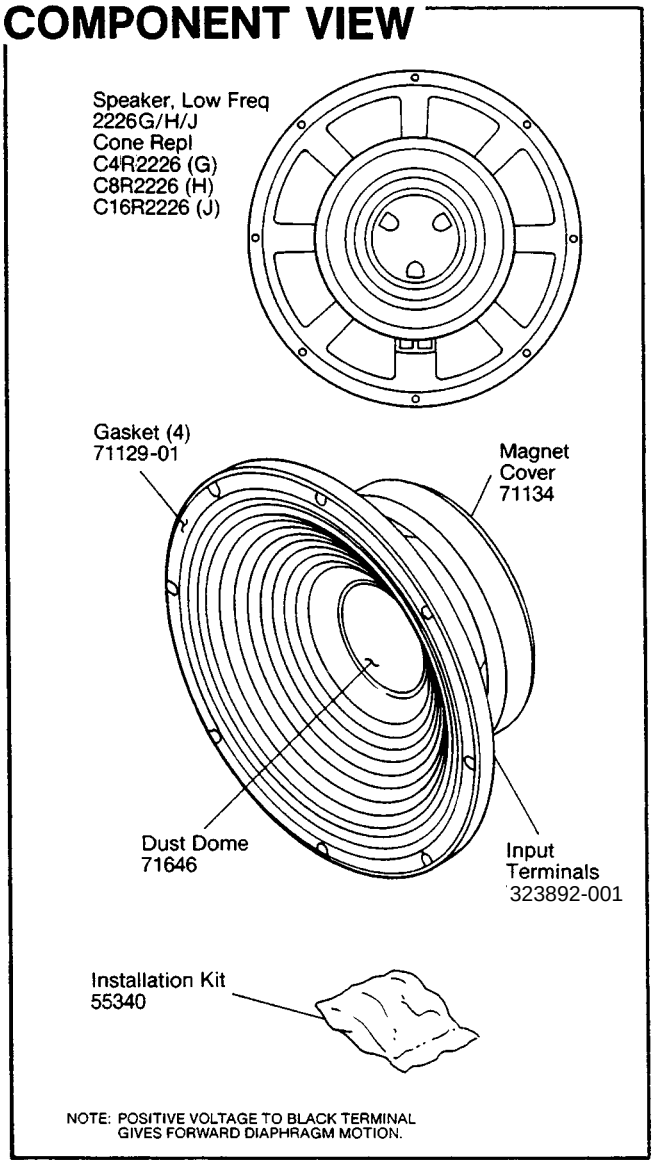


JBL2226G/H/J REV C


07-03

JBL2226G/H/J

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JBL INCORPORATED. THEY ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

MECHANICAL DRAWING

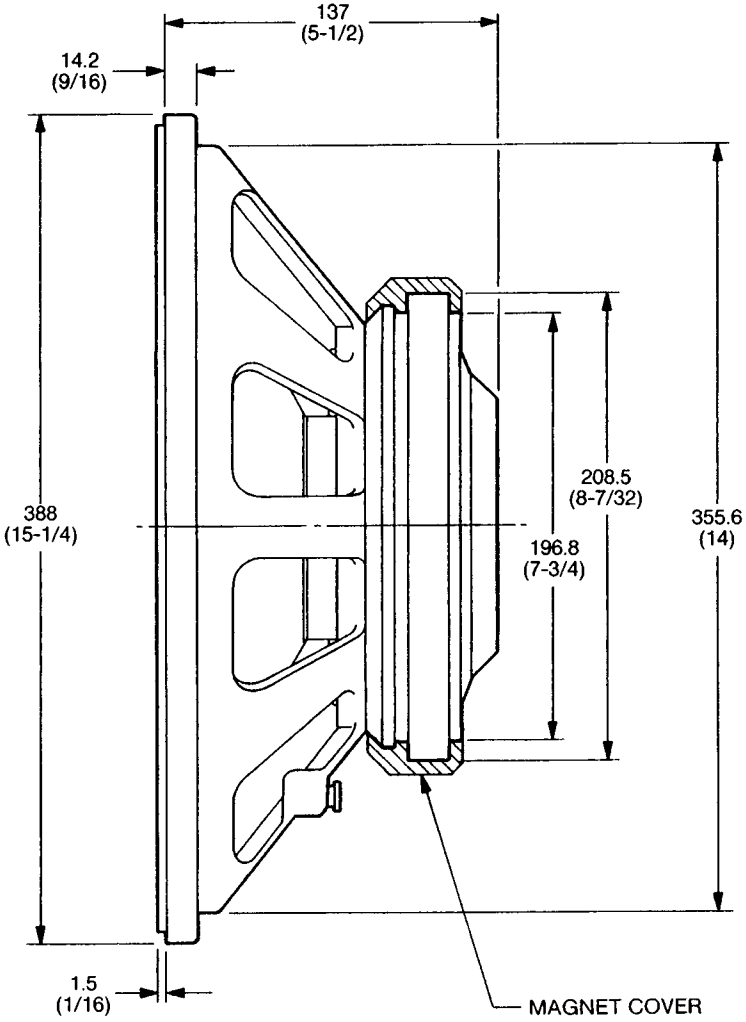

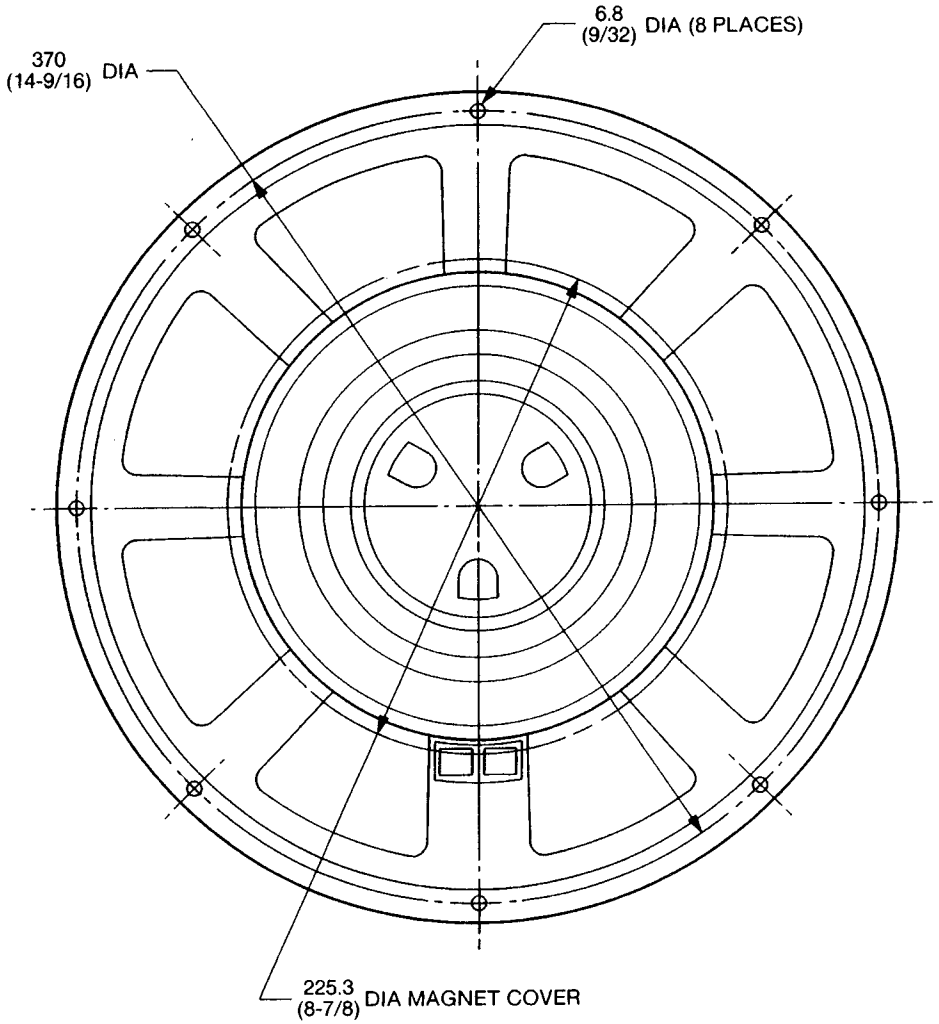

ALL DIMENSIONS ARE REF. ONLY

NOTE: DIMENSIONS IN ( ) ARE IN INCHES