JBL Incorporated, 8500 Balboa Boulevard, P.O. Box 2200. Northridge, California 91329 U.S.A.

Technical Manual

JBL2441

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

• Nominal Impedance:	16 ohm
• Power Capacity:	70W Continuous Program
• Frequency Range:	500 Hz to 18 kHz
• Sensitivity:	118 dB SPL*
• Crossover Frequencies:	500 Hz or Higher

SYSTEM COMPONENTS:

• Cabinet:	N/A
• Grille:	N/A
• High Frequency Transducer:	100mm (4 in.) Aluminum Diaphragm (2441)
• DC Resistance:	8 ohm ±8% Aluminum Wire

AURAL SWEEP TEST SPECIFICATIONS:

A. H.F. Aural Sweep Test: 2.83V Input, 550 Hz to 1.2 kHz

PHYSICAL SPECIFICATIONS:


• Enclosure Dimensions:	178mm x 178mm x 137mm D (7.0 x 7.0 x 5.375 in. D)
• Shipping Weight:	26 lbs. (11.8 kg.)
• Magnet Alnico	

WARRANTY INFORMATION:


• Refer to the Warranty Statement packed with each product.

*1 Watt (4.0 V RMS) @ 1 Meter

PACKAGE

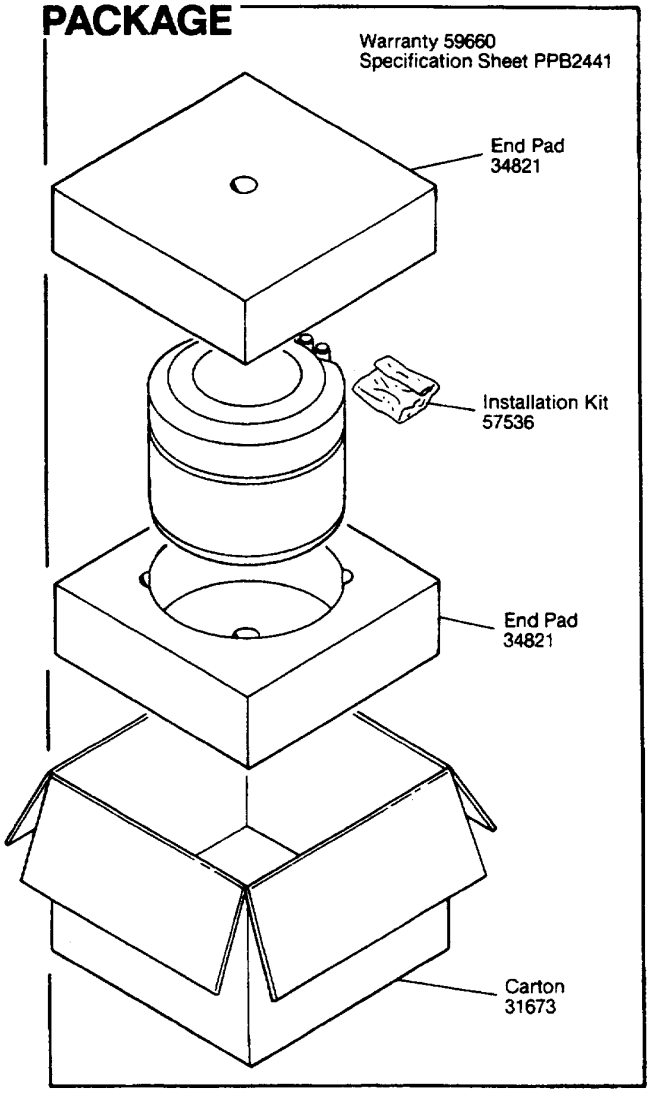

COMPONENT VIEW

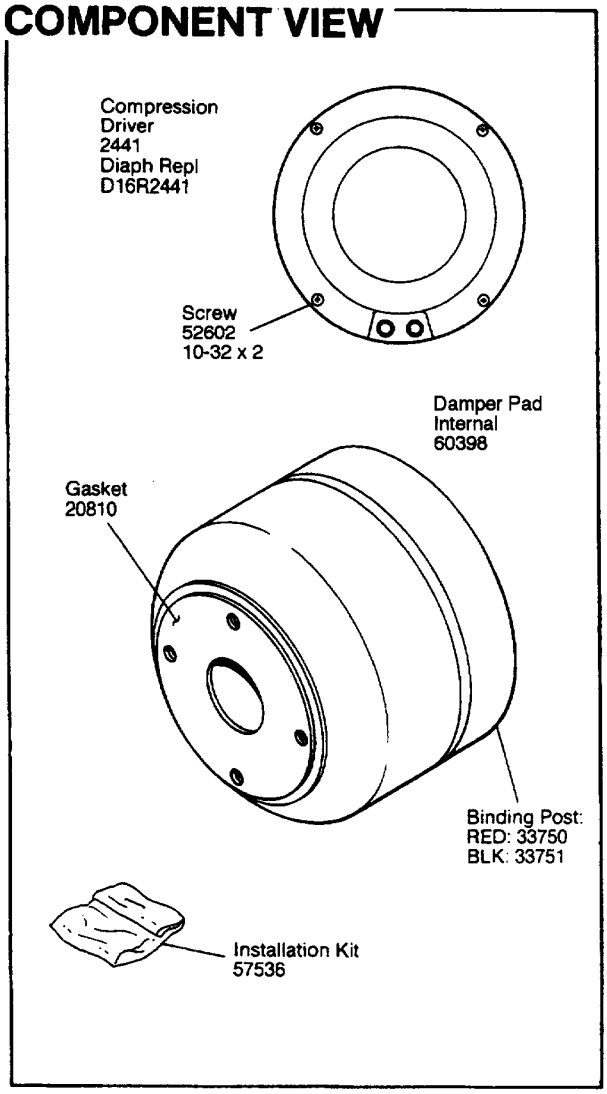


JBL2441 REV C

7-97

JBL2441

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JBL INCORPORATED. THEY ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION

MECHANICAL DRAWING

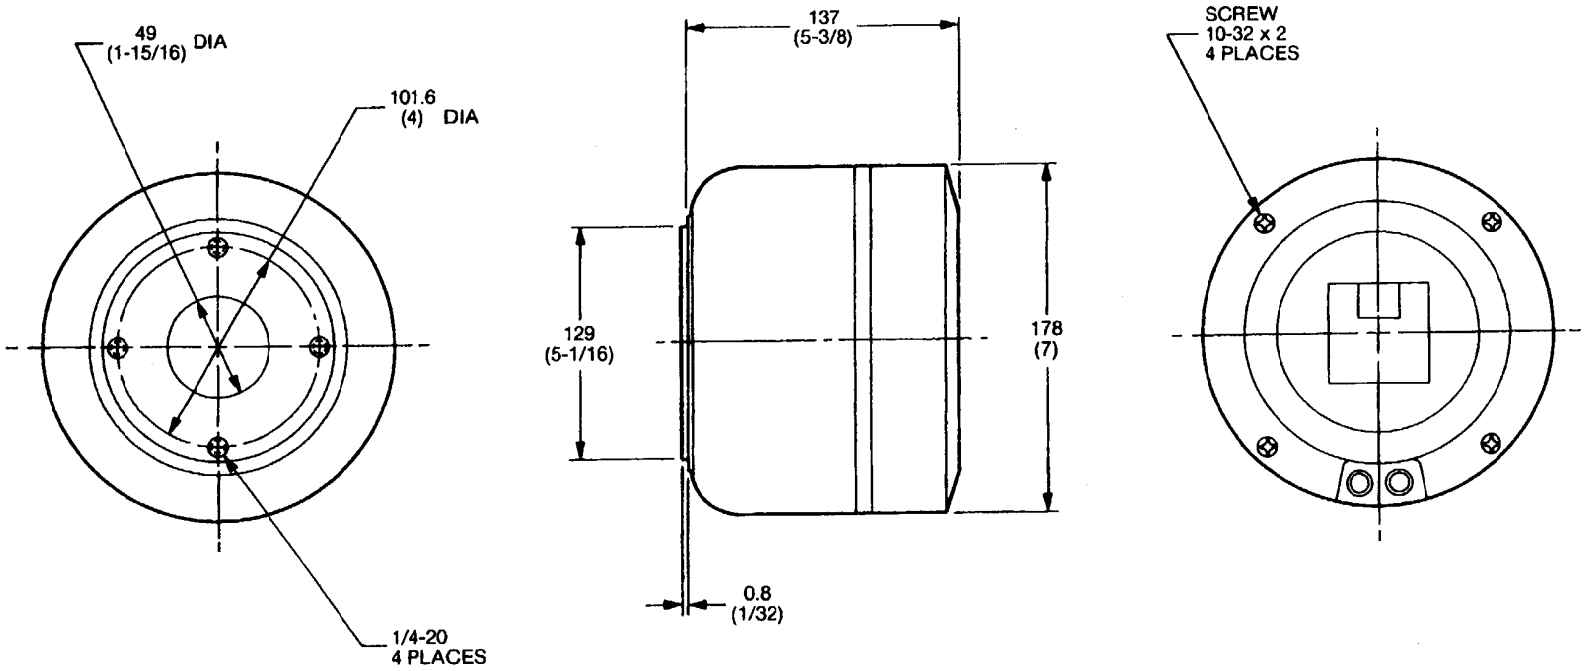

ALL DIMENSIONS ARE REF. ONLY

NOTE: DIMENSIONS IN ( ) ARE IN INCHES