JBL Incorporated, 8500 Balboa Boulevard, P.O. Box 2200, Northridge, California 91329 U.S.A.

Technical Manual

JBL4674A

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 8 ohm
- Power Capacity: Continuous Pink Noise: 150W
  Continuous Program: 300W
- Frequency Range: 45 Hz to 20 kHz
- Sensitivity: 103 dB SPL*
- Crossover Frequencies: 500 Hz

SYSTEM COMPONENTS:

- Cabinet: C4560BKA
- Grille: N/A
- Low Frequency Transducer: 380mm (15 in.) Cone Transducer (2225H)

*1 Watt (2.83 V RMS) @ 1 Meter

SYSTEM COMPONENTS: *(cont'd)*

- High Frequency Transducer: 100mm (4 in.) Pure Titanium Diaphragm (2445J)
- Crossover Network: 3115A


PHYSICAL SPECIFICATIONS:

- Enclosure Dimensions: 1194mm x 762mm x 606mm D (47.0 x 30.0 x 23.87 in. D)
- Shipping Weight: 170 lbs. (77 kg.)

WARRANTY INFORMATION:

- Refer to the Warranty Statement packed with each product.

PACKAGE

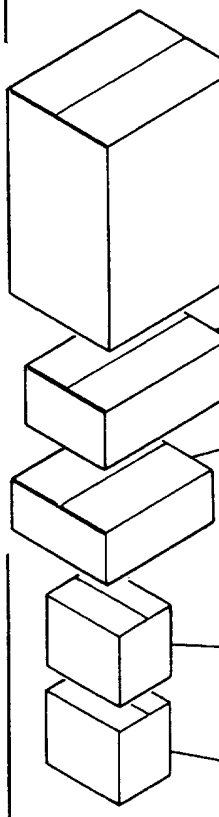

4560BKA
Warranty 59660
Corner Pad 53295
Carton 54258


2380
Warranty 59660
Specification Sheet 67160
Filler 63069
Carton 63068

2225H
Warranty 59660
Packaging 49790P
Carton 59891


2445J
Warranty 59660
Specification Sheet SS2445
Pad 60657, 61247
Carton 60656

3115A
Warranty 50766
Specification Sheet 63863
Pad, Filler 12867
Carton 10455

WIRING DIAGRAM

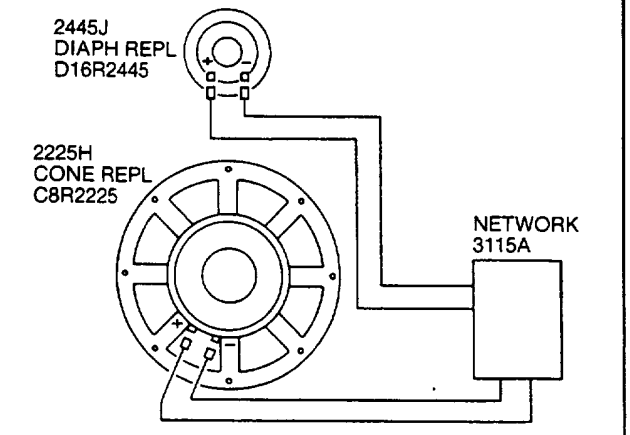

SCHEMATIC 3115A

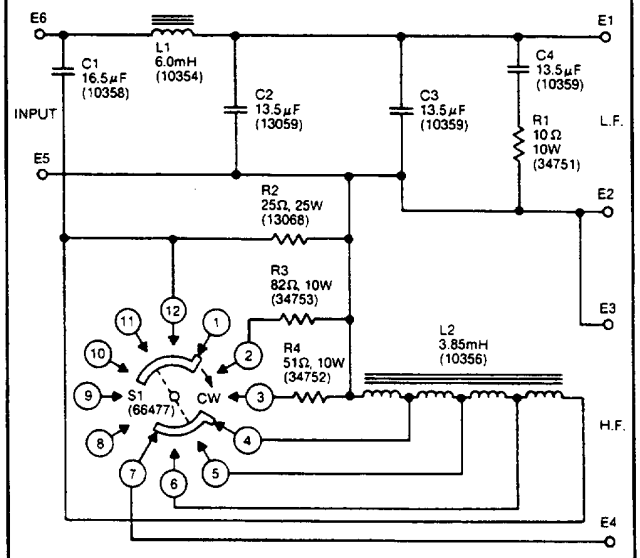


JBL4674A REV C

11-93

JBL4674A

COMPONENT EXPLODED VIEW

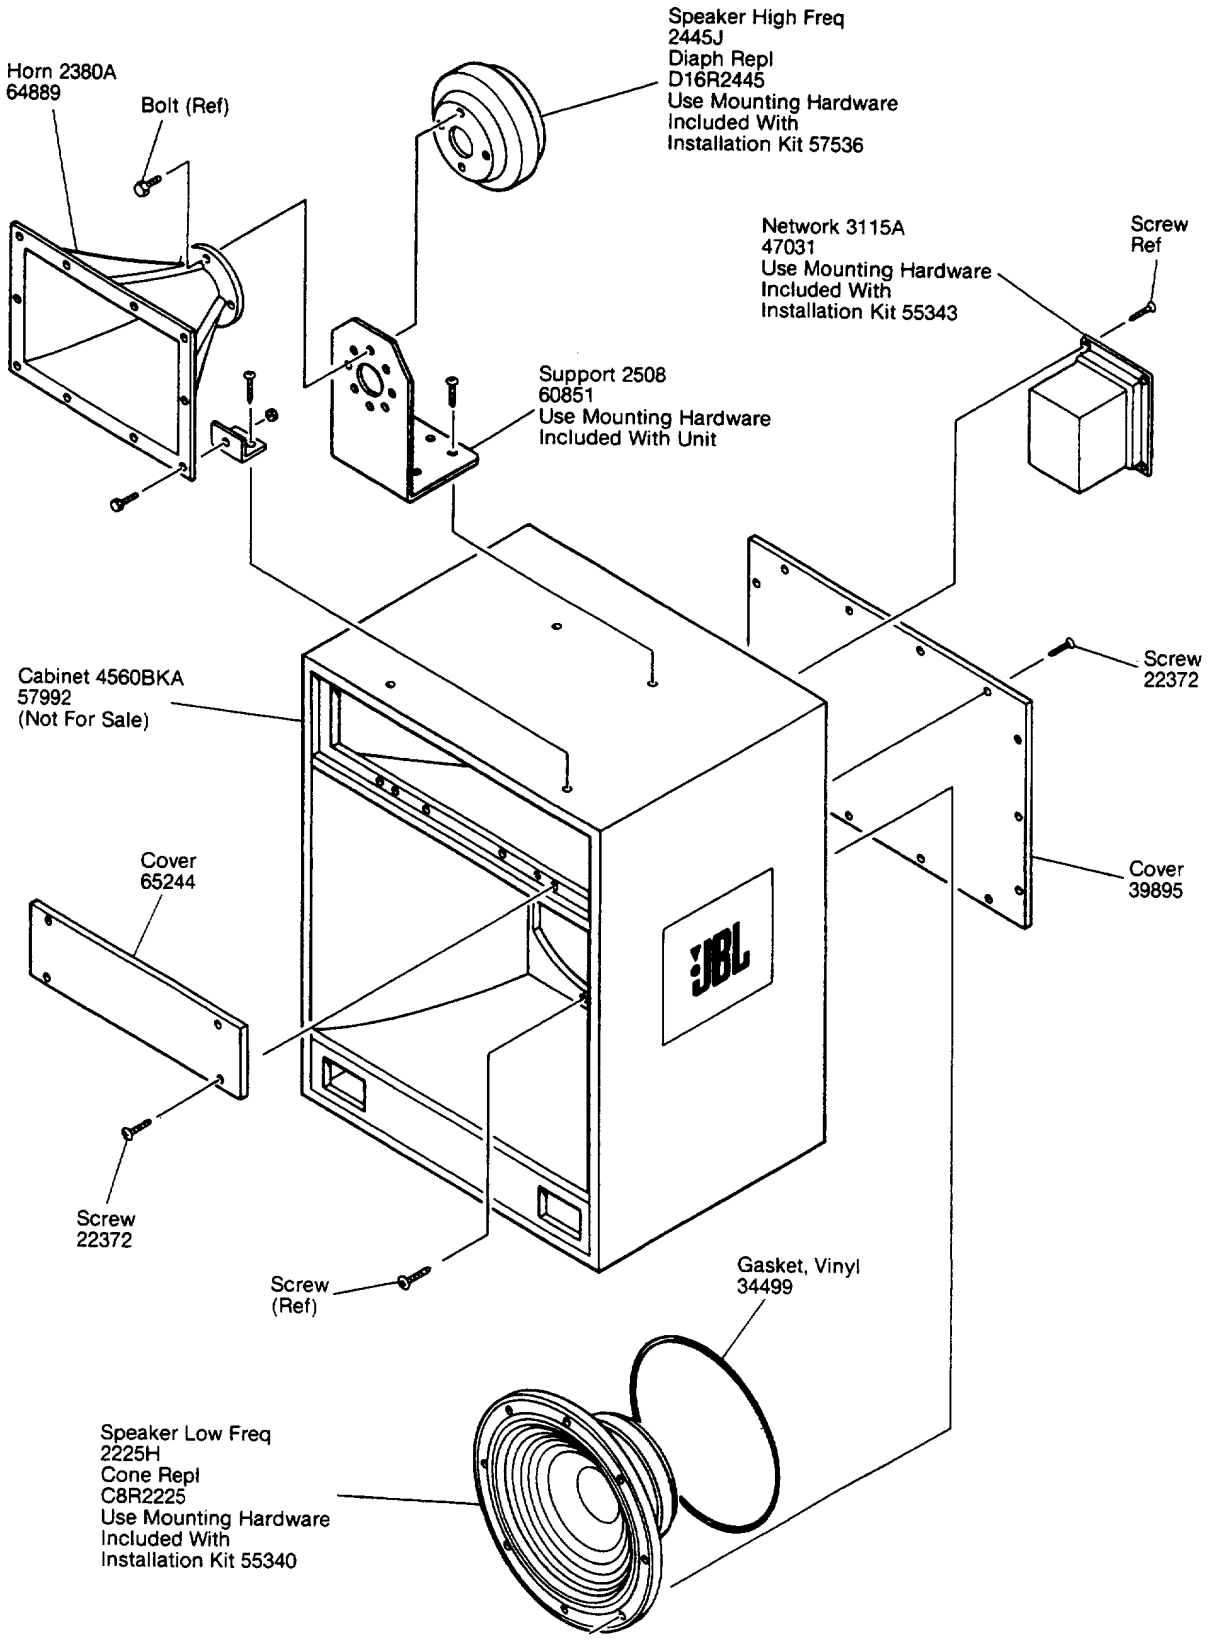

JBL4674A