JBL Incorporated, 8500 Balboa Boulevard, P.O. Box 2200, Northridge, California 91329 U.S.A.

Technical Manual

JBL4698B

KEYBOARD/ELECTRONIC DRUM/REINFORCEMENT SYSTEM

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

• Nominal Impedance:	4 ohm
• Power Capacity:	Continuous Pink Noise: 400W Continuous Program 800W
• Frequency Range:	56 Hz to 21.5 kHz
• Sensitivity:	103 dB SPL*
• Crossover Frequencies:	500 Hz - 3 kHz

SYSTEM COMPONENTS:

• Cabinet:	C4698
• Grille:	66590
• Low Frequency Transducer:	460mm (18 in.) Cone Transducer

*1 Watt (2.83 V RMS) @ 1 Meter

SYSTEM COMPONENTS: *(cont'd)*

• Mid Frequency Transducer:	250mm (10 in.) Cone Transducer
• High Frequency Transducer:	44mm (1.75 in.) Aluminum Diaphragm Compression Driver
• Crossover Network:	66589


PHYSICAL SPECIFICATIONS:

• Enclosure Dimensions:	1021mm x 751mm x 478mm D (40.18 x 29.56 x 18.81 in. D)
• Shipping Weight:	169 lbs. (76.6 kg.)


WARRANTY INFORMATION:

- Refer to the Warranty Statement packed with each product.

PACKAGE

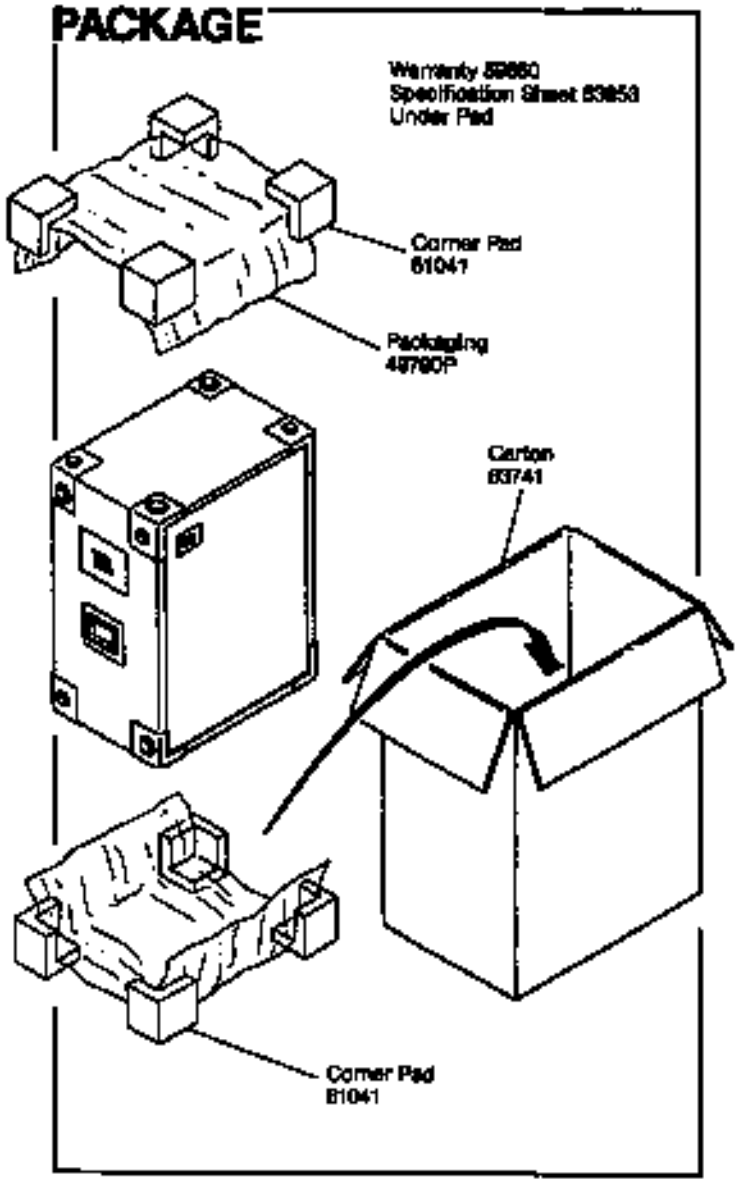


WIRING DIAGRAM

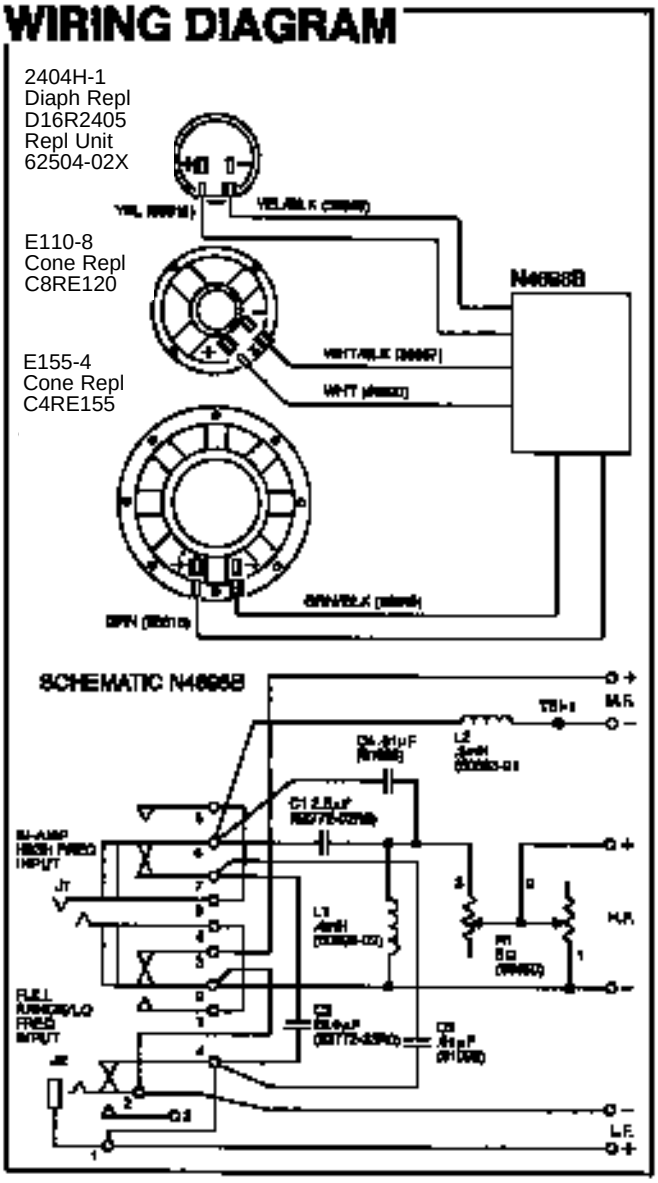

JBL4698B REV G

JBL4698B

COMPONENT EXPLODED VIEW

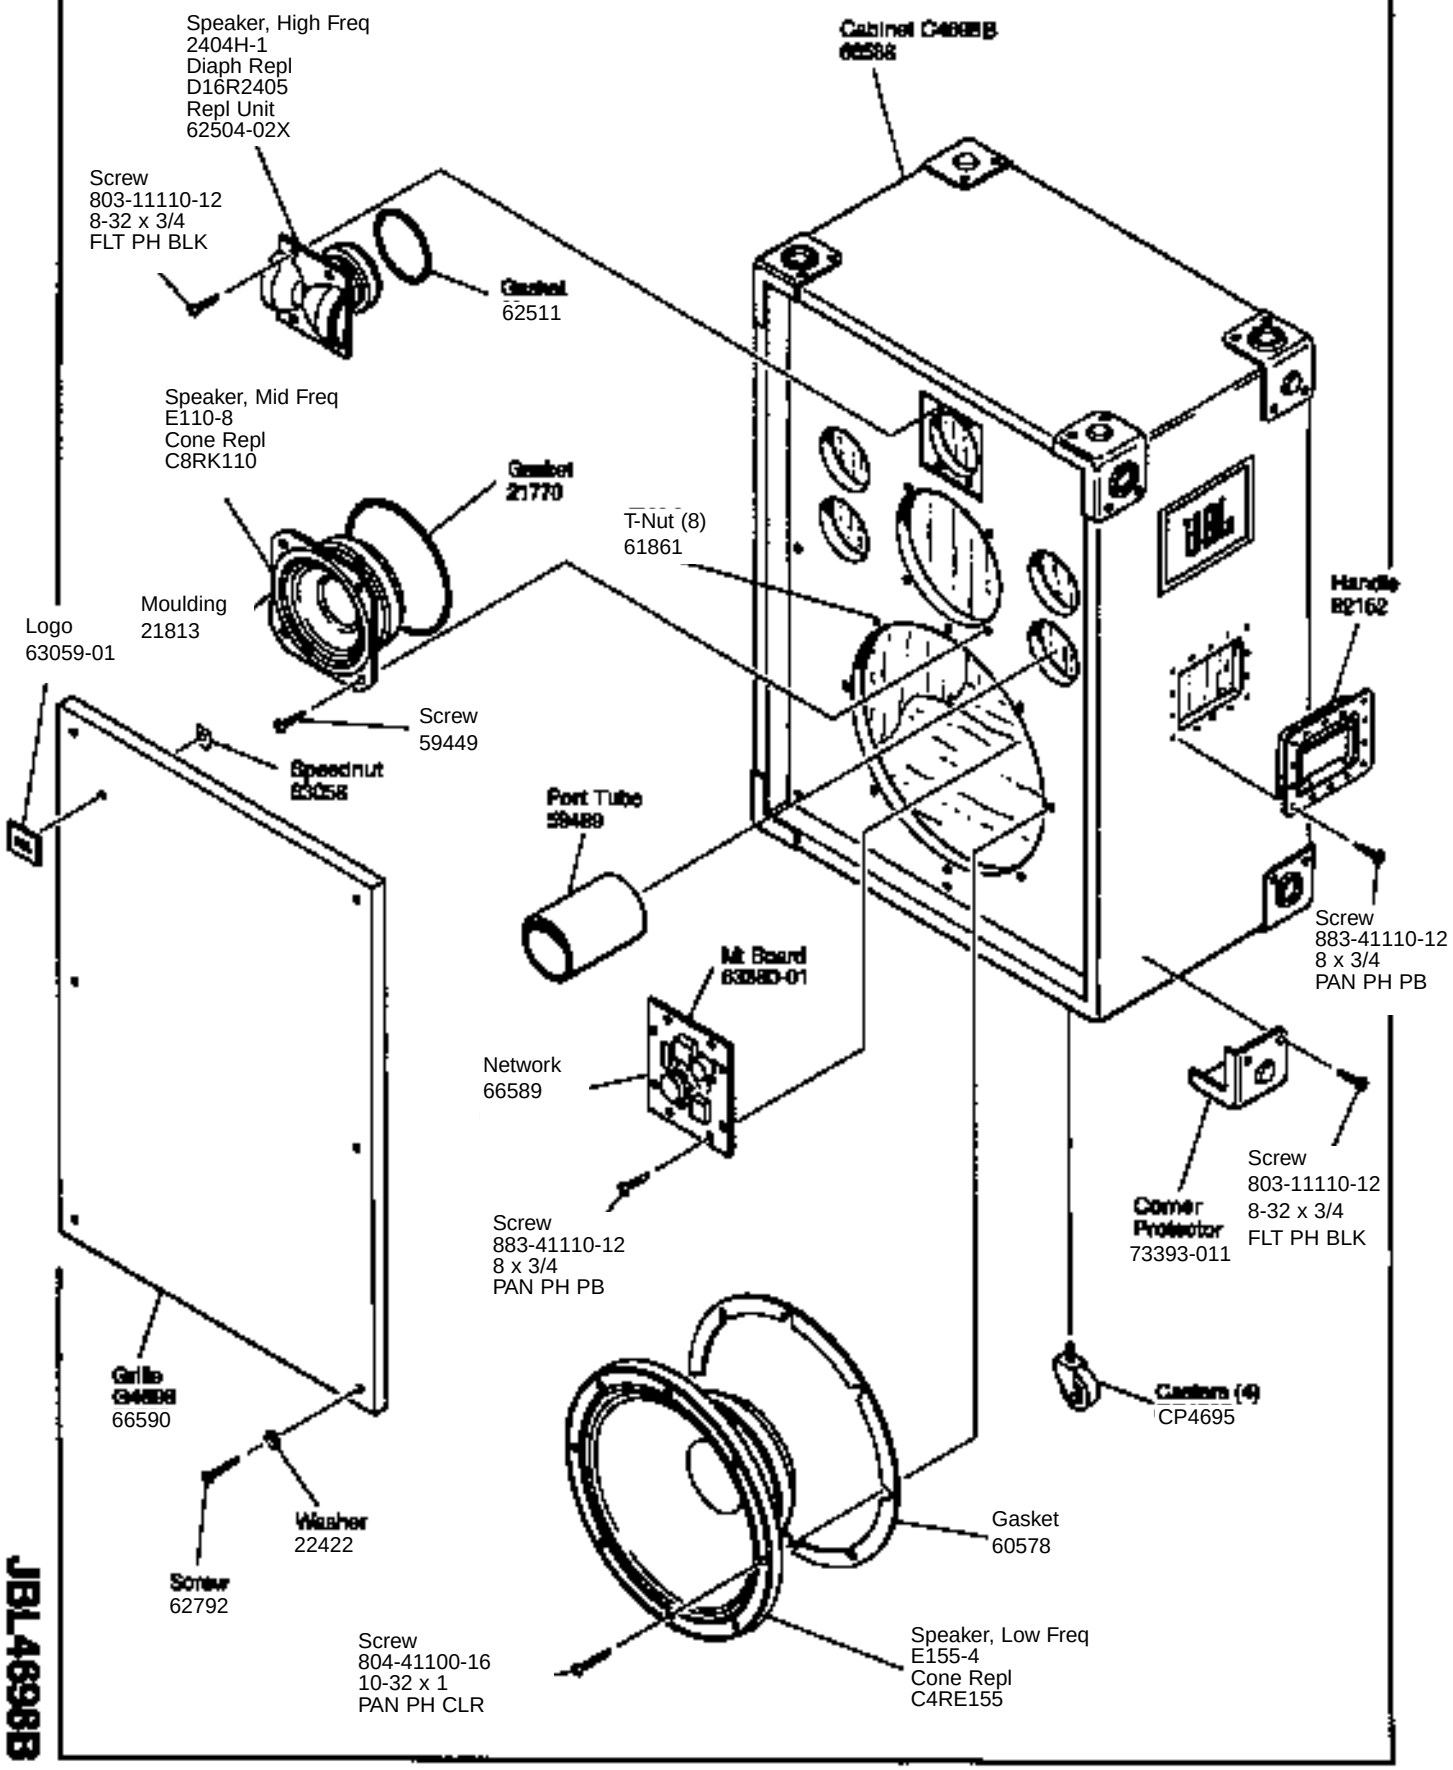

JBL4698B