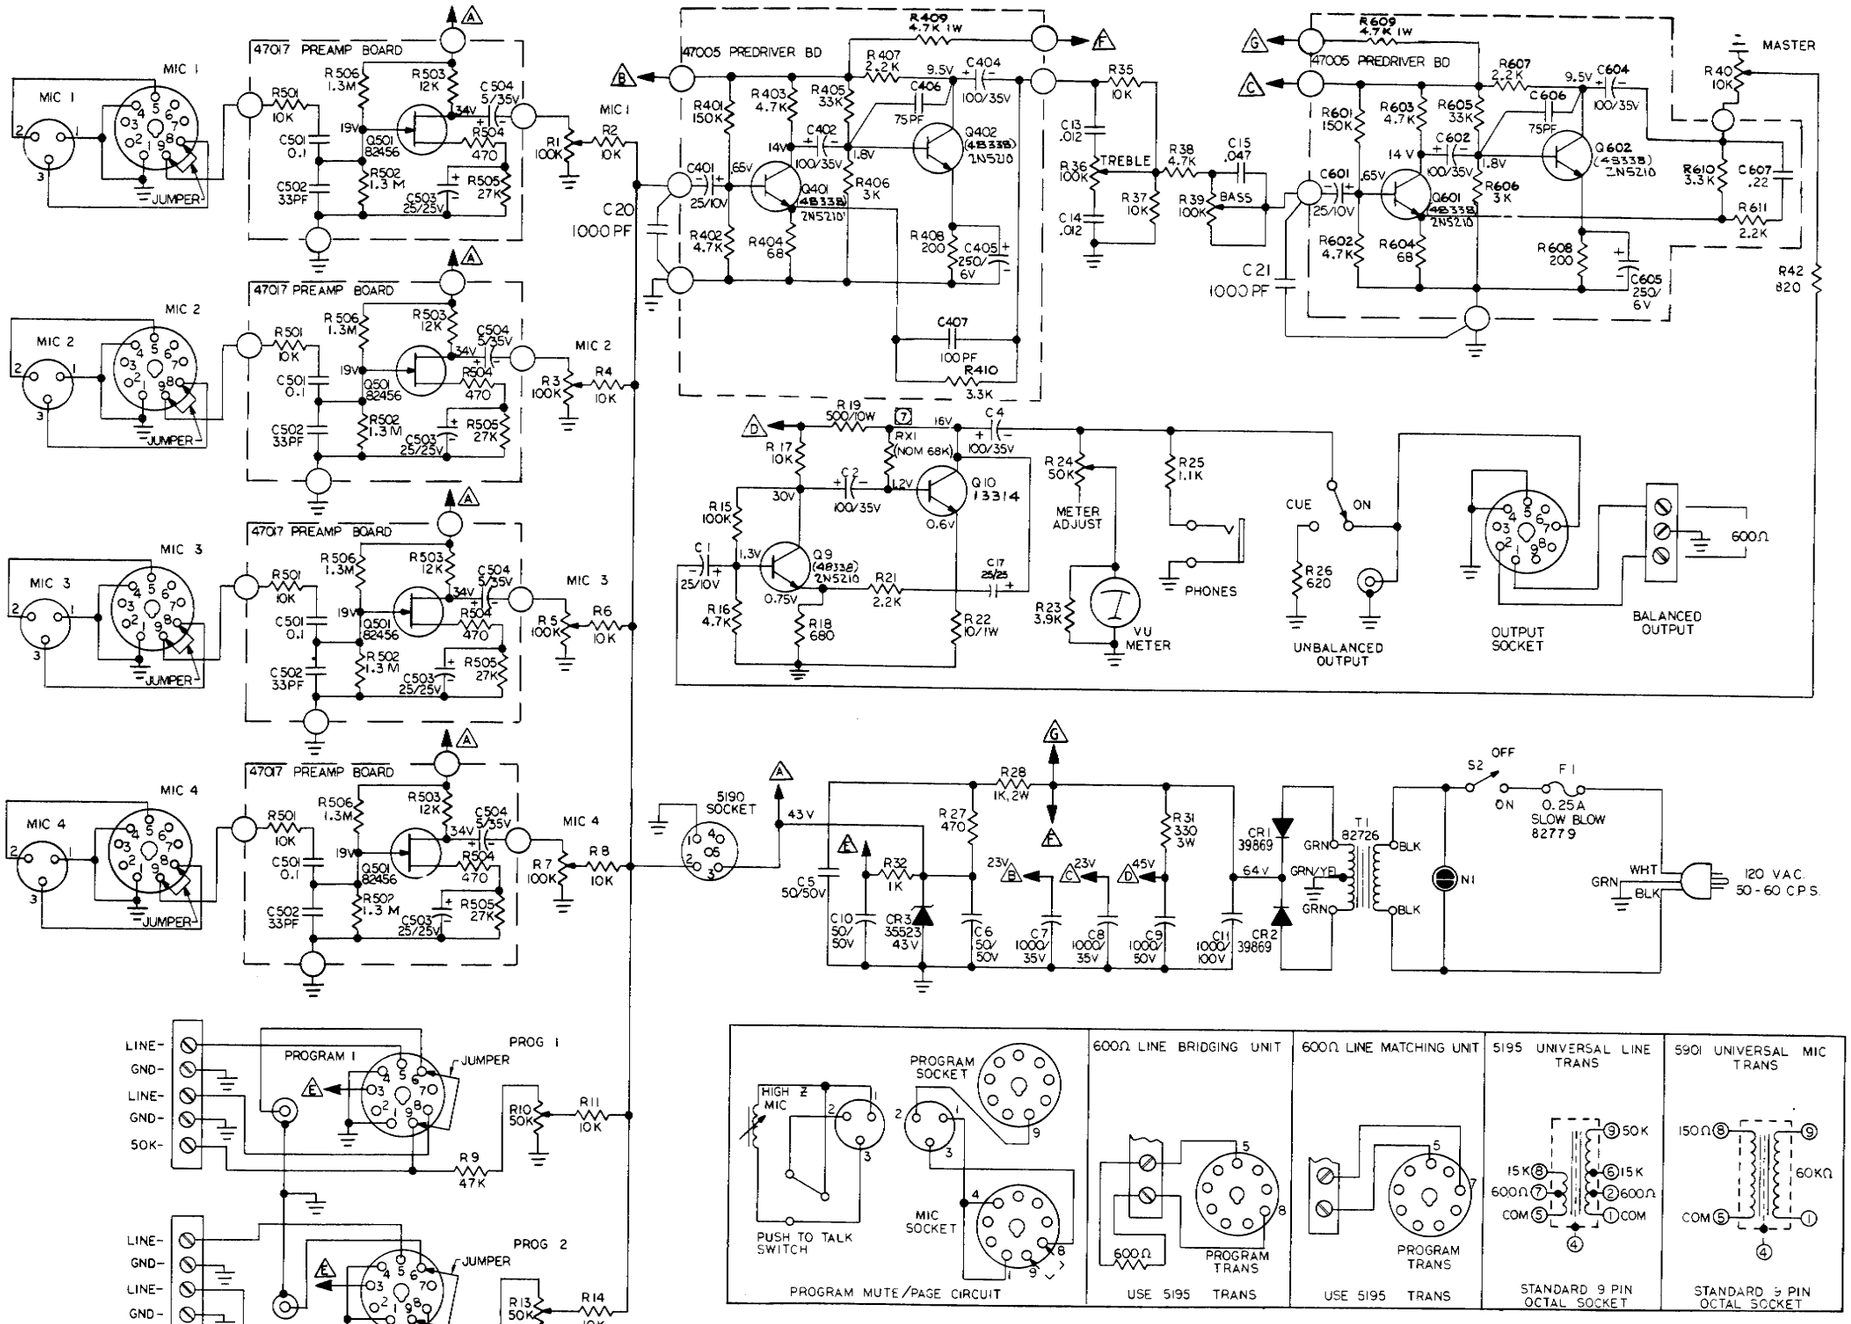


(7) SELECT RX1 TO GIVE DITORTION LESS THAN .25% AT 1KHZ AND AT +18 DBM OUT.

6. SEE DWG. 47215 REF FOR TEST SPECIFICATIONS.
5. APPROVED PRODUCTION SAMPLE WITH CURRENT BILL OF MATERIALS MAINTAINED BY ENG DEPT.
4. ALL VOLTAGES ARE POSITIVE TAKEN FROM GROUND.
3. ALL CAPACITOR VALUES IN MICROFARADS. THOSE OVER 1 MFD ARE POLARIZED ELECTROLYTICS.
2. ALL RESISTOR VALUES IN OHMS, 1/2 WATT.
1. JBL RESERVES THE RIGHT TO MAKE MINOR COMPONENT CHANGES WITHOUT NOTICE.

NOTES: UNLESS OTHERWISE SPECIFIED

SCHEMATIC — MODEL 5600-2B

James B. Lansing Sound, Inc.
8500 Balboa Boulevard, Northridge, California 91329.

38014 SD MODEL 5600-2B PRINTED IN U.S.A.