Technical Manual

JBL630

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Rated Impedance: 4 ohm
- Power Range: 10-150 Watts
- Frequency Response: 45 Hz to 20K Hz
- Sensitivity: 93 dB*
- Crossover Frequencies: 2500 Hz, 200 Hz

SYSTEM COMPONENTS:

- Cabinet: CJBL630
- Grille: GJBL630
- Low Frequency: Two 6½" High Polymer Laminate Transducers

SYSTEM COMPONENTS: *(cont'd)*


- High Frequency: 1" Transducer with Titanium Laminate Diaphragm
- Crossover Network: NJBL630, 3-Way System

PHYSICAL SPECIFICATIONS:


- Enclosure Dimensions: 34.0 x 15.0 x 7.5 D (inch)
- Shipping Weight: 40 lbs.

*1 Meter @ 2.83 VRMS

PACKAGE

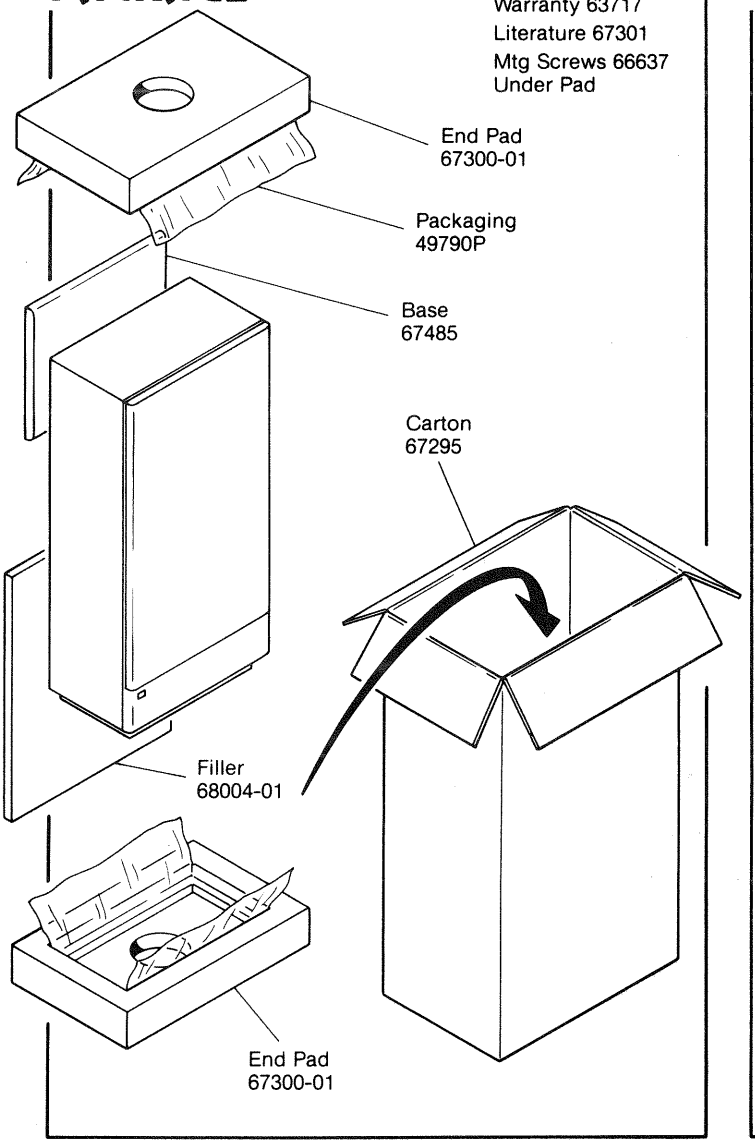

WIRING DIAGRAM

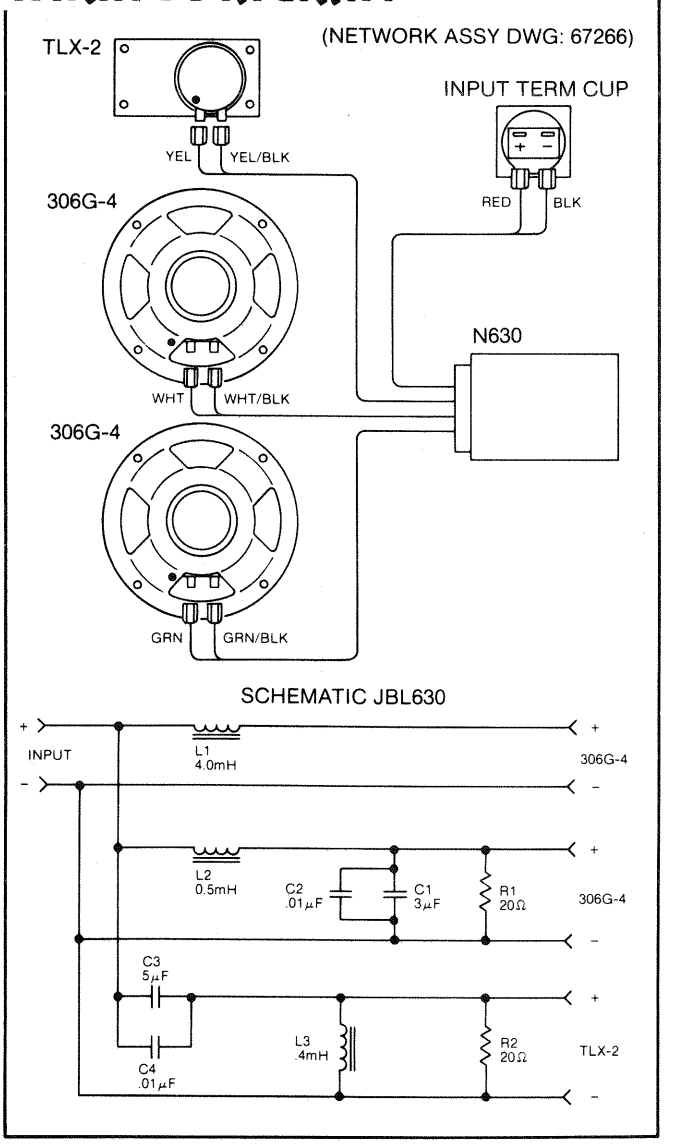

JBL630 REV A

COMPONENT EXPLODED VIEW

