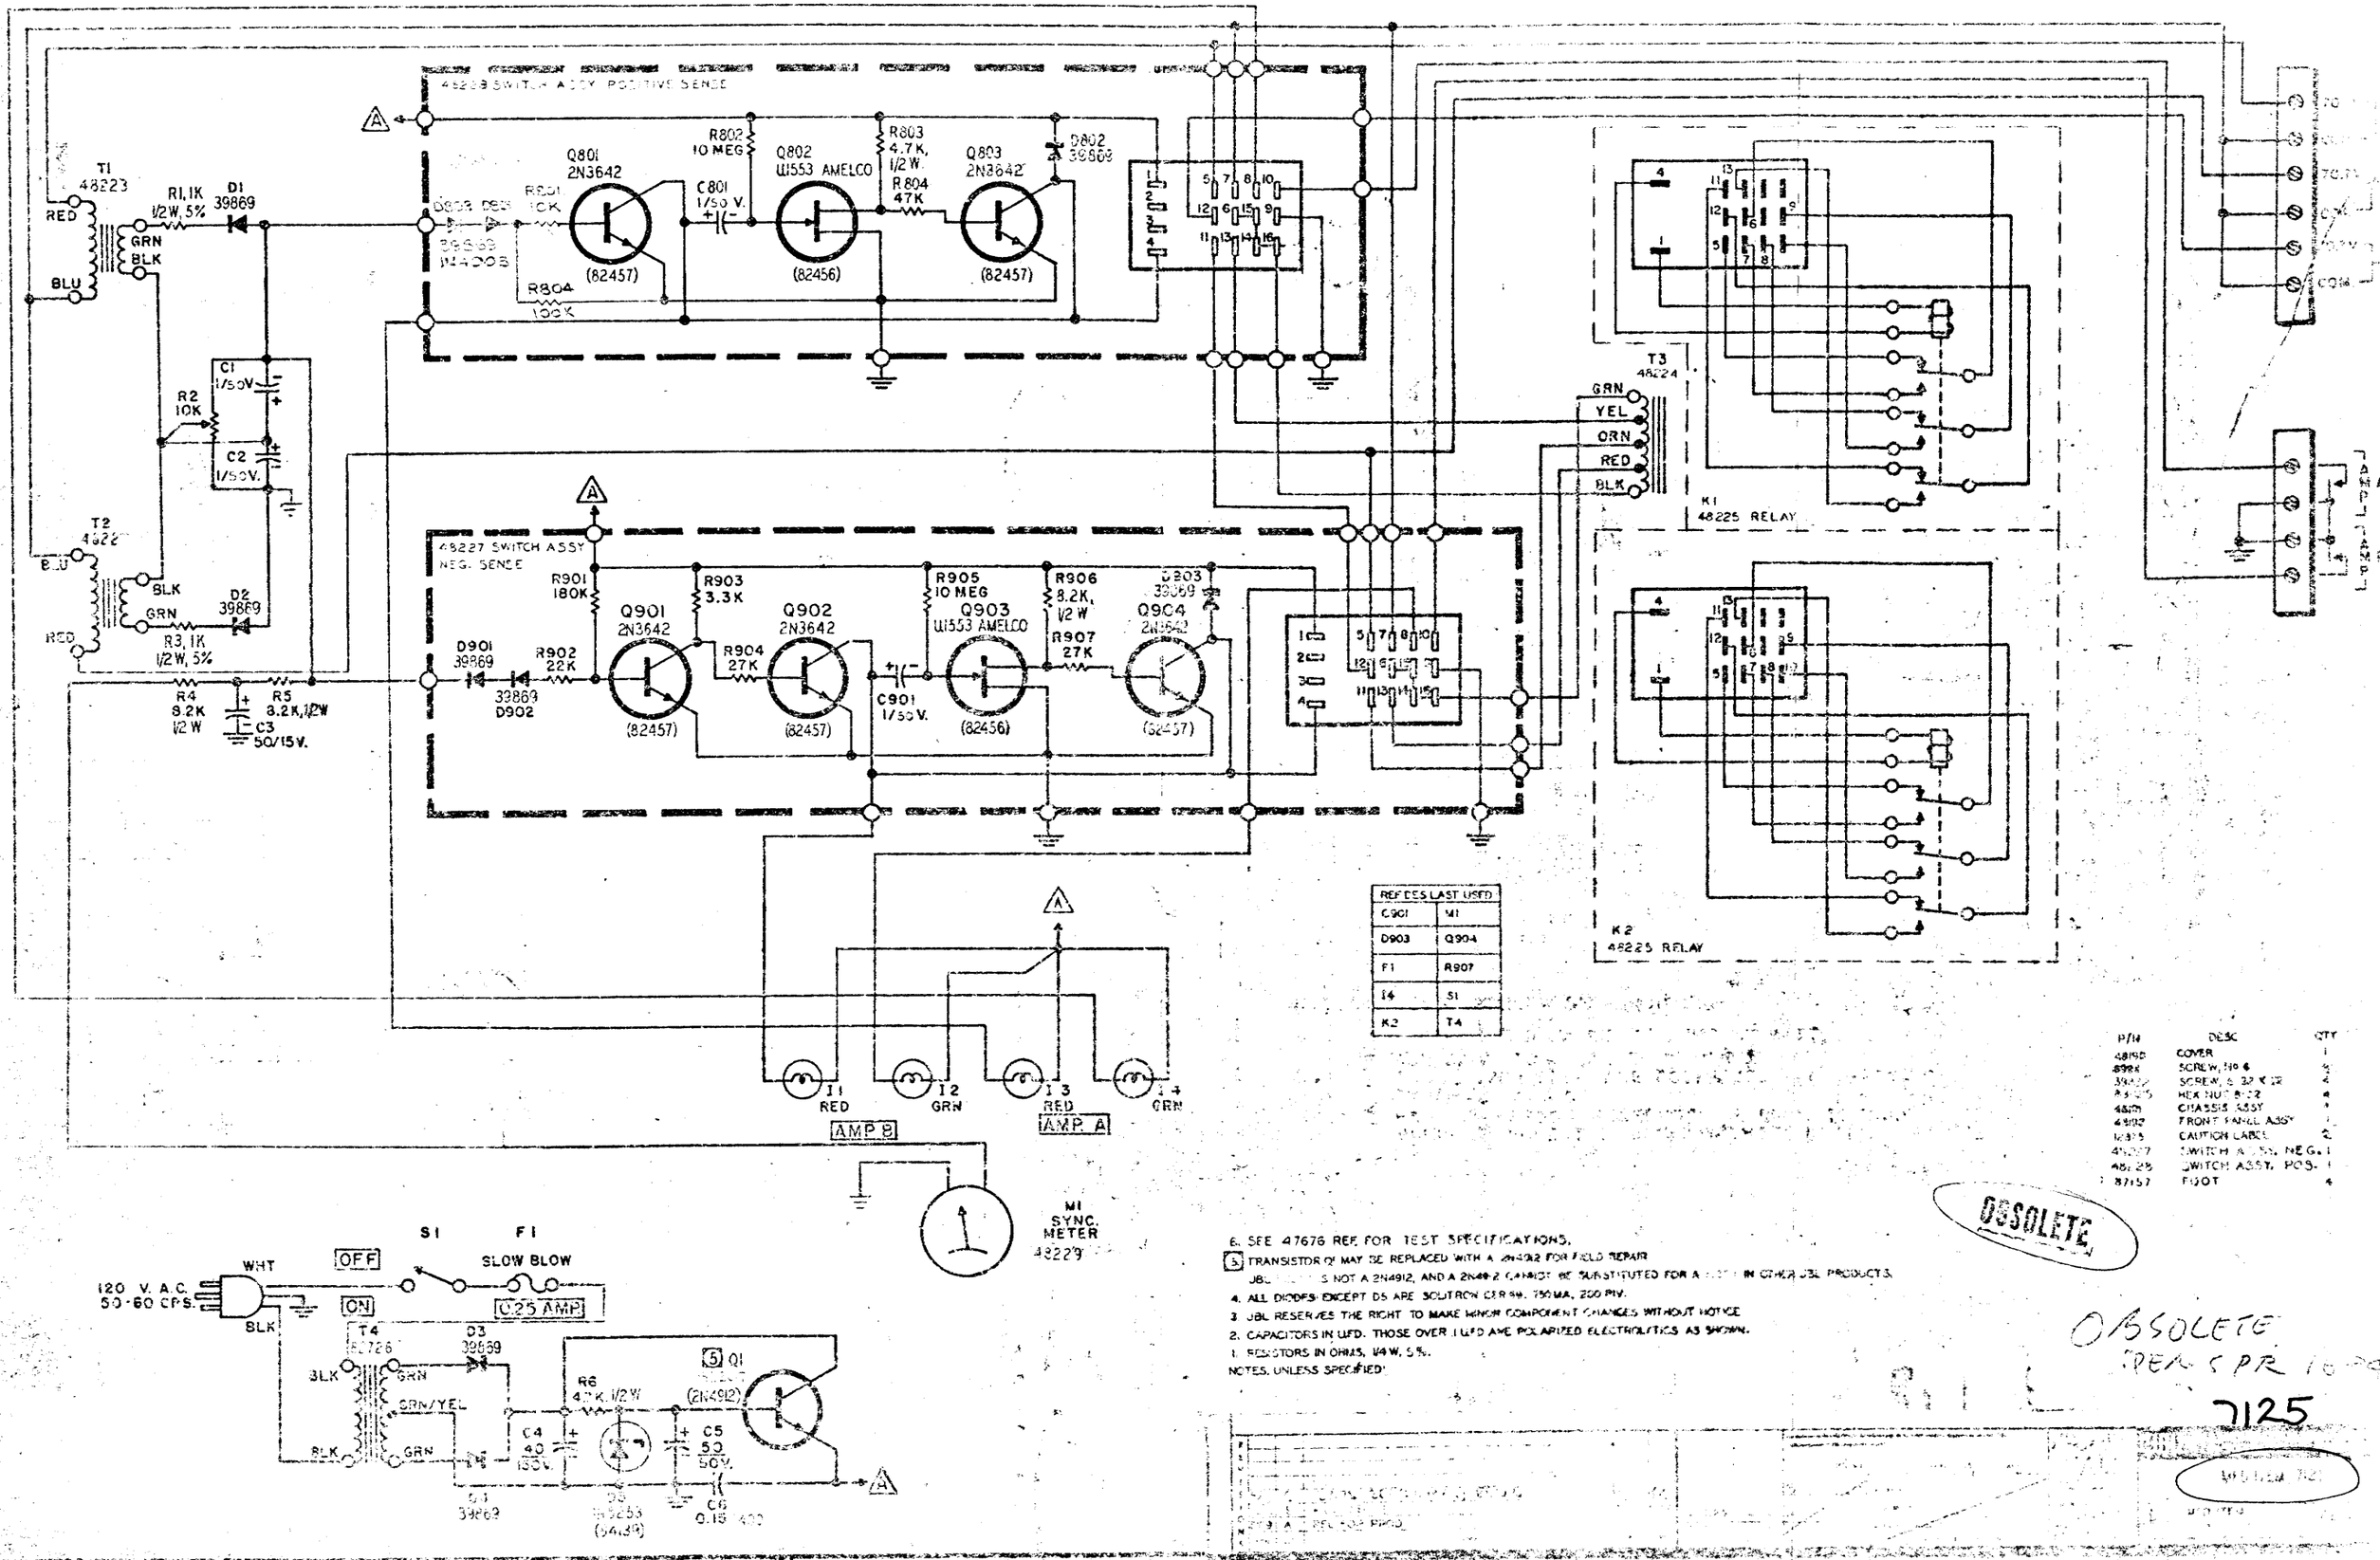


REFDES LAST USED	
C901	M1
D903	Q904
F1	R907
I4	S1
K2	T4

P/N	DESC	QTY
48150	COVER	1
8928	SCREW, NO 6	5
39[illegible]	SCREW, 6-32 X 1/2	4
[illegible]5	HEX NUT 6-32	4
48[illegible]	CHASSIS ASSY	1
48[illegible]	FRONT PANEL ASSY	1
[illegible]5	CAUTION LABEL	2
48[illegible]	SWITCH ASSY, NEG.	1
48[illegible]	SWITCH ASSY, POS.	1
87157	FOOT	4

OBSOLETE

6. SEE 47676 REF FOR TEST SPECIFICATIONS.
5. TRANSISTOR Q1 MAY BE REPLACED WITH A 2N4912 FOR FIELD REPAIR. JBL [illegible] IS NOT A 2N4912, AND A 2N4912 CANNOT BE SUBSTITUTED FOR A [illegible] IN OTHER JBL PRODUCTS.
4. ALL DIODES EXCEPT D5 ARE SOLITRON CER 99, 750 MA, 200 PIV.
3. JBL RESERVES THE RIGHT TO MAKE MINOR COMPONENT CHANGES WITHOUT NOTICE.
2. CAPACITORS IN UFD. THOSE OVER 1 UFD ARE POLARIZED ELECTROLYTICS AS SHOWN.
1. RESISTORS IN OHMS, 1/4 W, 5%.
NOTES, UNLESS SPECIFIED:

OBSOLETE
REPLACED BY
7125