JBL Incorporated, 8500 Balboa Boulevard, P.O. Box 2200, Northridge, California 91329 U.S.A.

Technical Manual

JBL 8128

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Driver Impedance: 8 Ohms
- Driver Power Capacity: 25W
- Frequency Range: 50 Hz – 16kHz (-10 dB)
- Sensitivity: 97 dB (1 kHz - 8 kHz) (2.83V@ 1m)
- Component: 200 mm (8 in) Full-Range
- Coverage: 90° conical
- 70V/100V Transformer Taps: 6W, 3W, 1.5W, (0.75W at 70V only)
- Termination: Bare Wire
- Dimensions: (Diameter x Depth) Ø 257 mm (10.1 in) round baffle x 105 mm (4.1 in) depth from back of baffle
- Cutout Dimension: Ø 206 mm (8.1 in)
- Included Accessories: Sculpted grille
- Optional Accessories: rails MTC-8128C C-ring, MTC- Rail tile

SPECIFICATIONS: ***(Cont'd)***

- DC Resistance: 7.3 ohms

AURAL SWEEP TEST SPECIFICATIONS:

A: System Aural Sweep Test: 5.0V Input, 50 Hz to 18 kHz

PHYSICAL SPECIFICATIONS:

- Net Weight: 3.0 lbs. (1.4kg.)

WARRANTY INFORMATION:

- Refer to Warranty Statement packed with each product.

PACKAGE


Warranty 59660

Specification Sheet
440912-002

Box Label
091-00716-01

Carton, Master
443933-001

Foam Insert
443932-001

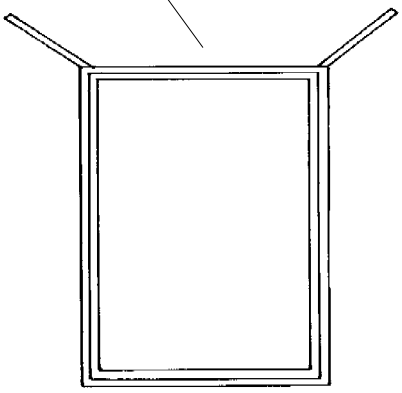

WIRING DIAGRAM

Dog Ear (4)
365485-001
8124/8128



Transformer
365682-001

Grille
365518-001

Transformer Tap Color Codes:

70V	.75W	1.5W	3W	6W	Com
100V	1.5W	3W	6W	N/C	Com
	WHITE	BLUE	BROWN	ORANGE	BLACK

Output
\+ -
Red BLK

JBL 8128 REV A

08-08

8128

8-inch, Full-range, In-Ceiling Loudspeaker

Service Bill of Materials
v1.0 - 10/21

Product is Replacement Only

