
THEY ARE LOANED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION

REVISIONS						
CHG	LTR	DESCRIPTION	DRFT	CHK	DATE	APPI
892F	A	REL FOR PROD.	SN			
792F	B	.110 x .020 WAS .110 x .250	S.N		11-7-83	

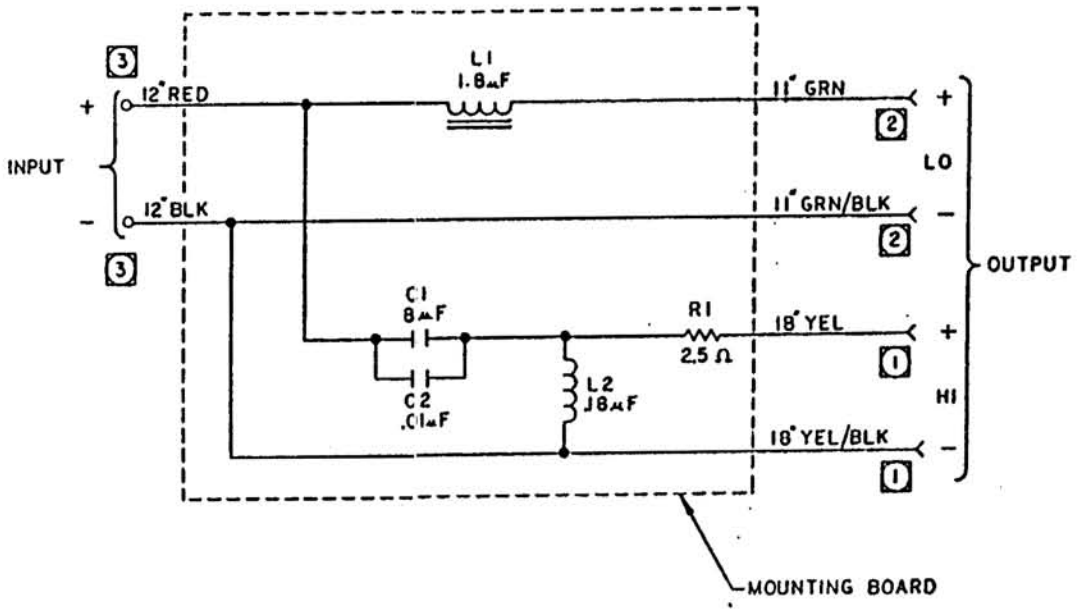

GENERAL SPECIFICATION

L1: .5 Ω DCR ± 5%; 3 AMPS @ 1KHZ FOR NO MORE THAN 10% VALUE DEVIATION.

L2: .5Ω DCR ± 5%; 1 AMP @ 1KHZ FOR MORE THAN 10% VALUE.

C1 100 V ALUMINUM ELECTROLYIC ± 10%; DISSIPATION FACTOR 5% @ 1KHZ.

C2 100 V POLYPROPYLENE FOIL ± 20%.

R1 2.5 Ω, 10 W, WIRE WOUND.

N216-1
(8216)

[3] INSTALL NO. 6 "RING" CRIMP TERMINAL.

[2] FEMALE TERMINAL FOR .250 x .032 SPADE LUG.

[1] FEMALE TERMINAL FOR .110 x .020 SPADE LUG.

NOTES: (UNLESS OTHERWISE SPECIFIED)

ITEM	PART NO.	DESCRIPTION	QTY	REMARKS

BILL OF MATERIAL

TOLERANCES (UNLESS OTHERWISE SPECIFIED)
ANGULAR
FRACTIONAL DIMENSIONS ± 1/32
ALL DIMENSIONS ARE FINISHED DIMENSIONS
DO NOT SCALE DRAWING

MATERIAL
FINISH
MODELS USED ON
N216-1

DRAWN 7/11/83
CHECKED 9-23-83
ENGR
MFG
QUAL 11-4-91
PROD

JAMES B. LANSING SOUND, INC.
A Harman International Company
Logan, Utah 84321 USA

TITLE SCHEMATIC

SIZE C | DRAWING NO. 65113-01 | REV B

SCALE NONE | SHEET 1 OF 1