

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JBL Incorporated. THEY ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

| REVISIONS | | | | | | |
|---|---|---|---|---|---|---|
| CHG | LTR | DESCRIPTION | DRFT | CHK | DATE | APPR |
| S-0472 | A | REL FOR PROD | SP | TD | 3-3 BC | |
| 5055 | B | REV. PER DCN. | LLG | | 5-8-87 | |
| 5715 | C | REV R2 VALUE, NOTES 3 & 4 | SP | | 5-22-87 | |

## GENERAL SPECIFICATIONS:

L1, L2, L3, L4: ± 10% @ 1 KHz; .5Ω DCR MAX.
SATURATION: INDUCTANCE @ 3A (120 Hz) MUST BE WITHIN 10% OF VALUE @ .1A
C2, C3, C6, C7: 100V ALUMINUM N.P.E. ± 10% @ 1 KHz; DISSIPATION FACTOR: 5% MAX @ 1 KHz
C1, C4, C5, C8: 100 V OR GREATER POLYPROPYLENE FOIL ± 20%
R1, R2, R3: 10W ± 10%
S1: 3A. SPST (TOGGLE, BAT HANDLE TYPE).

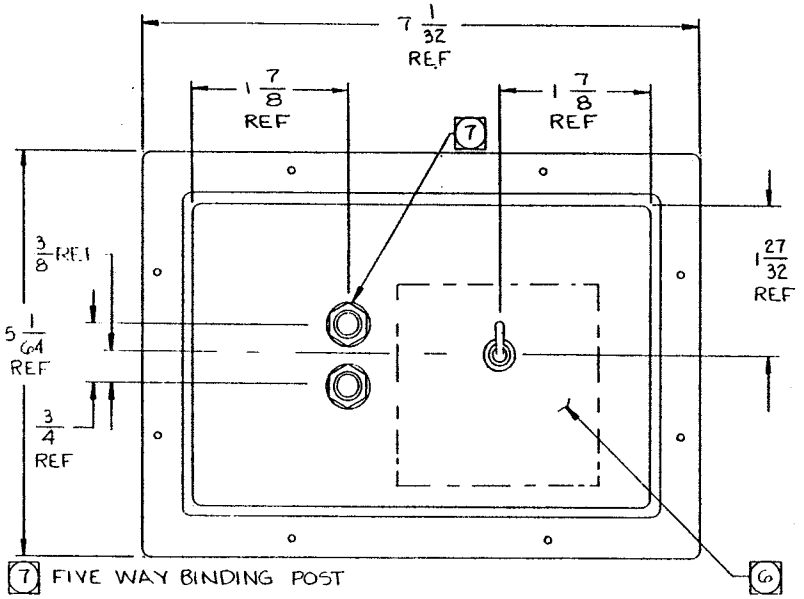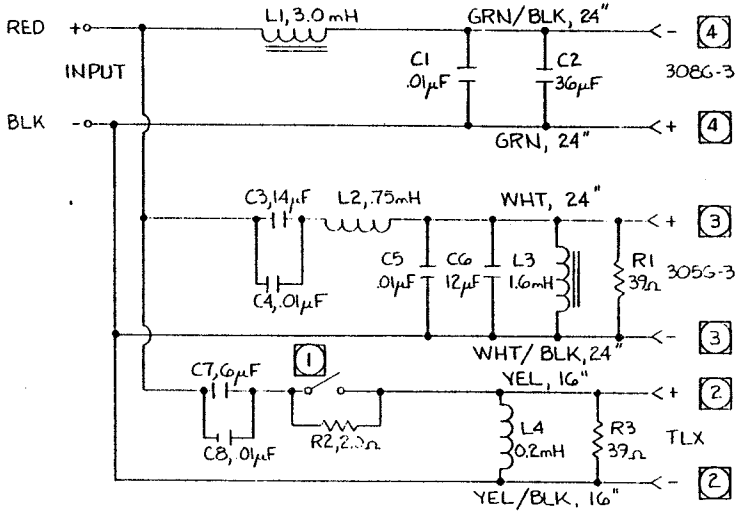


7 FIVE WAY BINDING POST

6 LABEL (P/N G8588) LOCATED WHERE SHOWN.

5 SEE DWG G4462 FOR MOUNTING HOLE PATTERN AND OVERALL DIMENSIONS.

4 FEMALE TERMINAL FOR .205 × .020 SPADE LUG.

3 FEMALE TERMINAL FOR .205 × .020 SPADE LUG.

2 FEMALE TERMINAL FOR .110 × .020 SPADE LUG.

1 SWITCH (S1) AND BINDING POST TERMINALS TO BE ATTACHED TO TERMINAL CUP

**NOTES:** (UNLESS OTHERWISE SPECIFIED)

N8330

| ITEM | PART NO. | DESCRIPTION | QTY | REMARKS |
|---|---|---|---|---|

**BILL OF MATERIAL**

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCH SIZES
BREAK SHARP EDGES .016 inch
TOLERANCES (UNLESS OTHERWISE SPECIFIED) ANGULAR
XXX ± .005 inch ±
XX ± .010 inch
X ± .020 inch
FRACTIONAL DIMENSIONS: ± 1/32
ALL DIMENSIONS ARE FINISHED DIMENSIONS
DO NOT SCALE DRAWING

MATERIAL
FINISH
MODELS USED ON: N8330

DRAWN 3-2-87 STEVE PUSH
CHECKED 3/17/87
DESIGN MFG.
ENGR 5-8-87
APPR

JBL Incorporated
A Harman International Company
Northridge California 91329 USA

TITLE: NETWORK ASSY

SIZE C | DRAWING NO. 68253 | REV C

SCALE NONE | SHEET 1 OF 1