


CBS-Columbia, Table Model Radio

Chassis 515-1


MODELS 5165-Ebony; 5165-Ivory; 5165-Maroon

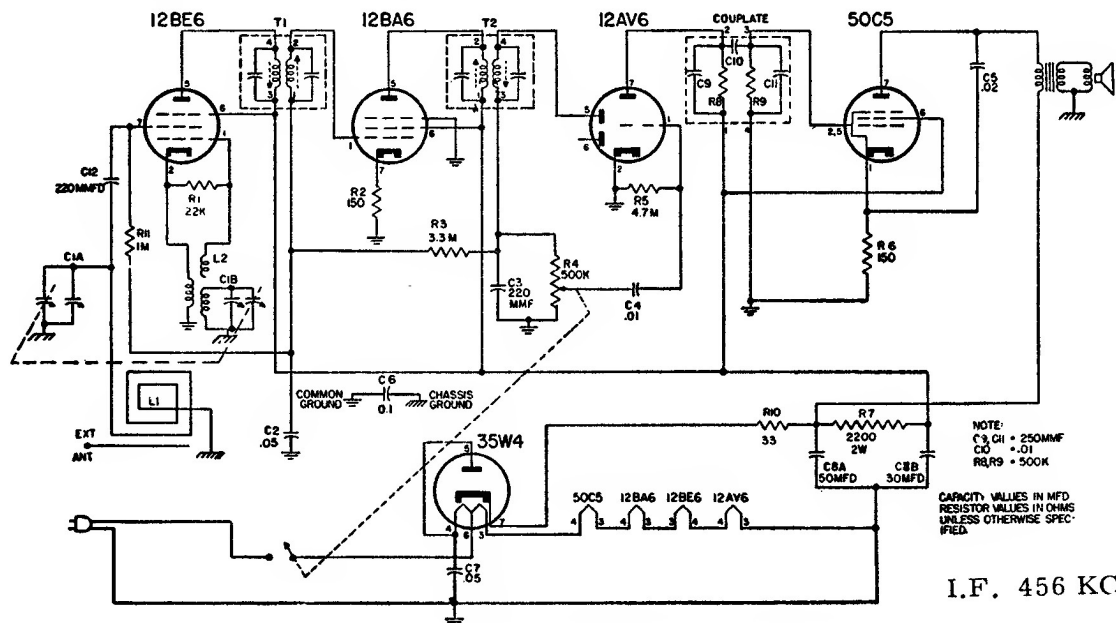



CBS-Columbia, Personal Clock Radio

Chassis 5C1

MODELS 5330-Ebony; 5330-Ivory; 5330-Gray

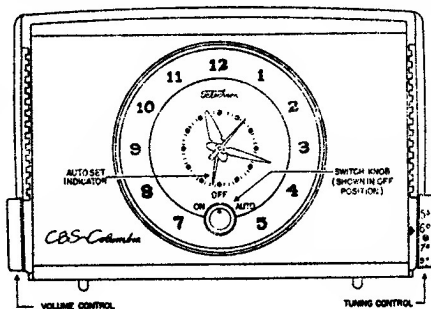

75003421

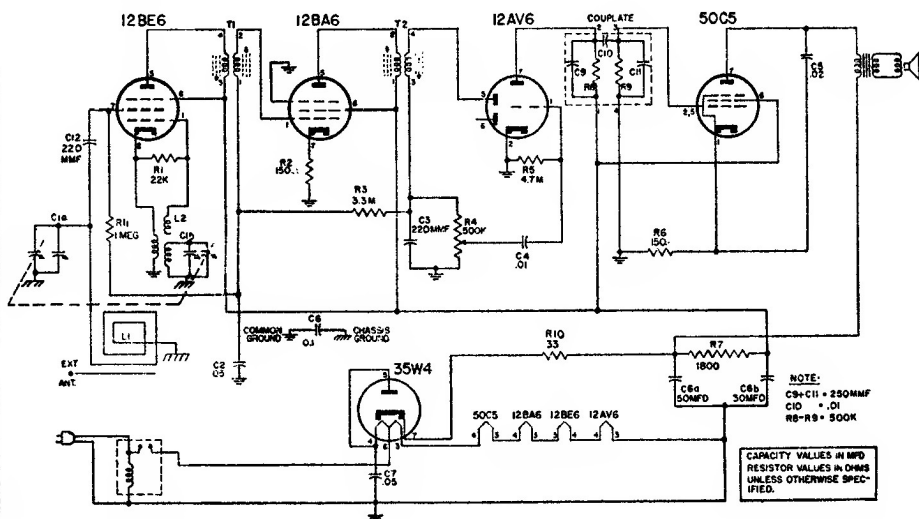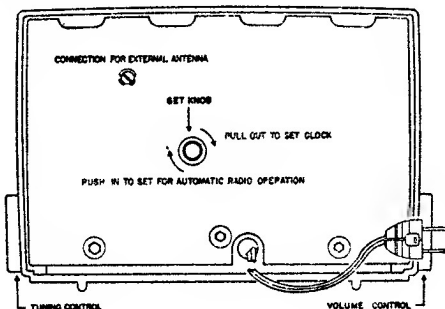

I.F. 456 KC.

Parts List

Capacitors

- C1 Variable Capacitor
- C2 Paper .05 mfd. 200V $\pm 20\%$
- C3, C12 Ceramic Tubular 220 mmf. 500V $\pm 20\%$
- C4 Paper .01 mfd. 400V $\pm 20\%$
- C5 Paper .02 mfd. 400V $\pm 20\%$
- C6 Paper .1 mfd. 400V $\pm 20\%$
- C7 Paper .05 mfd. 400V $\pm 20\%$
- C8 Electrolytic 50-30 mfd. 150V

Resistors

- R1 Carbon 22K ohm $\frac{1}{2}W \pm 10\%$
- R2, R6 Carbon 150 ohm $\frac{1}{2}W \pm 10\%$
- R3 Carbon 3.3 Megohm $\frac{1}{2}W \pm 10\%$
- R4 Control, Volume 500K ohm
- R5 Carbon 4.7 Megohm $\frac{1}{2}W \pm 10\%$
- R7 Carbon 1800 ohm $1W \pm 10\%$
- R10 Carbon 33 ohm $\frac{1}{2}W \pm 10\%$
- R11 Carbon 1.0 Megohm $\frac{1}{2}W \pm 10\%$