


CBS Columbia

Model 535

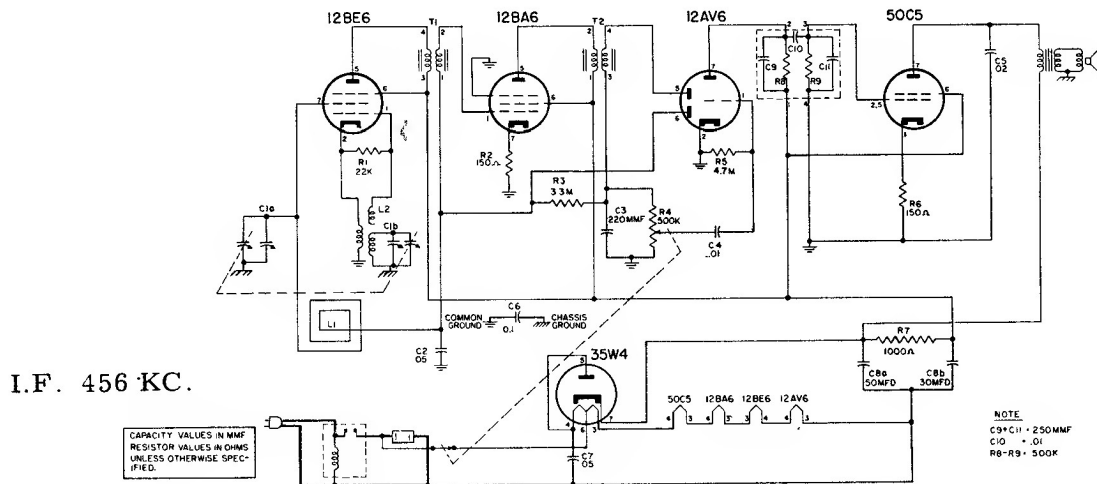

3-Way Portable Radio Chassis 4P1

MODELS 5220-Sand; 5220-Maroon; 5220-Gray; 5220-Green

Capacitors

C1A, B	24000011	Variable Capacitor
C2	23064900	Ceramic Disc, 220 mmfd. 500V $\pm 20\%$
C3	22025740	Paper, .05 mfd. 200V $\pm 20\%$
C4	23065920	Ceramic Disc, .01 mfd. 300V $\pm 20\%$
C5	23065570	Ceramic Disc, .001 mfd. 500V $\pm 10\%$
C11	23066000	Ceramic Disc, .01 mfd. 600V $\pm 20\%$
C12A, B, C	21000011	Electrolytic 60-60 mfd. 150V, 100 mfd. 25V
C13	23002660	Ceramic Tubular, 220 mmfd. 500V $\pm 20\%$
C14	22017240	Molded, .05 mfd. 400V $\pm 20\%$
C15, 17	22026280	Paper, .1 mfd. 400V $\pm 20\%$
C16	22025780	Paper, .1 mfd. 200V $\pm 20\%$

Resistors

R1	30104230	Fixed Composition, 100K Ohm $\frac{1}{2}W \pm 10\%$
R2	30472230	Fixed Composition, 4.7K Ohm $\frac{1}{2}W \pm 10\%$
R3	30106230	Fixed Composition, 10 Megohm $\frac{1}{2}W \pm 10\%$
R4	36000982	Volume Control, 2 Megohm W/SW
R9	33000061	Wirewound, 75 ohm 2W $\pm 10\%$ (Flexohm)
R10	31000011	Wirewound, 2250 ohm-Tapped 750 ohm
R11	30151130	Fixed Composition, 150 ohm $\frac{1}{2}W \pm 5\%$
R12	30681130	Fixed Composition, 680 ohm $\frac{1}{2}W \pm 5\%$
R13	30105230	Fixed Composition, 1 Megohm $\frac{1}{2}W \pm 10\%$
R14	30335230	Fixed Composition, 3.3 Megohm $\frac{1}{2}W \pm 10\%$
R15	30274230	Fixed Composition, 270k ohm $\frac{1}{2}W \pm 10\%$

